

# ZD25WQ16B

## Ultra Low Power, 16M-bit Serial Multi I/O Flash Memory Datasheet

### Performance Highlight

- ◆ *Wide Supply Range from 1.65 to 3.6V for Read, Erase and Program*
- ◆ *Ultra Low Power consumption 2.5mA for Read, Erase and Program*
- ◆ *X1, X2 and X4 Multi I/O Support*
- ◆ *High reliability with 100K cycling and 20Year-retention*
- ◆ *Page/Sector/Block Erase*
- ◆ *Fast Chip Erase time 10ms*

## Contents

|                                                        |    |
|--------------------------------------------------------|----|
| 1. Overview.....                                       | 4  |
| 1.1. General.....                                      | 4  |
| 1.2. Performance.....                                  | 4  |
| 1.3. Software features.....                            | 5  |
| 1.4. Hardware features.....                            | 5  |
| 2. Description.....                                    | 6  |
| 2.1. Pin Definition.....                               | 7  |
| 2.2. Block Diagram.....                                | 7  |
| 2.3. Memory Address Mapping.....                       | 8  |
| 3. Device Operation.....                               | 9  |
| 3.1. Mode0 and Mode3.....                              | 9  |
| 3.2. IO MODE.....                                      | 9  |
| 3.3. Hold Feature.....                                 | 10 |
| 3.4. Status Register.....                              | 11 |
| 3.5. Configure Register.....                           | 12 |
| 3.6. Data Protection.....                              | 12 |
| 4. Electrical Specifications.....                      | 16 |
| 4.1. Absolute Maximum Ratings.....                     | 16 |
| 4.2. DC Characteristics.....                           | 17 |
| 4.3. AC Characteristics.....                           | 18 |
| 4.4. AC Characteristics for Program and Erase.....     | 19 |
| 4.5. Operation Conditions.....                         | 21 |
| 5. Commands.....                                       | 23 |
| 5.1. Commands listing.....                             | 23 |
| 5.2. Write Enable (WREN).....                          | 26 |
| 5.3. Write Disable (WRDI).....                         | 26 |
| 5.4. Write Enable for Volatile Status Register.....    | 27 |
| 5.5. Read Status Register (RDSR).....                  | 28 |
| 5.6. Read Configure Register (RDCR).....               | 28 |
| 5.7. Active Status Interrupt (ASI).....                | 29 |
| 5.8. Write Status Register (WRSR).....                 | 29 |
| 5.9. Write Configure Register (WRCR).....              | 30 |
| 5.10. Read Data Bytes (READ).....                      | 31 |
| 5.11. Read Data Bytes at Higher Speed (FAST_READ)..... | 31 |
| 5.12. Dual Read Mode (DREAD).....                      | 33 |
| 5.13. 2 X IO Read Mode (2READ).....                    | 34 |
| 5.14. 2 X IO Read Performer Enhance Mode.....          | 35 |
| 5.15. Quad Read Mode (QREAD).....                      | 36 |
| 5.16. 4 X IO Read Mode (4READ).....                    | 37 |
| 5.17. 4 X IO Read Performance Enhance.....             | 38 |
| 5.18. Burst Read.....                                  | 39 |
| 5.19. Page Erase (PE).....                             | 39 |
| 5.20. Sector Erase (SE).....                           | 40 |
| 5.21. Block Erase (BE32K).....                         | 40 |
| 5.22. Block Erase (BE).....                            | 41 |
| 5.23. Chip Erase (CE).....                             | 41 |
| 5.24. Page Program (PP).....                           | 42 |
| 5.25. Dual Input Page Program (DPP).....               | 43 |
| 5.26. Quad Page Program (QPP).....                     | 44 |

---

|       |                                                                          |    |
|-------|--------------------------------------------------------------------------|----|
| 5.27. | Erase Security Registers (ERSCUR).....                                   | 45 |
| 5.28. | Program Security Registers (PRSCUR).....                                 | 46 |
| 5.29. | Erase Security Registers (RDSCUR).....                                   | 47 |
| 5.30. | Deep Power-down (DP).....                                                | 48 |
| 5.31. | Release from Deep Power-Down (RDP), Read Electronic Signature (RES)..... | 49 |
| 5.32. | Read Electronic Manufacturer ID & Device ID (REMS).....                  | 50 |
| 5.33. | Dual I/O Read Electronic Manufacturer ID & Device ID (DREMS).....        | 51 |
| 5.34. | Quad I/O Read Electronic Manufacturer ID & Device ID (QREMS).....        | 52 |
| 5.35. | Read Identification (RDID).....                                          | 53 |
| 5.36. | Program/Erase Suspend/Resume.....                                        | 53 |
| 5.37. | Erase Suspend to Program.....                                            | 55 |
| 5.38. | Program Resume and Erase Resume.....                                     | 55 |
| 5.39. | No Operation (NOP).....                                                  | 56 |
| 5.40. | Software Reset (RSTEN/RST).....                                          | 56 |
| 5.41. | Read Unique ID (RUID).....                                               | 57 |
| 5.42. | Read SFDP Mode (RDSFDP).....                                             | 58 |
| 6.    | Ordering Information.....                                                | 63 |
| 7.    | Package Information.....                                                 | 64 |
| 7.1.  | 8-Lead SOP(150mil).....                                                  | 64 |
| 7.2.  | 8-Lead SOP(208mil).....                                                  | 65 |
| 7.3.  | 8-Lead TSSOP(173mil).....                                                | 66 |
| 7.4.  | 8-Land USON(3x2mm).....                                                  | 67 |
| 7.5.  | 8-Land WSON(6x5mm).....                                                  | 68 |
| 8.    | Revision History.....                                                    | 69 |

## 1. Overview

### 1.1. General

- Single 1.65V to 3.60V supply
  - 1.65V-3.6V for Read, Erase and Program Operations
- Industrial Temperature Range -40C to 85C
- Serial Peripheral Interface (SPI) Compatible:
  - Mode 0 and Mode 3
- Single, Dual and Quad IO mode
  - 16M x 1 bit
  - 8M x 2 bits
  - 4M x 4 bits
- Flexible Architecture for Code and Data Storage
  - Uniform 256-byte Page Program
  - Uniform 256-byte Page Erase
  - Uniform 4K-byte Sector Erase
  - Uniform 32K/64K-byte Block Erase
  - Full Chip Erase

### 1.2. Performance

- Fast read
  - 4 I/O 104MHz with 2+4 dummy cycles, equivalent to 320M
  - 2 I/O 104MHz with 4 dummy cycles, equivalent to 160M
  - 1 I/O 104MHz with 8 dummy cycles
- Fast Program and Erase Speed
  - 1.3ms Page program time
  - 10ms Page erase time
  - 10ms 4K-byte sector erase time
  - 10ms 32K-byte block erase time
  - 10ms 64K-byte block erase time
- Burst read
  - 8/16/32/64 byte Wrap-Around
- Ultra Low Power Consumption
  - 0.1uA Deep Power Down current
  - 12uA Standby current
  - 4mA Active Read current at 33MHz
  - 6mA Active Program or Erase current
- High Reliability
  - 100,000 Program / Erase Cycles
  - 20-year Data Retention

### 1.3. Software features

- One Time Programmable (OTP) Security Register
  - 3\*512-Byte Security Registers With OTP Lock
- Software Protection Mode
  - The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits define the section of the memory array that can be read but not change.
- 128 bit unique ID for each device
- Program/Erase Suspend and Program/Erase Resume
- JEDEC Standard Manufacturer and Device ID Read Methodology

### 1.4. Hardware features

- Hardware Protection Mode
  - Hardware Controlled Locking of Protected Sectors by WP Pin
- Industry Standard Green Package Options
  - 8-pin SOP (150mil/208mil)
  - 8-land USON (3x2x0.55mm)
  - 8-land WSON (6x5mm)
  - 8-pin TSSOP
  - WLCSP
  - KGD for SiP

## 2. Description

The ZD25WQ16B is a serial interface Flash memory device designed for use in a wide variety of high-volume consumer based applications in which program code is shadowed from Flash memory into embedded or external RAM for execution. The flexible erase architecture of the device, with its page erase granularity it is ideal for data storage as well, eliminating the need for additional data storage devices.


The erase block sizes of the device have been optimized to meet the needs of today's code and data storage applications. By optimizing the size of the erase blocks, the memory space can be used much more efficiently. Because certain code modules and data storage segments must reside by themselves in their own erase regions, the wasted and unused memory space that occurs with large sectorized and large block erase Flash memory devices can be greatly reduced. This increased memory space efficiency allows additional code routines and data storage segments to be added while still maintaining the same overall device density.

The device also contains an additional 3\*512-byte security registers with OTP lock (One-Time Programmable), can be used for purposes such as unique device serialization, system-level Electronic Serial Number (ESN) storage, locked key storage, etc.

Specifically designed for use in many different systems, the device supports read, program, and erase operations with a wide supply voltage range of 1.65V to 3.6V. No separate voltage is required for programming and erasing.

## 2.1. Pin Definition

### Pin Configurations

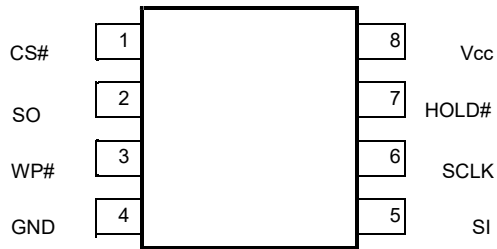


8-PIN SOP (150mil/200mil) and TSSOP

### Pin Descriptions

| No. | Symbol | Extension | Remarks                                                                                                  |
|-----|--------|-----------|----------------------------------------------------------------------------------------------------------|
| 1   | CS#    |           | Chip select                                                                                              |
| 2   | SO     | SIO1      | Serial data output for 1 x I/O<br>Serial data input and output for 4 x I/O read mode                     |
| 3   | WP#    | SIO2      | Write protection active low<br>Serial data input and output for 4 x I/O read mode                        |
| 4   | GND    | -         | Ground of the device                                                                                     |
| 5   | SI     | SIO0      | Serial data input for 1x I/O<br>Serial data input and output for 4 x I/O read mode                       |
| 6   | SCLK   | -         | Serial interface clock input                                                                             |
| 7   | HOLD#  | SIO3      | To pause the device without deselecting the device<br>Serial data input and output for 4 x I/O read mode |
| 8   | VCC    | -         | Power supply of the device                                                                               |

## 2.2. Block Diagram

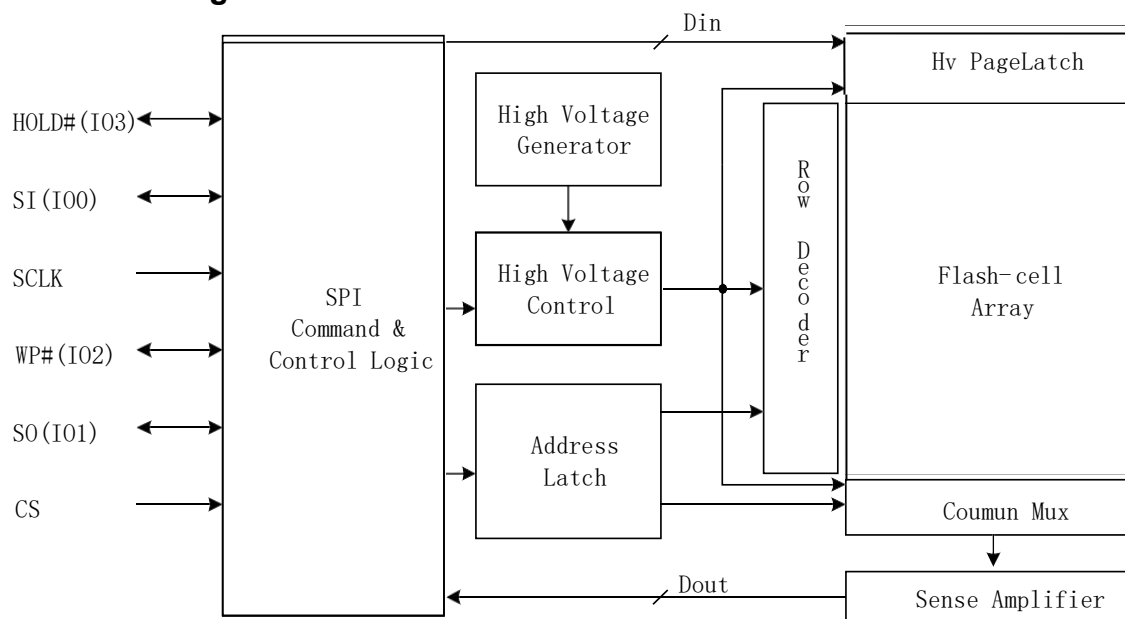

## 2.3. Memory Address Mapping

The memory array can be erased in three levels of granularity including a full chip erase. The size of the erase blocks is optimized for both code and data storage applications, allowing both code and data segments to reside in their own erase regions.

ZD25WQ16B Memory Organization

| Block64K | Block32K | Sector | Address Range |           |
|----------|----------|--------|---------------|-----------|
| 31       | 63 - 62  | 512    | 1FF000H       | 1FFFFFFH  |
|          |          | .....  | .....         | .....     |
|          |          | 496    | 1F0000H       | 1F0FFFFH  |
| 30       | 61 - 60  | 495    | 1EF000H       | 1EFFFFFFH |
|          |          | .....  | .....         | .....     |
|          |          | 480    | 1E0000H       | 1E0FFFFH  |
| .....    | .....    | .....  | .....         | .....     |
|          |          | .....  | .....         | .....     |
|          |          | .....  | .....         | .....     |
| .....    | .....    | .....  | .....         | .....     |
|          |          | .....  | .....         | .....     |
|          |          | .....  | .....         | .....     |
| 2        | 5 - 4    | 47     | 02F000H       | 02FFFFFFH |
|          |          | .....  | .....         | .....     |
|          |          | 32     | 020000H       | 020FFFFH  |
| 1        | 3 - 2    | 31     | 01F000H       | 01FFFFFFH |
|          |          | .....  | .....         | .....     |
|          |          | 16     | 010000H       | 010FFFFH  |
| 0        | 1 - 0    | 15     | 00F000H       | 00FFFFFFH |
|          |          | .....  | .....         | .....     |
|          |          | 0      | 000000H       | 000FFFFH  |

### 3. Device Operation

#### 3.1. Mode0 and Mode3

Before a command is issued, status register should be checked to ensure device is ready for the intended operation.


When incorrect command is inputted to this LSI, this LSI becomes standby mode and keeps the standby mode until next CS# falling edge. In standby mode, SO pin of this LSI should be High-Z. When correct command is inputted to this LSI, this LSI becomes active mode and keeps the active mode until next CS# rising edge.

Input data is latched on the rising edge of Serial Clock (SCLK) and data shifts out on the falling edge of SCLK. The difference of serial peripheral interface mode 0 and mode 3 is shown as Figure 9-1.

For the following instructions: RDID, RDSR, RDSR1, RDSCUR, READ, FAST\_READ, DREAD, 2READ, 4READ, QREAD, RDSFDP, RES, REMS, DREMS, QREMS, the shifted-in instruction sequence is followed by a data-out sequence. After any bit of data being shifted out, the CS# can be high. For the following instructions: WREN, WRDI, WRSR, PE, SE, BE32K, BE, CE, PP, DPP, QPP, DP, ERSCUR, PRSCUR, SUSPEND, RESUME, RSTEN, RST, the CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.

During the progress of Write Status Register, Program, Erase operation, to access the memory array is neglected and not affect the current operation of Write Status Register, Program, Erase.

**Figure 3-1 Serial Peripheral Interface Modes Supported**

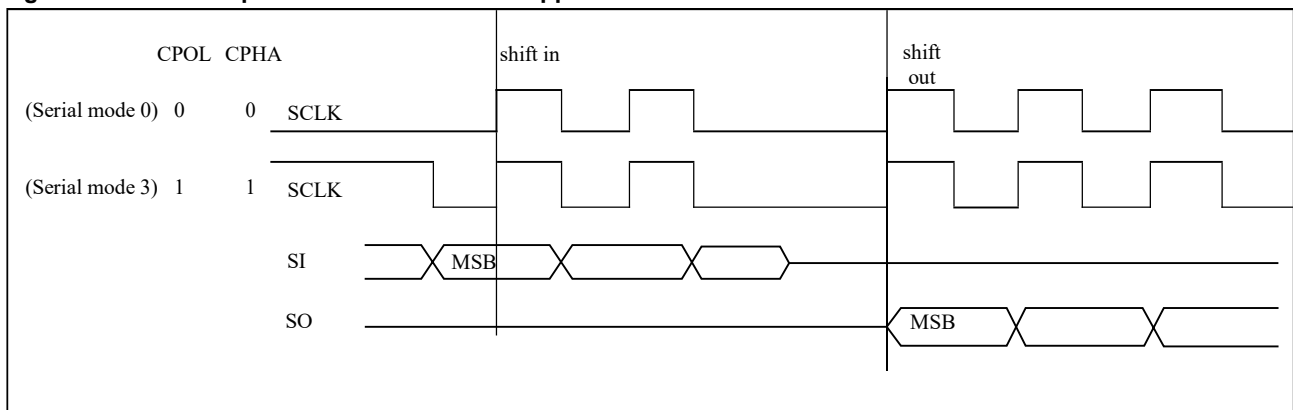

**Note:**

CPOL indicates clock polarity of serial master, CPOL=1 for SCLK high while idle, CPOL=0 for SCLK low while not transmitting. CPHA indicates clock phase. The combination of CPOL bit and CPHA bit decides which serial mode is supported.

#### 3.2. IO MODE

##### Standard SPI

The ZD25WQ16B features a serial peripheral interface on 4 signals bus: Serial Clock (SCLK), Chip Select (CS#), Serial Data Input (SI) and Serial Data Output (SO). Both SPI bus mode 0 and 3 are supported. Input data is latched on the rising edge of SCLK and data shifts out on the falling edge of SCLK.

##### Dual SPI

The ZD25WQ16B supports Dual SPI operation when using the “Dual Output Fast Read” and “Dual I/O Fast

Read”(3BHand BBH) commands. These commands allow data to be transferred to or from the device

at two times the rate of the standard SPI. When using the Dual SPI command the SI and SO pins become bidirectional I/O pins: IO0 and IO1.

#### Quad SPI


The ZD25WQ16B supports Quad SPI operation when using the “Quad Output Fast Read,” Quad I/O Fast Read”(6BH,EBH) commands. These commands allow data to be transferred to or from the device at four times the rate of the standard SPI. When using the Quad SPI command the SI and SO pins become bidirectional I/O pins: IO0 and IO1, and WP# and HOLD# pins become IO2 and IO3. Quad SPI commands require the non-volatile Quad Enable bit(QE) in Status Register to be set.

### 3.3. Hold Feature

HOLD# pin signal goes low to hold any serial communications with the device. The HOLD feature will not stop the operation of write status register, programming, or erasing in progress

The operation of HOLD requires Chip Select(CS#) keeping low and starts on falling edge of HOLD# pin signal while Serial Clock (SCLK) signal is being low (if Serial Clock signal is not being low, HOLD operation will not start until Serial Clock signal being low).The HOLD condition ends on the rising edge of HOLD# pin signal while Serial Clock(SCLK) signal is being low( if Serial Clock signal is not being low, HOLD operation will not end until Serial Clock being low).

**Figure 3-2 Hold Condition Operation**

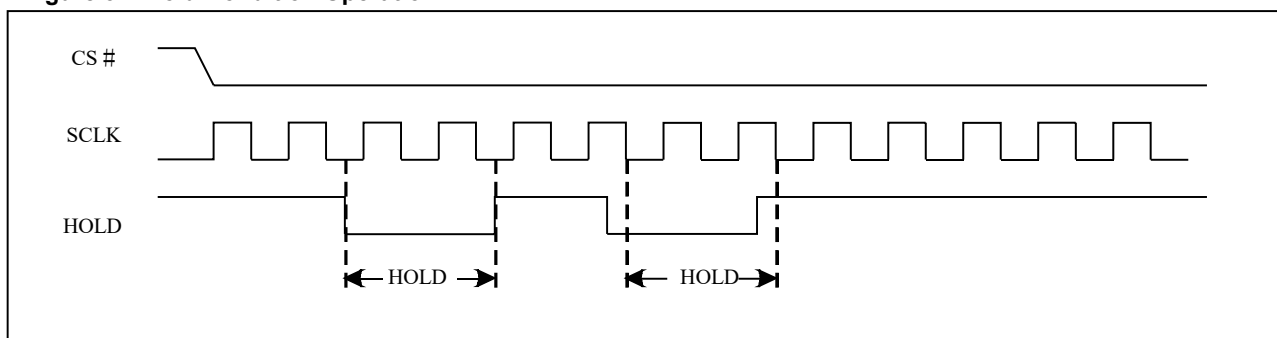

During the HOLD operation, the Serial Data Output (SO) is high impedance when Hold# pin goes low and will keep high impedance until Hold# pin goes high. The Serial Data Input (SI) is don't care if both Serial Clock (SCLK) and Hold# pin goes low and will keep the state until SCLK goes low and Hold# pin goes high. If Chip Select (CS#) drives high during HOLD operation, it will reset the internal logic of the device. To re-start communication with chip, the HOLD# must be at high and CS# must be at low.

**Note:** The HOLD feature is disabled during Quad I/O mode.

### 3.4. Status Register

|      |     |     |     |     |      |    |      |
|------|-----|-----|-----|-----|------|----|------|
| S15  | S14 | S13 | S12 | S11 | S10  | S9 | S8   |
| SUS1 | CMP | LB3 | LB2 | LB1 | SUS2 | QE | SRP1 |

|      |     |     |     |     |     |     |     |
|------|-----|-----|-----|-----|-----|-----|-----|
| S7   | S6  | S5  | S4  | S3  | S2  | S1  | S0  |
| SRP0 | BP4 | BP3 | BP2 | BP1 | BP0 | WEL | WIP |

The definition of the status register bits is as below:

#### WIP bit.

The Write in Progress (WIP) bit indicates whether the memory is busy in program/erase/write status register progress. When WIP bit sets to 1, means the device is busy in program/erase/write status register progress, when WIP bit sets 0, means the device is not in program/erase/write status register progress.

#### WEL bit.

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1 the internal Write Enable Latch is set, when set to 0 the internal Write Enable Latch is reset and no Write Status Register, Program or Erase command is accepted.

#### BP4, BP3, BP2, BP1, BP0 bits.

The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits are non-volatile. They define the size of the area to be software protected against Program and Erase commands. These bits are written with the Write Status Register (WRSR) command. When the Block Protect (BP4, BP3, BP2, BP1, BP0) bits are set to 1, the relevant memory area (as defined in Table "Protected Area Sizes"). becomes protected against Page Program (PP), Page Erase (PE), Sector Erase (SE) and Block Erase (BE) commands. The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits can be written provided that the Hardware Protected mode has not been set. The Chip Erase (CE) command is executed, only if the Block Protect (BP4, BP3, BP2, BP1 and BP0) are set to "None protected".

#### SRP1, SRP0 bits.

The Status Register Protect (SRP1 and SRP0) bits are non-volatile Read/Write bits in the status register. The SRP bits control the method of write protection: software protection, hardware protection, power supply lock-down or one time programmable protection

| SRP1 | SRP0 | WP# | Status Register           | Description                                                                                             |
|------|------|-----|---------------------------|---------------------------------------------------------------------------------------------------------|
| 0    | 0    | x   | Software Protected        | The Status Register can be written to after a Write Enable command, WEL=1.(Default)                     |
| 0    | 1    | 0   | Hardware Protected        | WP#=0, the Status Register locked and can not be write to.                                              |
| 0    | 1    | 1   | Hardware Unprotected      | WP#=1, the Status Register is unlocked and can be written to after a Write Enable command, WEL=1.       |
| 1    | 0    | x   | Power Supply Lock-Down(1) | Status Register is protected and can not be written to again until the next Power-Down, Power-Up cycle. |
| 1    | 1    | x   | One Time Program(2)       | Status Register is permanently protected and can not be written to.                                     |

#### NOTE:

1. When SRP1, SRP0=(1, 0), a Power-Down, Power-Up cycle will change SRP1, SRP0 to (0, 0) state.
2. This feature is available on special order. Please contact Zetta for details.

**QE bit.**

The Quad Enable (QE) bit is a non-volatile Read/Write bit in the Status Register that allows Quad operation. When the QE bit is set to 0 (Default) the WP# pin and HOLD# pin are enable. When the QE pin is set to 1, the Quad IO2 and IO3 pins are enabled. (The QE bit should never be set to 1 during standard SPI or Dual SPI operation if the WP# or HOLD# pins are tied directly to the power supply or ground)

**LB3, LB2, LB1, bits.**

The LB3, LB2, LB1, bits are non-volatile One Time Program (OTP) bits in Status Register (S13-S11) that provide the write protect control and status to the Security Registers. The default state of LB3-LB1 are 0, the security registers are unlocked. The LB3-LB1 bits can be set to 1 individually using the Write Register instruction. The LB3-LB1 bits are One Time Programmable, once its set to 1, the Security Registers will become read-only permanently.

**CMP bit**

The CMP bit is a non-volatile Read/Write bit in the Status Register (S14). It is used in conjunction the BP4-BP0 bits to provide more flexibility for the array protection. Please see the table "Protected Area Size" for details. The default setting is CMP=0.

**SUS1, SUS2 bit**

The SUS1 and SUS2 bit are read only bit in the status register (S15 and S10) that are set to 1 after interrupting an program/erase/write status register progress by Program/Erase Suspend (75H or B0H) command (The Erase Suspend will set the SUS1 to 1, and the Program Suspend will set the SUS2 to 1). The SUS1 and SUS2 bit are cleared to 0 by Program/Erase Resume (7AH or 30H) command as well as a power-down, power-up cycle.

### 3.5. Configure Register

| S7 | S6       | S5       | S4       | S3       | S2       | S1      | S0       |
|----|----------|----------|----------|----------|----------|---------|----------|
| DP | Reserved | Reserved | Reserved | Reserved | Reserved | Reserve | Reserved |

The definition of the configure register bits is as below:

**DP bit.**

The Dual Page (DP) bit is a non-volatile Read/Write bit in the Configure Register that allows Dual Page operation. When the DP bit is set to 0 (Default) the page size is 256 bytes. When the DP pin is set to 1, the page size is 512 bytes.

This bit controls the page programming buffer address wrap point. Legacy SPI devices generally have used a 256 Byte page programming buffer and defined that if data is loaded into the buffer beyond the 255 Byte location, the address at which additional bytes are loaded would be wrapped to address zero of the buffer. The P25Q08U provides a 512 Byte page programming buffer that can increase programming performance. For legacy software compatibility, this configuration bit provides the option to continue the wrapping behavior at the 256 Byte boundary or to enable full use of the available 512 Byte buffer by not wrapping the load address at the 256 Byte boundary.

When the DP pin is set to 1, the page erase instruction (81h) will erase the data of the chosen Dual Page to be "1".

### 3.6. Data Protection

During power transition, there may be some false system level signals which result in inadvertent erasure or programming. The device is designed to protect itself from these accidental write cycles.

The state machine will be reset as standby mode automatically during power up. In addition, the control

register architecture of the device constrains that the memory contents can only be changed after specific command sequences have completed successfully.

In the following, there are several features to protect the system from the accidental write cycles during VCC power-up and power-down or from system noise.

- Power-on reset: to avoid sudden power switch by system power supply transition, the power-on reset may protect the Flash.
- Valid command length checking: The command length will be checked whether it is at byte base and completed on byte boundary.
- Write Enable (WREN) command: WREN command is required to set the Write Enable Latch bit (WEL) before issuing other commands to change data.
- Software Protection Mode: The Block Protect (BP4, BP3, BP2, BP1, and BP0) bits define the section of the memory array that can be read but not change.
- Hardware Protection Mode: WP# going low to protected the BP0~BP4bits and SRP0~1bits
- Deep Power-Down Mode: By entering deep power down mode, the flash device is under protected from writing all commands except the Release from Deep Power-Down Mode command.

Table 3-1. Protected Area Sizes

**ZD25WQ16B Protected Area Sizes (CMP bit = 0)**

| Status Register Content |     |     |     |     | Memory Content |                  |         |              |
|-------------------------|-----|-----|-----|-----|----------------|------------------|---------|--------------|
| BP4                     | BP3 | BP2 | BP1 | BP0 | Blocks         | Addresses        | Density | Portion      |
| X                       | X   | 0   | 0   | 0   | NONE           | NONE             | NONE    | NONE         |
| 0                       | 0   | 0   | 0   | 1   | 31             | 1F0000H-1FFFFFFH | 64KB    | Upper 1/32   |
| 0                       | 0   | 0   | 1   | 0   | 30 to 31       | 1E0000H-1FFFFFFH | 128KB   | Upper 1/16   |
| 0                       | 0   | 0   | 1   | 1   | 28 to 31       | 1C0000H-1FFFFFFH | 256KB   | Upper 1/8    |
| 0                       | 0   | 1   | 0   | 0   | 24 to 31       | 180000H-1FFFFFFH | 512KB   | Upper 1/4    |
| 0                       | 0   | 1   | 0   | 1   | 16 to 31       | 100000H-1FFFFFFH | 1MB     | Upper 1/2    |
| 0                       | 1   | 0   | 0   | 1   | 0              | 000000H-00FFFFH  | 64KB    | Lower 1/32   |
| 0                       | 1   | 0   | 1   | 0   | 0 to 1         | 000000H-01FFFFH  | 128KB   | Lower 1/16   |
| 0                       | 1   | 0   | 1   | 1   | 0 to 3         | 000000H-03FFFFH  | 256KB   | Lower 1/8    |
| 0                       | 1   | 1   | 0   | 0   | 0 to 7         | 000000H-07FFFFH  | 512KB   | Lower 1/4    |
| 0                       | 1   | 1   | 0   | 1   | 0 to 15        | 000000H-0FFFFFFH | 1MB     | Lower 1/2    |
| X                       | X   | 1   | 1   | X   | 0 to 31        | 000000H-1FFFFFFH | 2MB     | ALL          |
| 1                       | 0   | 0   | 0   | 1   | 31             | 1FF000H-1FFFFFFH | 4KB     | Top Block    |
| 1                       | 0   | 0   | 1   | 0   | 31             | 1FE000H-1FFFFFFH | 8KB     | Top Block    |
| 1                       | 0   | 0   | 1   | 1   | 31             | 1FC000H-1FFFFFFH | 16KB    | Top Block    |
| 1                       | 0   | 1   | 0   | X   | 31             | 1F8000H-1FFFFFFH | 32KB    | Top Block    |
| 1                       | 1   | 0   | 0   | 1   | 0              | 000000H-000FFFH  | 4KB     | Bottom Block |
| 1                       | 1   | 0   | 1   | 0   | 0              | 000000H-001FFFH  | 8KB     | Bottom Block |
| 1                       | 1   | 0   | 1   | 1   | 0              | 000000H-003FFFH  | 16KB    | Bottom Block |
| 1                       | 1   | 1   | 0   | X   | 0              | 000000H-007FFFH  | 32KB    | Bottom Block |

**ZD25WQ16B Protected Area Sizes (CMP bit = 1)**

| Status Register Content |     |     |     |     | Memory Content |                   |         |               |
|-------------------------|-----|-----|-----|-----|----------------|-------------------|---------|---------------|
| BP4                     | BP3 | BP2 | BP1 | BP0 | Blocks         | Addresses         | Density | Portion       |
| X                       | X   | 0   | 0   | 0   | 0 to 31        | 000000H-1FFFFFFH  | 2MB     | ALL           |
| 0                       | 0   | 0   | 0   | 1   | 0 to 30        | 000000H-1EFFFFFFH | 1984KB  | Lower 31/32   |
| 0                       | 0   | 0   | 1   | 0   | 0 to 29        | 000000H-1DFFFFFFH | 1920KB  | Lower 15/16   |
| 0                       | 0   | 0   | 1   | 1   | 0 to 27        | 000000H-1BFFFFFFH | 1792KB  | Lower 7/8     |
| 0                       | 0   | 1   | 0   | 0   | 0 to 23        | 000000H-17FFFFFFH | 1536KB  | Lower 3/4     |
| 0                       | 0   | 1   | 0   | 1   | 0 to 15        | 000000H-0FFFFFFH  | 1MB     | Lower 1/2     |
| 0                       | 1   | 0   | 0   | 1   | 1 to 31        | 010000H-1FFFFFFH  | 1984KB  | Upper 31/32   |
| 0                       | 1   | 0   | 1   | 0   | 2 to 31        | 020000H-1FFFFFFH  | 1920KB  | Upper 15/16   |
| 0                       | 1   | 0   | 1   | 1   | 4 to 31        | 040000H-1FFFFFFH  | 1792KB  | Upper 7/8     |
| 0                       | 1   | 1   | 0   | 0   | 8 to 31        | 080000H-1FFFFFFH  | 1536KB  | Upper 3/4     |
| 0                       | 1   | 1   | 0   | 1   | 16 to 31       | 100000H-1FFFFFFH  | 1MB     | Upper 1/2     |
| X                       | X   | 1   | 1   | X   | NONE           | NONE              | NONE    | NONE          |
| 1                       | 0   | 0   | 0   | 1   | 0 to 31        | 000000H-1FEFFFFH  | 2044KB  | Lower 511/512 |
| 1                       | 0   | 0   | 1   | 0   | 0 to 31        | 000000H-1FDFFFFH  | 2040KB  | Lower 255/256 |
| 1                       | 0   | 0   | 1   | 1   | 0 to 31        | 000000H-1FBFFFFH  | 2032KB  | Lower 127/128 |
| 1                       | 0   | 1   | 0   | X   | 0 to 31        | 000000H-1F7FFFFH  | 2016KB  | Lower 63/64   |
| 1                       | 1   | 0   | 0   | 1   | 0 to 31        | 001000H-1FFFFFFH  | 2044KB  | Upper 511/512 |
| 1                       | 1   | 0   | 1   | 0   | 0 to 31        | 002000H-1FFFFFFH  | 2040KB  | Upper 255/256 |
| 1                       | 1   | 0   | 1   | 1   | 0 to 31        | 004000H-1FFFFFFH  | 2032KB  | Upper 127/128 |
| 1                       | 1   | 1   | 0   | X   | 0 to 31        | 008000H-1FFFFFFH  | 2016KB  | Upper 63/64   |

Note:

1. X=don't care
2. If any erase or program command specifies a memory that contains protected data portion, this command will be ignored.

## 4. Electrical Specifications


### 4.1. Absolute Maximum Ratings

| Parameters                                | Value           |
|-------------------------------------------|-----------------|
| Storage Temperature                       | -65°C to +150°C |
| Operation Temperature                     | -40°C to +125°C |
| Maximum Operation Voltage                 | 4.0V            |
| Voltage on Any Pin with respect to Ground | -0.6V to + 4.1V |
| DC Output Current                         | 5.0 mA          |


**NOTICE:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Figure 4-1 Maximum Overshoot Waveform**

Maximum Negative Overshoot Waveform

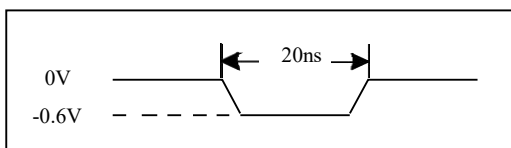

Maximum Positive Overshoot Waveform

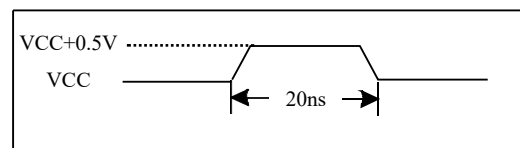


**Table 4-1 Pin Capacitance [1]**

| Symbol           | Parameter          | Max. | Units | Test Condition        |
|------------------|--------------------|------|-------|-----------------------|
| C <sub>OUT</sub> | Output Capacitance | 8    | pF    | V <sub>OUT</sub> =GND |
| C <sub>IN</sub>  | Input Capacitance  | 6    | pF    | V <sub>IN</sub> =GND  |


**Note:**

Test Conditions: T<sub>A</sub> = 25°C, F = 1MHz, V<sub>CC</sub> = 3.0V.

**Figure 4-2 Input Test Waveforms and Measurement Level**

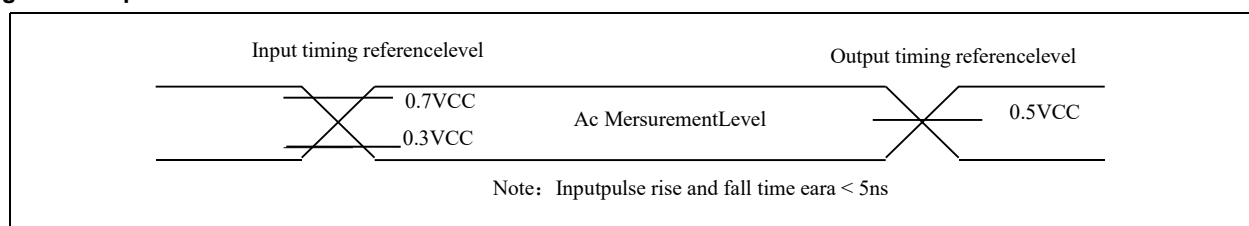

**Figure 4-3 Output Loading**

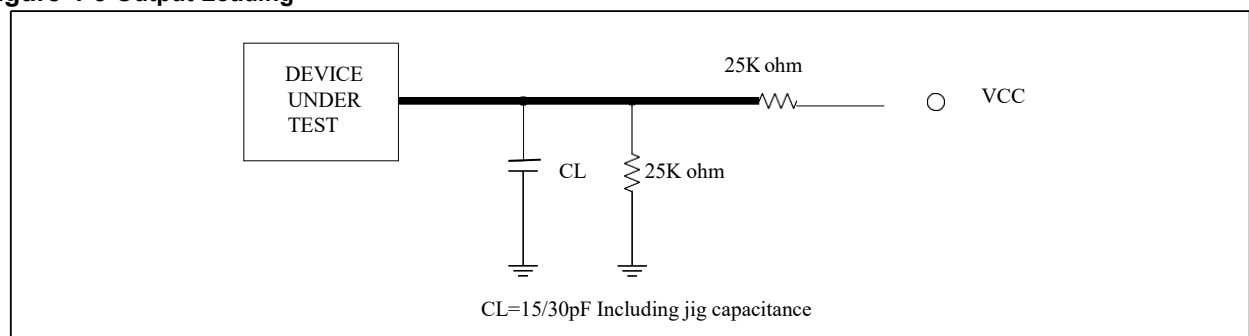

## 4.2. DC Characteristics

| Sym.             | Parameter                    | Conditions                                                      | 1.65V to 2.3V        |      |                    | 2.3V to 3.6V         |      |                    | Units |
|------------------|------------------------------|-----------------------------------------------------------------|----------------------|------|--------------------|----------------------|------|--------------------|-------|
|                  |                              |                                                                 | Min.                 | Typ. | Max.               | Min.                 | Typ. | Max.               |       |
| I <sub>DPD</sub> | Deep power down current      | CS#=V <sub>cc</sub> , all other inputs at 0V or V <sub>cc</sub> |                      | 0.5  | 1.5                |                      | 0.5  | 1.5                | uA    |
| I <sub>SB</sub>  | Standby current              | CS#, HOLD#, WP#=V <sub>IH</sub><br>all inputs at CMOS           |                      | 12   |                    |                      | 12   |                    | uA    |
| I <sub>CC1</sub> | Low power read current (03h) | f=33MHz; IOUT=0mA                                               |                      | 1.3  | 3.0                |                      | 2.3  | 3.0                | mA    |
| I <sub>CC2</sub> | Read current (0Bh)           | f=80MHz; IOUT=0mA                                               |                      | 1.8  | 4.0                |                      | 2.8  | 4.0                | mA    |
|                  |                              | f=85MHz; IOUT=0mA                                               |                      | -    | -                  |                      | 2.8  | 4.5                | mA    |
| I <sub>CC3</sub> | Program current              | CS#=V <sub>cc</sub>                                             |                      | 2.5  | 6.0                |                      | 5.0  | 6.0                | mA    |
| I <sub>CC4</sub> | Erase current                | CS#=V <sub>cc</sub>                                             |                      | 2.5  | 6.0                |                      | 5.0  | 6.0                | mA    |
| I <sub>LI</sub>  | Input load current           | All inputs at CMOS                                              |                      |      | 1.0                |                      |      | 1.0                | uA    |
| I <sub>Lo</sub>  | Output leakage               | All inputs at CMOS                                              |                      |      | 1.0                |                      |      | 1.0                | uA    |
| V <sub>IL</sub>  | Input low voltage            |                                                                 |                      |      | 0.2V <sub>cc</sub> |                      |      | 0.3V <sub>cc</sub> | V     |
| V <sub>IH</sub>  | Input high voltage           |                                                                 | 0.8V <sub>cc</sub>   |      |                    | 0.7V <sub>cc</sub>   |      |                    | V     |
| V <sub>OL</sub>  | Output low voltage           | IOL=100uA                                                       |                      |      | 0.2                |                      |      | 0.2                | V     |
| V <sub>OH</sub>  | Output high voltage          | IOH=-100uA                                                      | V <sub>cc</sub> -0.2 |      |                    | V <sub>cc</sub> -0.2 |      |                    | V     |

**Table 4-2 DC parameters**

**Note**

1. Typical values measured at 1.8V @ 25°C for the 1.65V to 3.6V range.
2. Typical values measured at 3.0V @ 25°C for the 2.3V to 3.6V range.

### 4.3.AC Characteristics

Table 4-3 AC parameters

| Symbol   | Alt. | Parameter                                                                                          | 1.65V~2.3V |   |     | 2.3V~3.6V |     |     | Unit |
|----------|------|----------------------------------------------------------------------------------------------------|------------|---|-----|-----------|-----|-----|------|
|          |      |                                                                                                    | min        |   | max | min       | typ | max |      |
| fSCLK    | fC   | Clock Frequency for the following instructions: FAST_READ, RDSFDP, PP, SE, BE32K, BE, CE, DP, RES, | D.C.       |   | 80  |           |     | 85  | MHz  |
| fRCLK    | fR   | Clock Frequency for READ instructions                                                              |            |   | 33  |           |     | 33  | MHz  |
| fTCLK    | fT   | Clock Frequency for 2READ,DREAD instructions                                                       |            |   | 80  |           |     | 85  | MHz  |
|          | fQ   | Clock Frequency for 4READ,QREAD instructions                                                       |            |   | 80  |           |     | 85  | MHz  |
| fQPP     |      | Clock Frequency for QPP (Quad page program)                                                        |            |   | 80  |           |     | 85  | MHz  |
| tCH(1)   | tCLH | Clock High Time                                                                                    | 5.5        |   |     | 4.5       |     |     | ns   |
| tCL(1)   | tCLL | Clock Low Time (fSCLK) 45% x (1fSCLK)                                                              | 5.5        |   |     | 4.5       |     |     | ns   |
| tCLCH(7) |      | Clock Rise Time (peak to peak)                                                                     | 0.1        |   |     | 0.1       |     |     | ns/v |
| tCHCL(7) |      | Clock Fall Time (peak to peak)                                                                     | 0.1        |   |     | 0.1       |     |     | ns/v |
| tSLCH    | tCSS | CS# Active Setup Time (relative to SCLK)                                                           | 5          |   |     | 5         |     |     | ns   |
| tCHSL    |      | CS# Not Active Hold Time (relative to SCLK)                                                        | 5          |   |     | 5         |     |     | ns   |
| tDVCH    | tDSU | Data In Setup Time                                                                                 | 2          |   |     | 2         |     |     | ns   |
| tCHDX    | tDH  | Data In Hold Time                                                                                  | 3          |   |     | 3         |     |     | ns   |
| tCHSH    |      | CS# Active Hold Time (relative to SCLK)                                                            | 5          |   |     | 5         |     |     | ns   |
| tSHCH    |      | CS# Not Active Setup Time (relative to SCLK)                                                       | 5          |   |     | 5         |     |     | ns   |
| tSHSL    | tCSH | CS# Deselect Time From Read to next Read                                                           | 15         |   |     | 15        |     |     | ns   |
|          |      | CS# Deselect Time From Write,Erase,Program to Read Status Register                                 | 30         |   |     | 30        |     |     | ns   |
| tSHQZ(7) | tDIS | Output Disable Time                                                                                |            |   | 6   |           |     | 6   | ns   |
| tCLQV    | tV   | Clock Low to Output Valid Loading 30pF                                                             |            |   | 7   |           |     | 7   | ns   |
|          |      | Clock Low to Output Valid Loading 15pF                                                             |            |   | 6   |           |     | 6   | ns   |
| tCLQX    | tHO  | Output Hold Time                                                                                   | 0          |   |     | 0         |     |     | ns   |
| tHLCH    |      | HOLD# Active Setup Time (relative to SCLK)                                                         | 7          |   |     | 5         |     |     | ns   |
| tCHHH    |      | HOLD# Active Hold Time (relative to SCLK)                                                          | 5          |   |     | 5         |     |     | ns   |
| tHHCH    |      | HOLD# Not Active Setup Time (relative to SCLK)                                                     | 5          |   |     | 5         |     |     | ns   |
| tCHHL    |      | HOLD# Not Active Hold Time (relative to SCLK)                                                      | 5          |   |     | 5         |     |     | ns   |
| tHHQX    | tLZ  | HOLD# to Output Low-Z                                                                              |            |   | 6   |           |     | 6   | ns   |
| tHLQZ    | tHZ  | HOLD# to Output High-Z                                                                             |            |   | 6   |           |     | 6   | ns   |
| tWSL(3)  |      | Write Protect Setup Time                                                                           | 20         |   |     | 20        |     |     | ns   |
| tSHWL(3) |      | Write Protect Hold Time                                                                            | 100        |   |     | 100       |     |     | ns   |
| tDP      |      | CS# High to Deep Power-down Mode                                                                   |            |   | 3   |           |     | 3   | us   |
| tRES1    |      | CS# High To Standby Mode Without Electronic Signature Read                                         |            |   | 8   |           |     | 8   | us   |
| tRES2    |      | CS# High To Standby Mode Without Electronic Signature Read                                         |            |   | 8   |           |     | 8   | us   |
| tW       |      | Write Status Register Cycle Time                                                                   |            | 8 | 12  |           | 8   | 12  | ms   |
| tReady   |      | Reset recovery time(for erase/program operation except WRSR)                                       | 80         |   |     | 80        |     |     | us   |
|          |      | Reset recovery time(for WRSR operation)                                                            |            | 8 | 12  |           | 8   | 12  | ms   |

## 4.4.AC Characteristics for Program and Erase

Table 4-4 AC parameters for program and erase

| Sym.         | Parameter                                       | 1.65V to 3.6V |      |      | Units |
|--------------|-------------------------------------------------|---------------|------|------|-------|
|              |                                                 | Min.          | Typ. | Max. |       |
| $T_{ESL(6)}$ | Erase Suspend Latency                           |               |      | 80   | us    |
| $T_{PSL(6)}$ | Program Suspend Latency                         |               |      | 80   | us    |
| $T_{PRS(4)}$ | Latency between Program Resume and next Suspend | 0.3           |      |      | us    |
| $T_{ERS(5)}$ | Latency between Erase Resume and next Suspend   | 0.3           |      |      | us    |
| $t_{PP}$     | Page program time (up to 256 bytes)             |               | 1.3  | 3    | ms    |
| $t_{PE}$     | Page erase time                                 |               | 10   | 12   | ms    |
| $t_{SE}$     | Sector erase time                               |               | 10   | 12   | ms    |
| $t_{BE1}$    | Block erase time for 32K bytes                  |               | 10   | 12   | ms    |
| $t_{BE2}$    | Block erase time for 64K bytes                  |               | 10   | 12   | ms    |
| $t_{CE}$     | Chip erase time                                 |               | 10   | 12   | ms    |

### Note

1.  $t_{CH} + t_{CL}$  must be greater than or equal to  $1/\text{Frequency}$ .
2. Typical values given for  $T_A=25^\circ\text{C}$ . Not 100% tested.
3. Only applicable as a constraint for a WRSR instruction.
4. Program operation may be interrupted as often as system request. The minimum timing of  $t_{PRS}$  must be observed before issuing the next program suspend command. However, in order for an Program operation to make progress,  $t_{PRS} \geq 100\text{us}$  must be included in resume-to-suspend loop(s). Not 100% tested.
5. Erase operation may be interrupted as often as system request. The minimum timing of  $t_{ERS}$  must be observed before issuing the next erase suspend command. However, in order for an Erase operation to make progress,  $t_{ERS} \geq 200\text{us}$  must be included in resume-to-suspend loop(s). Notes. Not 100% tested.
6. Latency time is required to complete Erase/Program Suspend operation.
7. The value guaranteed by characterization, not 100% tested in production.

Figure 4-4 Serial Input Timing

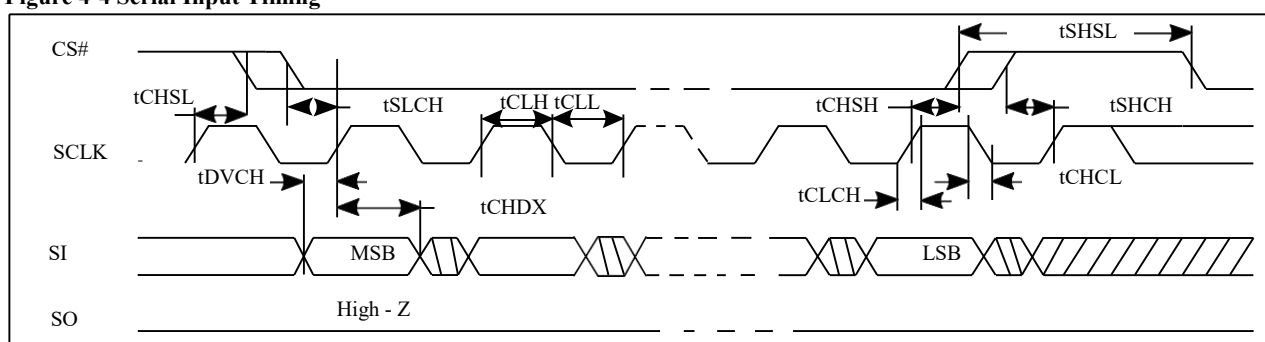


Figure 4-5 Output Timing

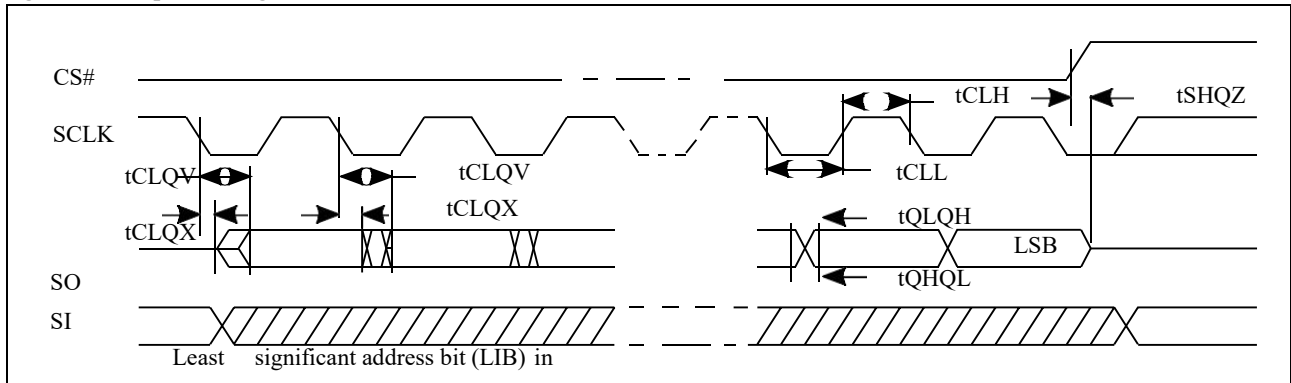


Figure 4-6 Hold Timing


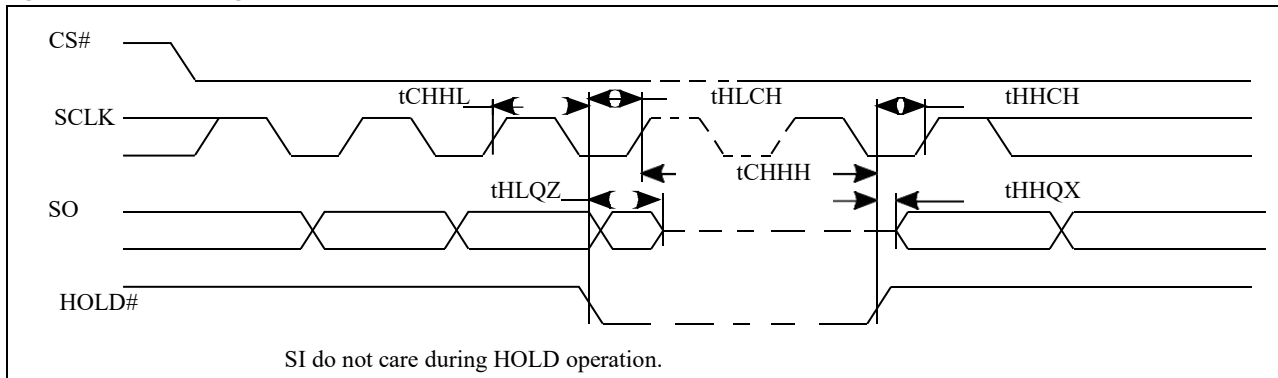


Figure 4-7 WP Timing

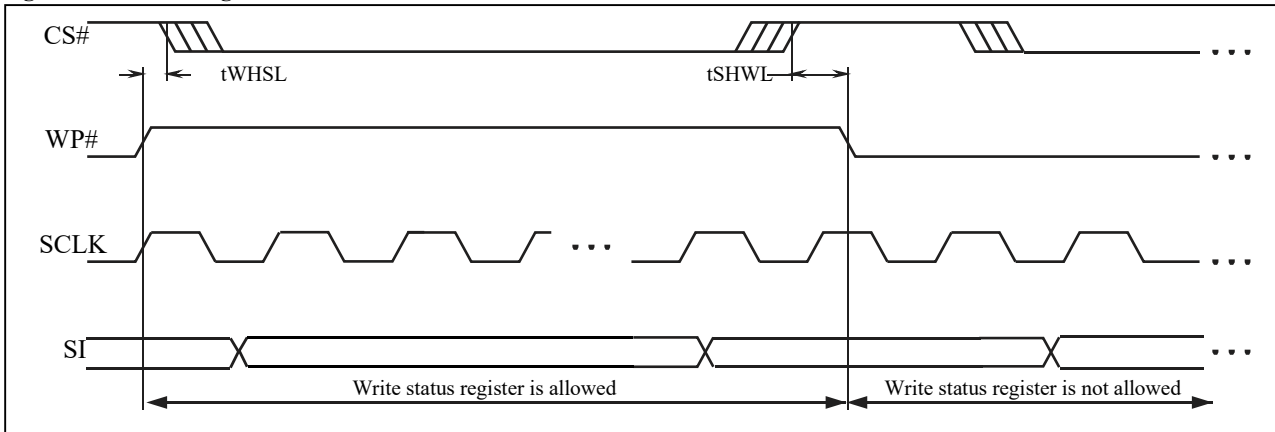

## 4.5. Operation Conditions

### At Device Power-Up and Power-Down

AC timing illustrated in "Figure AC Timing at Device Power-Up" and "Figure Power-Down Sequence" are for the supply voltages and the control signals at device power-up and power-down. If the timing in the figures is ignored, the device will not operate correctly.

During power-up and power-down, CS# needs to follow the voltage applied on VCC to keep the device not to be selected. The CS# can be driven low when VCC reach  $V_{CC(min)}$  and wait a period of  $t_{VSL}$ .

Figure 4-8 AC Timing at Device Power-Up


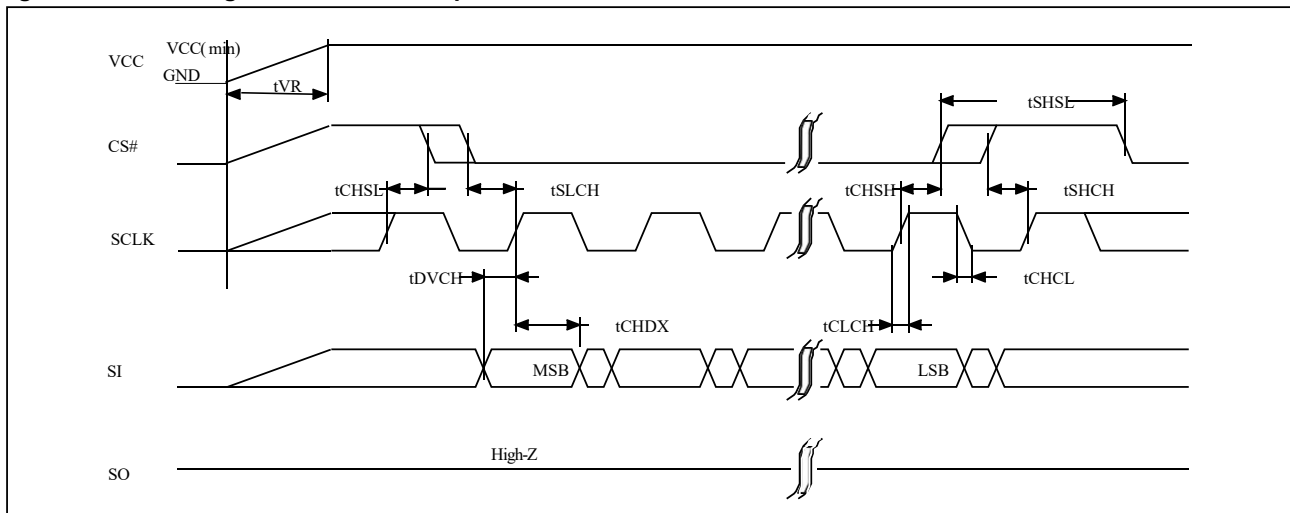



Figure 4-9 Power-Up Timing

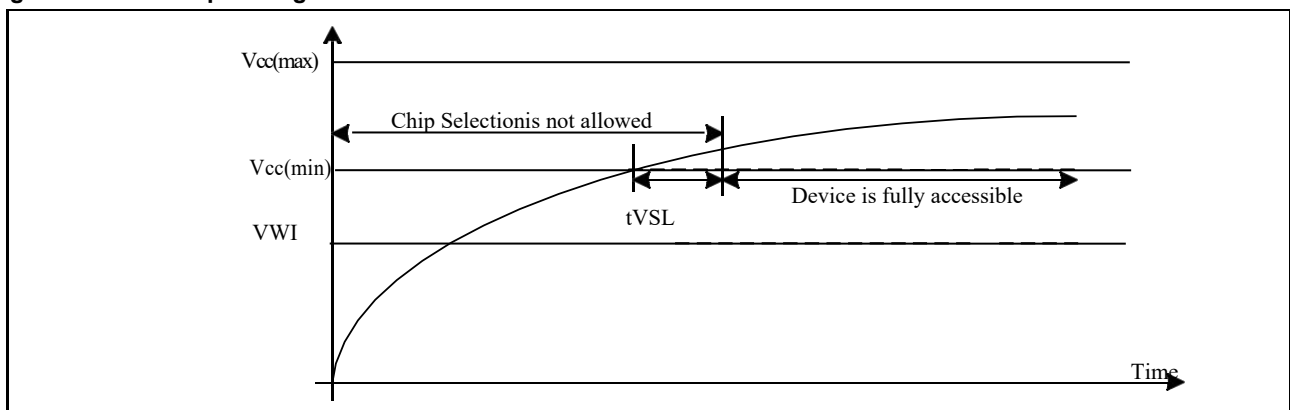

### Power Up/Down and Voltage Drop

For Power-down to Power-up operation, the VCC of flash device must below VPWD for at least tPWD timing. Please check the table below for more detail.

**Figure 4-10 Power down-up Timing**

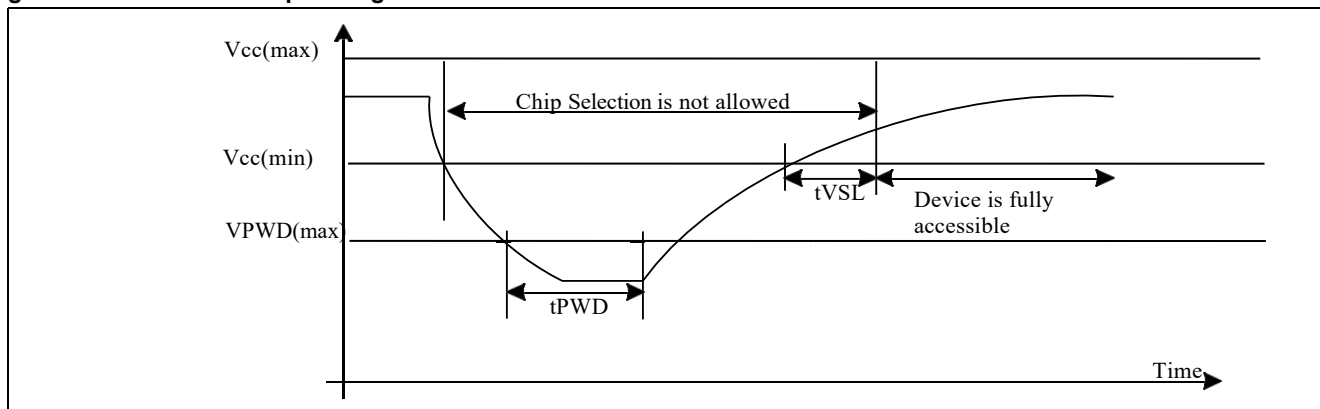

| Symbol | Parameter                                                               | min  | max    | unit |
|--------|-------------------------------------------------------------------------|------|--------|------|
| VPWD   | VCC voltage needed to below VPWD for ensuring initialization will occur |      | 1      | V    |
| tPWD   | The minimum duration for ensuring initialization will occur             | 300  |        | us   |
| tVSL   | VCC(min.) to device operation                                           | 70   |        | us   |
| tVR    | VCC Rise Time                                                           | 1    | 500000 | us/V |
| VWI    | Write Inhibit Voltage                                                   | 1.45 | 1.55   | V    |

## 5. Commands

### 5.1. Commands listing

Figure 5-1 Command set

| Commands                   | Abbr.   | Code | ADR Bytes | DMY Bytes | Data Bytes | Function description                      |
|----------------------------|---------|------|-----------|-----------|------------|-------------------------------------------|
| <b>Read</b>                |         |      |           |           |            |                                           |
| Read Array (fast)          | FREAD   | 0Bh  | 3         | 1         | 1+         | n bytes read out until CS# goes high      |
| Read Array (low power)     | READ    | 03h  | 3         | 0         | 1+         | n bytes read out until CS# goes high      |
| Read Dual Output           | DREAD   | 3Bh  | 3         | 1         | 1+         | n bytes read out by Dual output           |
| Read 2x I/O                | 2READ   | BBh  | 3         | 1         | 1+         | n bytes read out by 2 x I/O               |
| Read Quad Output           | QREAD   | 6Bh  | 3         | 1         | 1+         | n bytes read out by Quad output           |
| Read 4x I/O                | 4READ   | EBh  | 3         | 1         | 1+         | n bytes read out by 4 x I/O               |
| <b>Program and Erase</b>   |         |      |           |           |            |                                           |
| Page Erase                 | PE      | 81h  | 3         | 0         | 0          | erase selected page                       |
| Sector Erase (4K bytes)    | SE      | 20h  | 3         | 0         | 0          | erase selected sector                     |
| Block Erase (32K bytes)    | BE32    | 52h  | 3         | 0         | 0          | erase selected 32K block                  |
| Block Erase (64K bytes)    | BE64    | D8h  | 3         | 0         | 0          | erase selected 64K block                  |
| Chip Erase                 | CE      | 60h  | 0         | 0         | 0          | erase whole chip                          |
|                            |         | C7h  | 0         | 0         | 0          | erase whole chip                          |
| Page Program               | PP      | 02h  | 3         | 0         | 1+         | program selected page                     |
| Dual-IN Page Program       | 2PP     | A2h  | 3         | 0         | 1+         | program selected page by Dual input       |
| Quad page program          | QPP     | 32h  | 3         | 0         | 1+         | quad input to program selected page       |
| Program/Erase Suspend      | PE<br>S | 75h  | 0         | 0         | 0          | suspend program/erase operation           |
|                            |         | B0h  | 0         | 0         | 0          | suspend program/erase operation           |
| Program/Erase Resume       | PER     | 7Ah  | 0         | 0         | 0          | continue program/erase operation          |
|                            |         | 30h  | 0         | 0         | 0          | continue program/erase operation          |
| <b>Protection</b>          |         |      |           |           |            |                                           |
| Write Enable               | WREN    | 06h  | 0         | 0         | 0          | sets the (WEL) write enable latch bit     |
| Write Disable              | WRDI    | 04h  | 0         | 0         | 0          | resets the (WEL) write enable latch bit   |
| Volatile SR Write Enable   | VWREN   | 50h  | 0         | 0         | 0          | Write enable for volatile status register |
| <b>Security</b>            |         |      |           |           |            |                                           |
| Erase Security Registers   | ERSCUR  | 44h  | 3         | 0         | 0          | Erase security registers                  |
| Program Security Registers | PRSCUR  | 42h  | 3         | 0         | 1+         | Program security registers                |
| Read Security Registers    | RDSCUR  | 48h  | 3         | 1         | 1+         | Read value of security register           |
| <b>Status Register</b>     |         |      |           |           |            |                                           |
| Read Status Register       | RDSR    | 05h  | 0         | 0         | 1          | read out status register                  |
|                            | RDSR2   | 35h  | 0         | 0         | 1          | Read out status register-1                |
| Read Configure Register    | RDCR    | 15h  | 0         | 0         | 1          | read out configureregister                |
| Active Status Interrupt    | ASI     | 25h  | 0         | 1         | 0          | Enable the active status interrupt        |

**Command set (Cont'd)**

| Commands                                   | Abbr.    | Code | ADR Bytes | DMY Bytes | Data Bytes | Function                                                   |
|--------------------------------------------|----------|------|-----------|-----------|------------|------------------------------------------------------------|
| <b>Other Commands</b>                      |          |      |           |           |            |                                                            |
| Write Status Register                      | WRSR     | 01h  | 0         | 0         | 2          | Write data to status registers                             |
| Write Configure Register                   | WRCR     | 31h  | 0         | 0         | 1          | Write data to configuration registers                      |
| Reset Enable                               | RSTEN    | 66h  | 0         | 0         | 0          | Enable reset                                               |
| Reset                                      | RST      | 99h  | 0         | 0         | 0          | Reset                                                      |
| Read Manufacturer/device ID                | RDID     | 9Fh  | 0         | 0         | 1 to 3     | output JEDEC ID: 1-byte manufacturer ID & 2-byte device ID |
| Read Manufacture ID                        | REMS     | 90h  | 3         |           | 1+         | Read manufacturer ID/device ID data                        |
| Dual Read Manufacture ID                   | DREMS    | 92h  | 3         | 1         | 1+         | Dual output read manufacture/device ID                     |
| Quad Read Manufacture ID                   | QREMS    | 94h  | 3         | 1         | 1+         | Quad output read manufacture/device ID                     |
| Deep Power-down                            | DP       | B9h  | 0         | 0         | 0          | enters deep power-down mode                                |
| Release Deep Power-down/Read Electronic ID | RDP/RE S | ABh  | 3         | 0         | 1          | Read electronic ID data                                    |
| Set burst length                           | SBL      | 77h  | 0         | 0         | 0          | Set burst length                                           |
| Read SFDP                                  | RDSFDP   | 5Ah  |           |           |            | Read SFDP parameter                                        |
| Release read enhanced                      |          | FFh  |           |           |            | Release from read enhanced                                 |
| Read unique ID                             | RUID     | 4Bh  |           | 4         | 1+         | Read unique ID                                             |

**NOTE:****1. Dual Output data**

IO0 = (D6, D4, D2, D0)

IO1 = (D7, D5, D3, D1)

**2. Dual Input Address**

IO0 = A22, A20, A18, A16, A14, A12, A10, A8 A6, A4, A2, A0, M6, M4, M2, M0 IO1

= A23, A21, A19, A17, A15, A13, A11, A9 A7, A5, A3, A1, M7, M5, M3, M1

**3. Quad Output Data**

IO0 = (D4, D0, .....)

IO1 = (D5, D1, .....)

IO2 = (D6, D2, .....)

IO3 = (D7, D3,.....)

**4. Quad Input Address**

IO0 = A20, A16, A12, A8, A4, A0, M4, M0

IO1 = A21, A17, A13, A9, A5, A1, M5, M1

IO2 = A22, A18, A14, A10, A6, A2, M6, M2

IO3 = A23, A19, A15, A11, A7, A3, M7, M3

**5. Fast Read Quad I/O Data**

IO0 = (x, x, x, x, D4, D0,...)

IO1 = (x, x, x, x, D5, D1,...)

IO2 = (x, x, x, x, D6, D2,...)

IO3 = (x, x, x, x, D7, D3,...)

#### 6. Security Registers Address:

Security Register1: A23-A16=00H, A15-A9=0001000, A8-A0= Byte Address;

Security Register2: A23-A16=00H, A15-A9=0010000, A8-A0= Byte Address;


Security Register3: A23-A16=00H, A15-A9=0011000, A8-A0= Byte Address;

## 5.2. Write Enable (WREN)

The Write Enable (WREN) instruction is for setting Write Enable Latch (WEL) bit. For those instructions like PP,DPP,QPP, PE,SE, BE32K,BE, CE, and WRSR,ERSCUR, PRSCUR which are intended to change the device content, should be set every time after the WREN instruction setting the WEL bit.

The sequence of issuing WREN instruction is: CS# goes low→ sending WREN instruction code→ CS# goes high.

**Figure 5-2 Write Enable (WREN) Sequence (Command 06)**

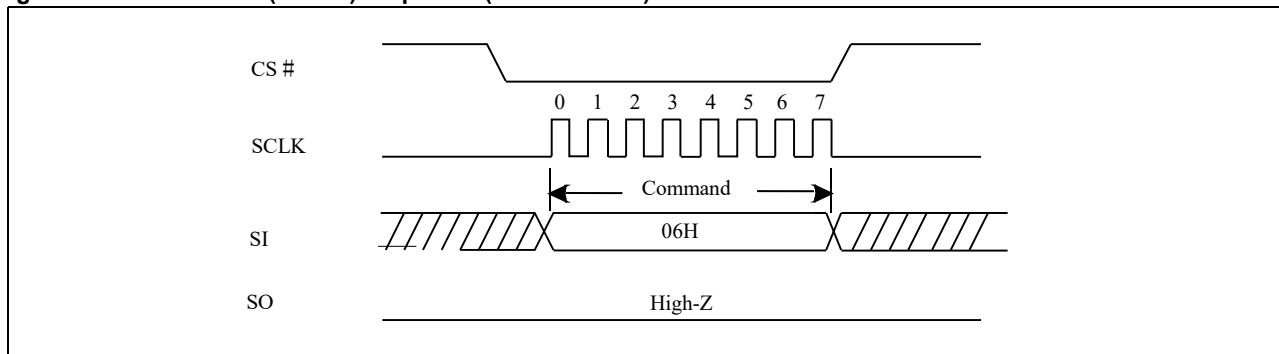


## 5.3. Write Disable (WRDI)

The Write Disable (WRDI) instruction is for resetting Write Enable Latch (WEL) bit.

The sequence of issuing WRDI instruction is: CS# goes low→ sending WRDI instruction code→ CS# goes high.

The WEL bit is reset by following situations:


- Power-up
- Write Disable (WRDI) instruction completion
- Write Status Register (WRSR) instruction completion
- Page Program (PP) instruction completion
- Dual Input Page Program (DPP) instruction completion
- Quad Page Program (QPP) instruction completion
- Page Erase (PE) instruction completion
- Sector Erase (SE) instruction completion
- Block Erase (BE32K,BE) instruction completion
- Chip Erase (CE) instruction completion
- Erase Security Register (ERSCUR) instruction completion
- Program Security Register (PRSCUR) instruction completion
- Reset (RST) instruction completion

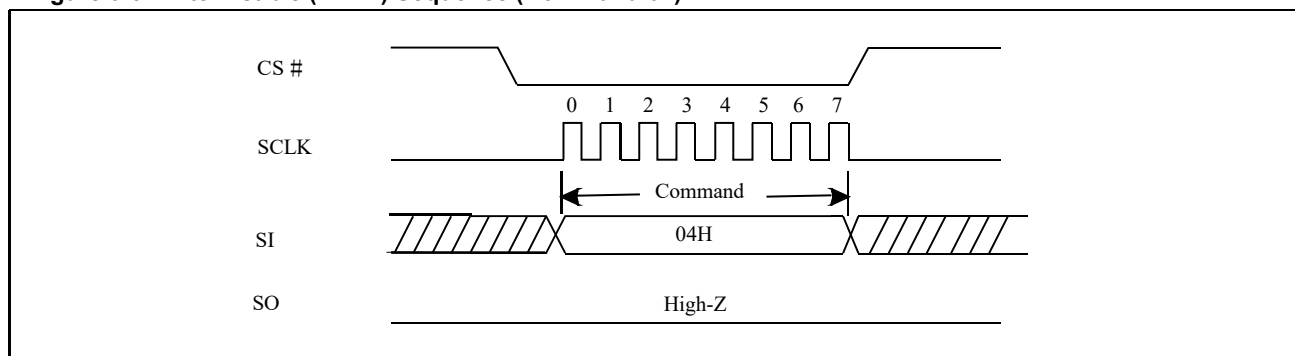**Figure 5-3 Write Disable (WRDI) Sequence (Command 04)**

#### 5.4. Write Enable for Volatile Status Register

The non-volatile Status Register bits can also be written to as volatile bits. This gives more flexibility to change the system configuration and memory protection schemes quickly without waiting for the typical non-volatile bit write cycles or affecting the endurance of the Status Register non-volatile bits. The Write Enable for Volatile Status Register command must be issued prior to a Write Status Register command. The Write Enable for Volatile Status Register command will not set the Write Enable Latch bit, it is only valid for the Write Status Register command to change the volatile Status Register bit values.

The sequence of issuing Write Enable for Volatile Status Register instruction is: CS# goes low → sending Write Enable for Volatile Status Register instruction code → CS# goes high.

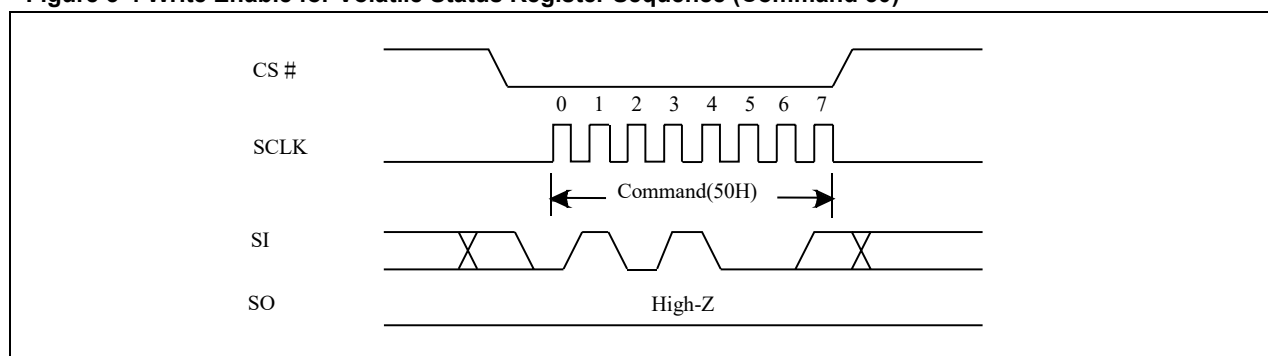**Figure 5-4 Write Enable for Volatile Status Register Sequence (Command 50)**


### 5.5. Read Status Register (RDSR)

The RDSR instruction is for reading Status Register Bits. The Read Status Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress. For command code "05H", the SO will output Status Register bits S7~S0. The command code "35H", the SO will output Status Register bits S15~S8.

The sequence of issuing RDSR instruction is: CS# goes low → sending RDSR instruction code → Status Register data out on SO.

The SIO[3:1] are "don't care".

**Figure 5-5 Read Status Register (RDSR) Sequence (Command 05 or 35)**

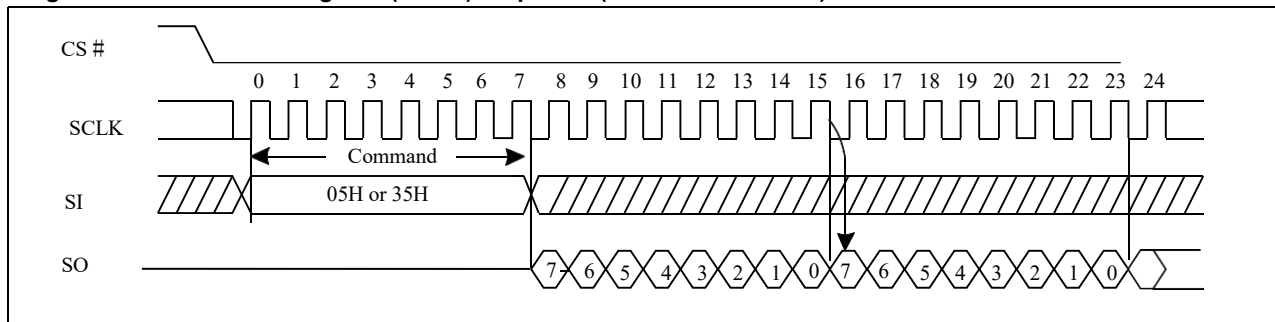


### 5.6. Read Configure Register (RDCR)

The RDCR instruction is for reading Configure Register Bits. The Read Configure Register can be read at any time (even in program/erase/write status register condition). It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress.

The sequence of issuing RDCR instruction is: CS# goes low → sending RDCR instruction code → Configure Register data out on SO.

The SIO[3:1] are "don't care".

**Figure 5-6 Read Configure Register (RDCR) Sequence (Command 15)**

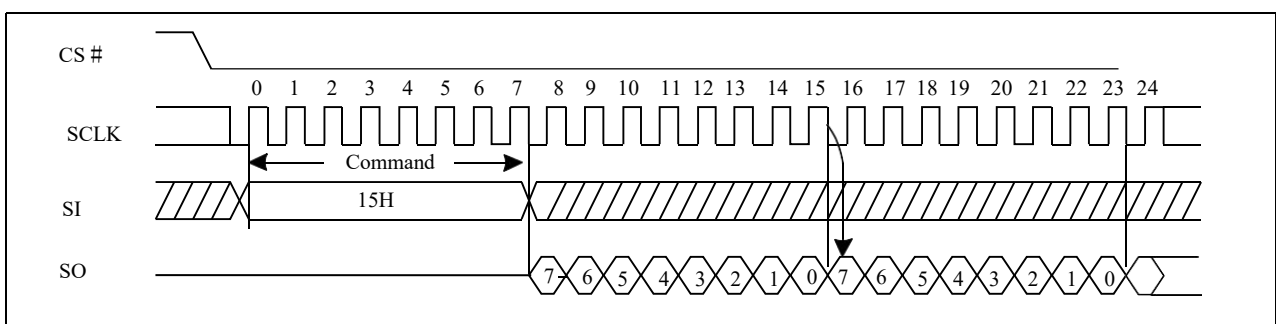

## 5.7. Active Status Interrupt (ASI)

To simplify the readout of the WIP bit, the Active Status Interrupt command (25h) may be used. It is then not necessary to continuously read the status register, it is sufficient to monitor the value of the SO line. If the SO line is connected to an interrupt line on the host controller, the host controller may be in sleep mode until the SO line indicates that the device is ready for the next command.


The WIP bit can be read at any time, including during an internally self-timed program or erase operation. To enable the Active Status Interrupt command, the CS pin must first be asserted and the opcode of 25h must be clocked into the device. For SPI Mode0 and Mode3, at least one dummy bit has to be clocked into the device after the last bit of the opcode has been clocked in. (In most cases, this is most easily done by sending a dummy byte to the device.) The value of the SI line after the opcode is clocked in is of no significance to the operation.

The value of WIP is then output on the SO line, and is continuously updated by the device for as long as the CS pin remains asserted. Additional clocks on the SCLK pin are not required. For SPI Mode3, SCLK must keep low. If the WIP bit changes from 1 to 0 while the CS pin is asserted, the SO line will change from 1 to 0. (The WIP bit cannot change from 0 to 1 during an operation, so if the SO line already is 0, it will not change.)

Deasserting the CS pin will terminate the Active Status Interrupt operation and put the SO pin into a high-impedance state. The CS pin can be deasserted at any time and does not require that a full byte of data be read.

The sequence of issuing ASI instruction is: CS# goes low→ sending ASI instruction code→ WIP data out on SO.

**Figure 5-7 Active Status Interrupt (ASI) Sequence (Command 25)**

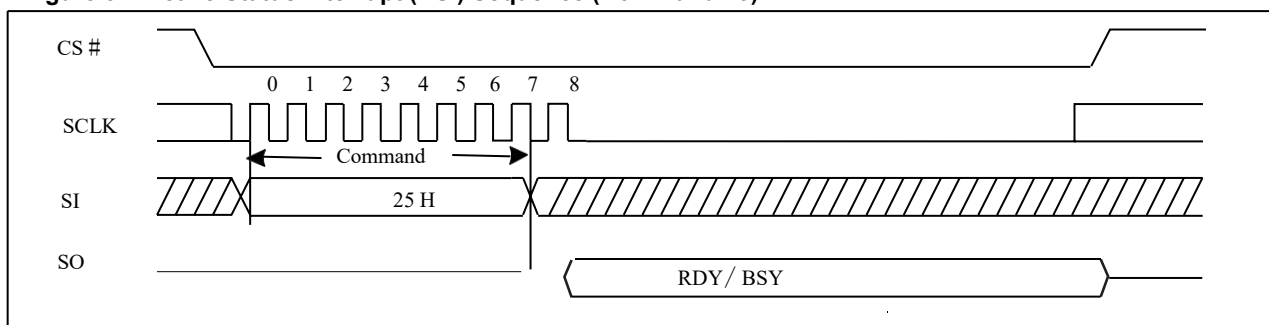

## 5.8. Write Status Register (WRSR)

The Write Status Register (WRSR) command allows new values to be written to the Status Register. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The Write Status Register (WRSR) command has no effect on S15, S10, S1 and S0 of the Status Register. CS# must be driven high after the eighth or sixteen bit of the data byte has been latched in. If not, the Write Status Register (WRSR) command is not executed. If CS# is driven high after eighth bit of the data byte, the CMP and QE and SRP1 bits will not change. As soon as CS# is driven high, the self-timed Write Status Register cycle (whose duration is  $t_W$ ) is initiated. While the Write Status Register cycle is in progress, the Status Register may still be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Write Status Register cycle, and is 0 when it is completed. When the cycle is


completed, the Write Enable Latch (WEL) is reset.

The Write Status Register (WRSR) command allows the user to change the values of the Block Protect (BP4, BP3, BP2, BP1, and BP0) bits, to define the size of the area that is to be treated as read-only, as defined in Table1. The Write Status Register (WRSR) command also allows the user to set or reset the Status Register Protect (SRP1 and SRP0) bits in accordance with the Write Protect (WP#) signal. The Status Register Protect (SRP1 and SRP0) bits and Write Protect (WP#) signal allow the device to be put in the Hardware Protected Mode. The Write Status Register (WRSR) command is not executed once the Hardware Protected Mode is entered.

The sequence of issuing WRSR instruction is: CS# goes low→ sending WRSR instruction code→ Status Register data on SI→CS# goes high.

The CS# must go high exactly at the 8 bits or 16 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Status Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

**Figure 5-8 Write Status Register (WRSR) Sequence (Command 01)**

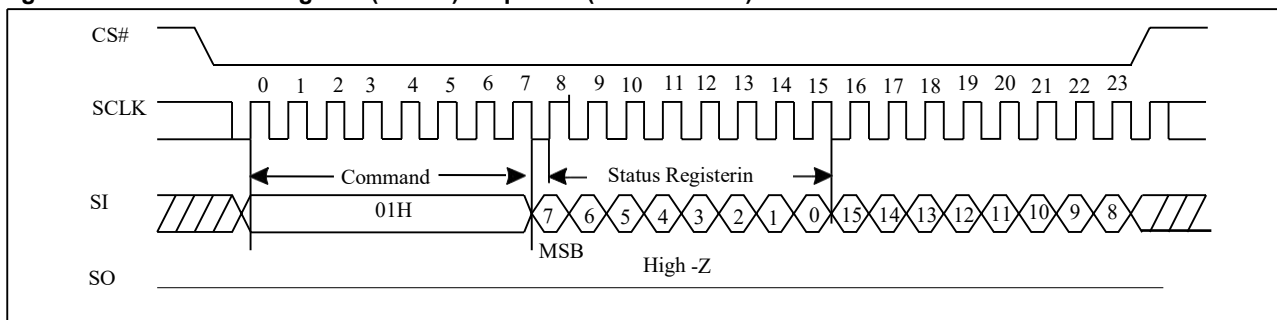


## 5.9. Write Configure Register (WRCR)

The Write Configure Register (WRCR) command allows new values to be written to the Configure Register. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The sequence of issuing WRCR instruction is: CS# goes low→ sending WRCR instruction code→ Configure Register data on SI→CS# goes high.

The CS# must go high exactly at the 8 bits data boundary; otherwise, the instruction will be rejected and not executed. The self-timed Write Status Register cycle time (tW) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Write Status Register cycle is in progress. The WIP sets 1 during the tW timing, and sets 0 when Write Configure Register Cycle is completed, and the Write Enable Latch (WEL) bit is reset.

**Figure 5-9 Write Configure Register (WRCR) Sequence (Command 01)**

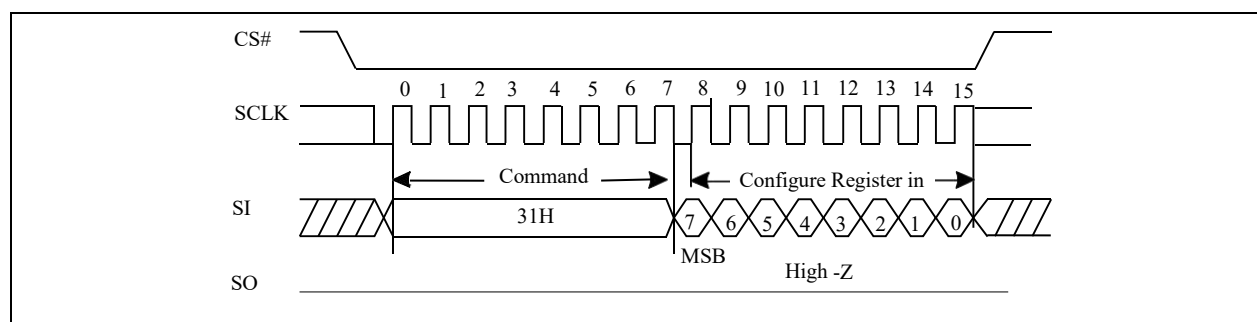


## 5.10. Read Data Bytes (READ)

The read instruction is for reading data out. The address is latched on rising edge of SCLK, and data shifts out on the falling edge of SCLK at a maximum frequency  $f_R$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing READ instruction is: CS# goes low → sending READ instruction code → 3-byte address on SI → data out on SO → to end READ operation can use CS# to high at any time during data out.

**Figure 5-10 Read Data Bytes (READ) Sequence (Command 03)**

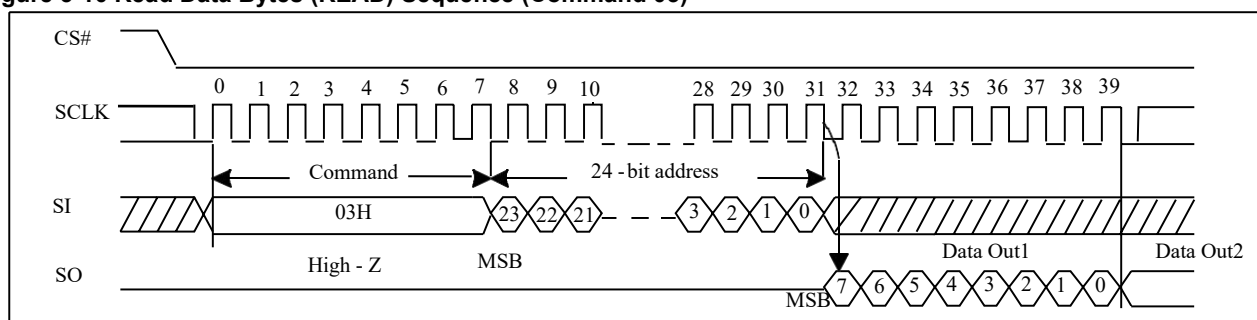


## 5.11. Read Data Bytes at Higher Speed (FAST\_READ)

The FAST\_READ instruction is for quickly reading data out. The address is latched on rising edge of SCLK, and data of each bit shifts out on the falling edge of SCLK at a maximum frequency  $f_C$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FAST\_READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing FAST\_READ instruction is: CS# goes low → sending FAST\_READ instruction code → 3-byte address on SI → 1-dummy byte address on SI → data out on SO → to end FAST\_READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, FAST\_READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 5-11 Read at Higher Speed (FAST\_READ) Sequence (Command 0B)**

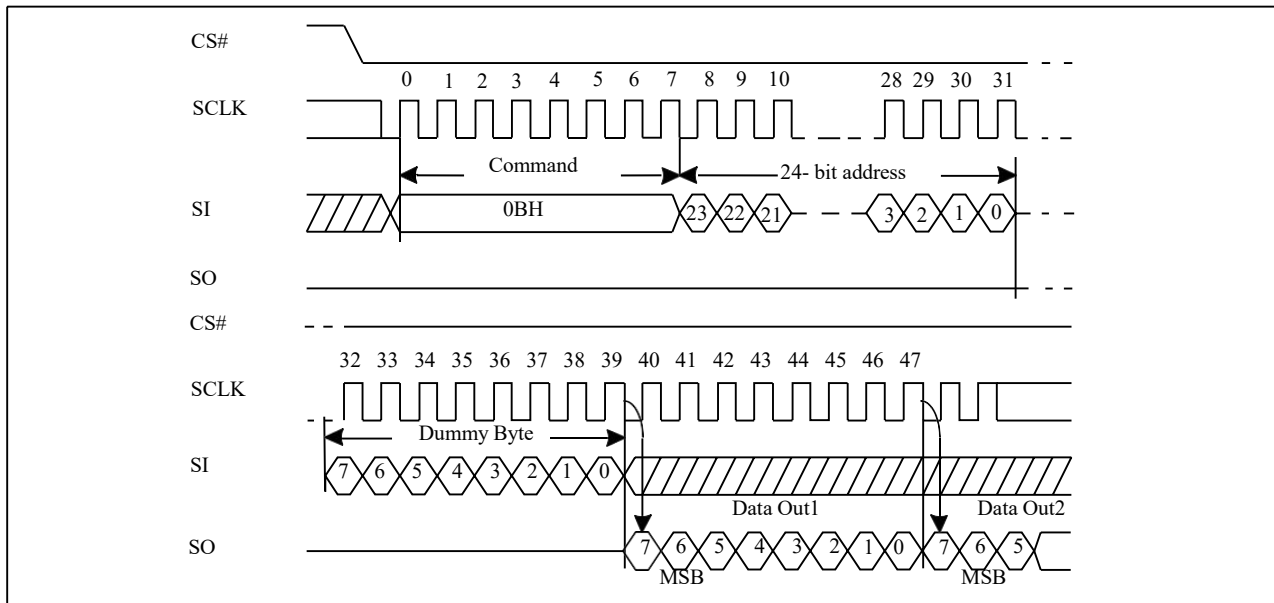


## 5.12. Dual Read Mode (DREAD)

The DREAD instruction enable double throughput of Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency  $f_T$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single DREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing DREAD instruction, the following data out will perform as 2-bit instead of previous 1-bit.

The sequence of issuing DREAD instruction is: CS# goes low → sending DREAD instruction → 3-byte address on SI → 8-bit dummy cycle → data out interleave on SIO1 & SIO0 → to end DREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, DREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 5-12 Dual Read Mode Sequence (Command 3B)**

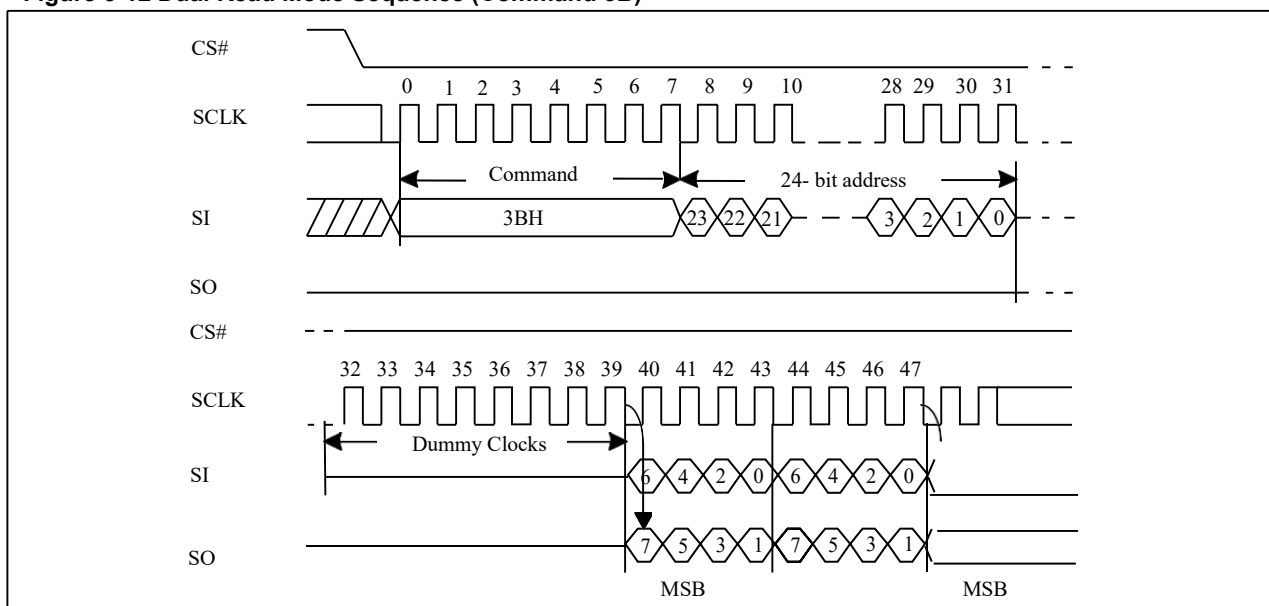

### 5.13.2 X IO Read Mode(2READ)


The 2READ instruction enables Double Transfer Rate of Serial NOR Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maximum frequency  $f_T$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 2READ instruction. The address counter rolls over to 0 when the highest address has been reached.

Once writing 2READ instruction, the following address/dummy/data out will perform as 2-bit instead of previous 1-bit.

The sequence of issuing 2READ instruction is: CS# goes low → sending 2READ instruction → 24-bit address interleave on SIO1 & SIO0 → 8-bit dummy cycle on SIO1 & SIO0 → data out interleave on SIO1 & SIO0 → to end 2READ operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, 2READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 5-13 2 X IO Read Mode Sequence (Command BB M5-4 ≠ (1,0))**

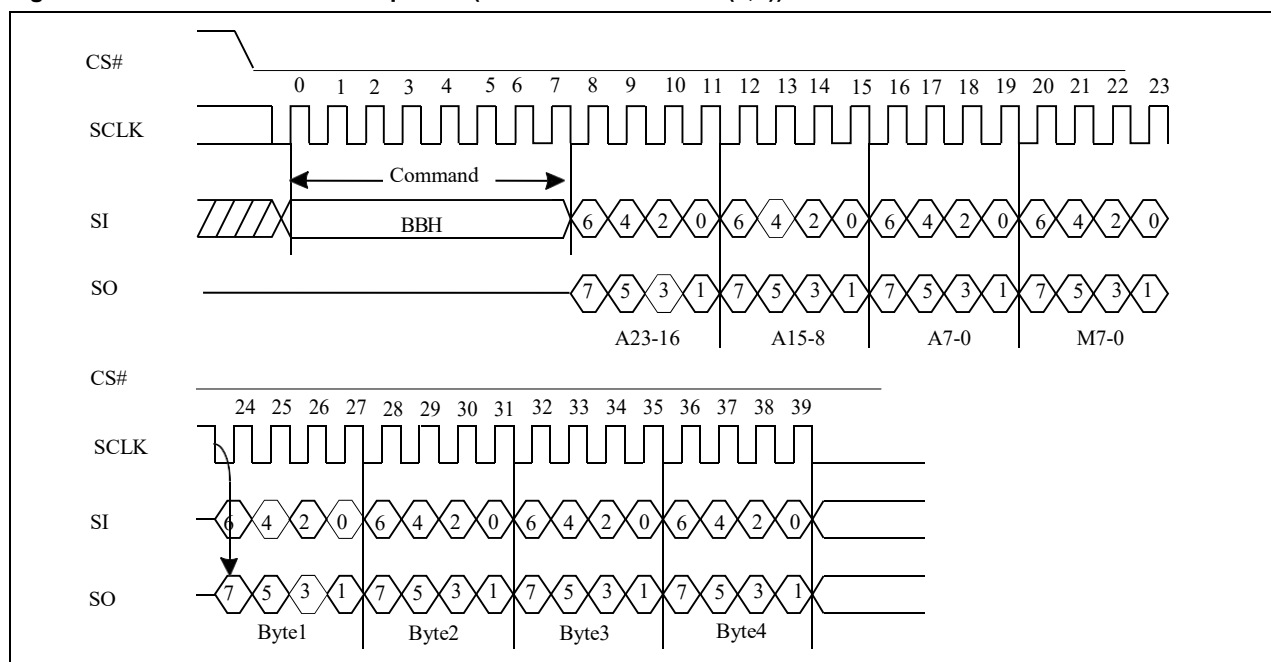


### 5.14. 2 X IO Read Performer Enhance Mode

“BBh” command supports 2 X IO Performance Enhance Mode which can further reduce command overhead through setting the “Continuous Read Mode” bits (M7-0) after the input 3-byte address (A23-A0). If the “Continuous Read Mode” bits (M5-4) = (1, 0), then the next 2 X IO Read command (after CS# is raised and then lowered) does not require the BBH command code.

If the “Continuous Read Mode” bits (M5-4) do not equal (1, 0), the next command requires the first BBH command code, thus returning to normal operation. A “Continuous Read Mode” Reset command can be used to reset (M5-4) before issuing normal command.

**Figure 5-14 2 X IO Read Performance Enhance Mode ( M5-4 = (1,0) )**

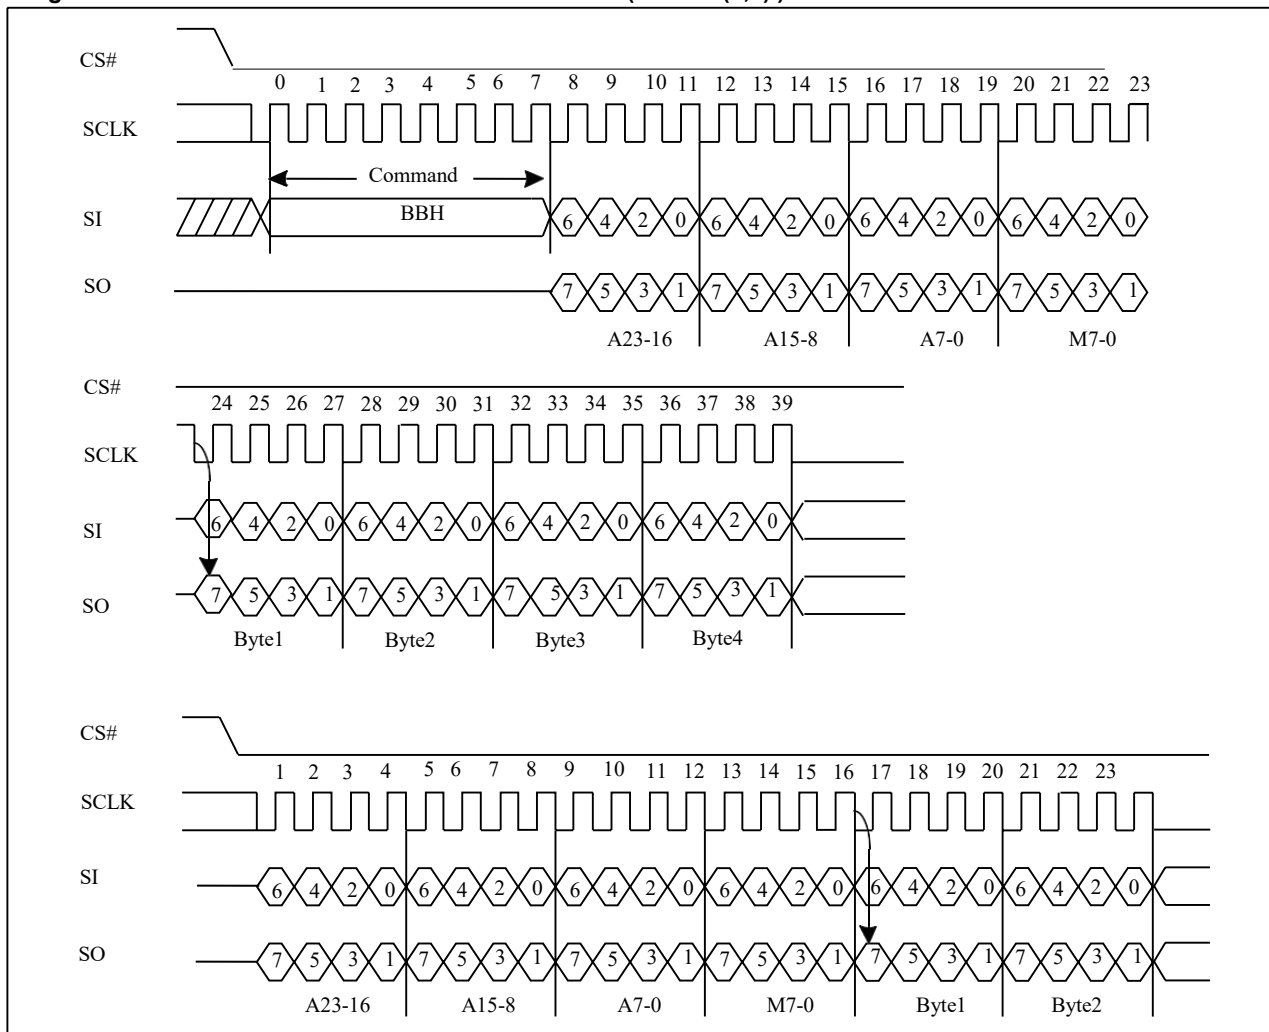

Note: 2 X IO Read Performance Enhance Mode, if M5-4 = 1, 0. If not using performance enhance recommend to set M5-4  $\neq$  1, 0.


### 5.15. Quad Read Mode (QREAD)

The QREAD instruction enable quad throughput of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the QREAD instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency  $f_Q$ . The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single QREAD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing QREAD instruction, the following data out will perform as 4-bit instead of previous 1-bit.

The sequence of issuing QREAD instruction is: CS# goes low → sending QREAD instruction → 3-byte address on SI → 8-bit dummy cycle → data out interleave on SIO3, SIO2, SIO1 & SIO0 → to end QREAD operation can use CS# to high at any time during data out.

While Program/Erase/Write Status Register cycle is in progress, QREAD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 5-15 Quad Read Mode Sequence (Command 6B)**

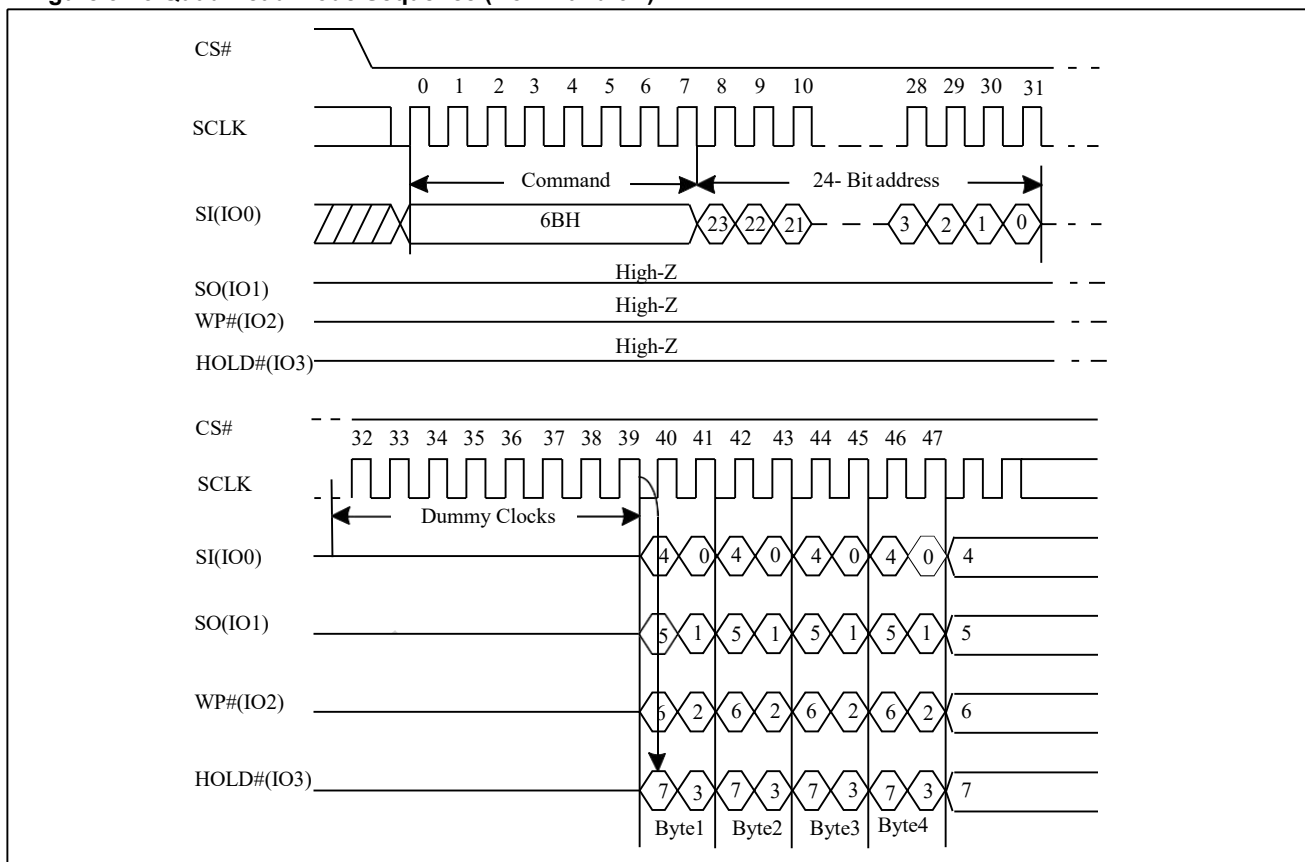

### 5.16.4 X IO Read Mode(4READ)

The 4READ instruction enable quad throughput of Serial NOR Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4READ instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4READ instruction, the following address/dummy/data out will perform as 4-bit instead of previous 1-bit.


The sequence of issuing 4READ instruction is: CS# goes low → sending 4READ instruction → 24-bit address interleave on SIO3, SIO2, SIO1 & SIO0 → 2+4 dummy cycles → data out interleave on SIO3, SIO2, SIO1 & SIO0 → to end 4READ operation can use CS# to high at any time during data out.

Another sequence of issuing 4READ instruction especially useful in random access is: CS# goes low → sending 4READ instruction → 3-bytes address interleave on SIO3, SIO2, SIO1 & SIO0 → "Continuous Read Mode" byte M[7:0] → 4 dummy cycles → data out still CS# goes high → CS# goes low (reduce 4 Read instruction) → 24-bit random access address.

In the performance-enhancing mode, the "Continuous Read Mode" bits M[5:4] = (1,0) can make this mode continue and reduce the next 4READ instruction. Once M[5:4] ≠ (1,0) and afterwards CS# is raised and then lowered, the system then will escape from performance enhance mode and return to normal operation. A "Continuous Read Mode" Reset command can be used to reset (M5-4) before issuing normal command

While Program/Erase/Write Status Register cycle is in progress, 4READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

**Figure 5-16 4 X IO Read Mode Sequence (Command EB M5-4 ≠ (1,0))**

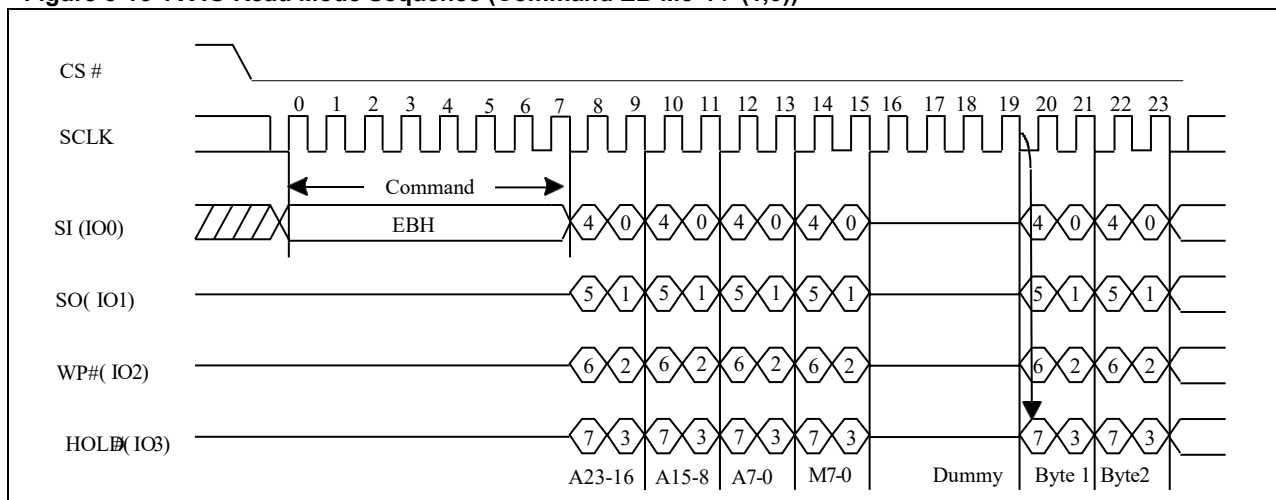

Note:


1. Hi-impedance is inhibited for the two clock cycles.
2. M[5:4] = (1,0) is inhibited.

### 5.17.4 X IO Read Performance Enhance

“EBh” command supports 4 X IO Performance Enhance Mode which can further reduce command overhead through setting the “Continuous Read Mode” bits (M7-0) after the input 3-byte address (A23-A0). If the “Continuous Read Mode” bits (M5-4) = (1, 0), then the next 4 X IO Read command (after CS# is raised and then lowered) does not require the EBH command code.

If the “Continuous Read Mode” bits (M5-4) do not equal (1, 0), the next command requires the first EBH command code, thus returning to normal operation. A “Continuous Read Mode” Reset command can be used to reset (M5-4) before issuing normal command.

**Figure 5-17 4 x I/O Read Performance Enhance Mode Sequence ( M5-4 = (1,0) )**

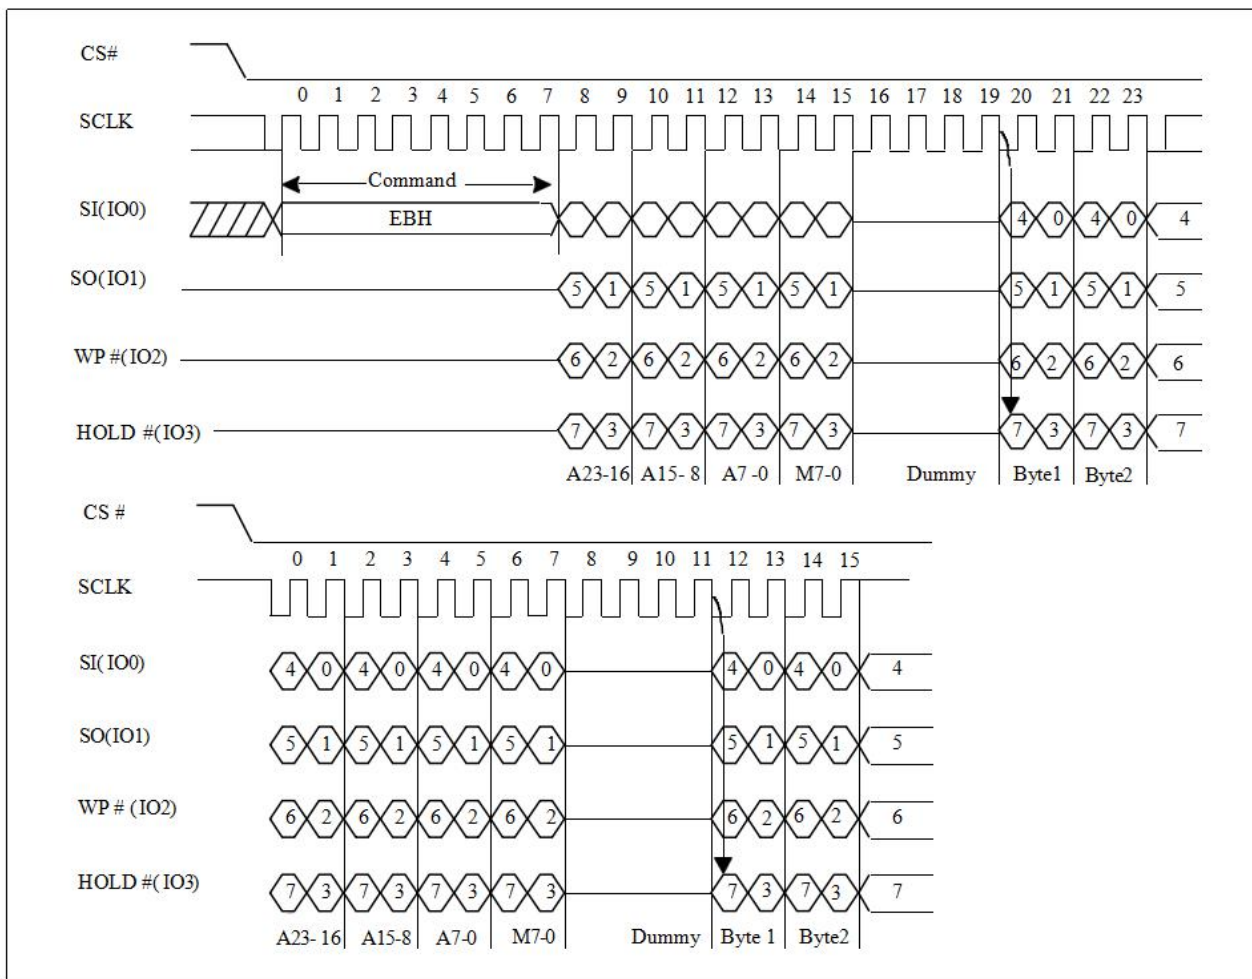

Note: 1. 4 X IO Read Performance Enhance Mode, if M5-4 = 1, 0. If not using performance enhance

### 5.18. Burst Read


The Set Burst with Wrap command is used in conjunction with “4 X IO Read” command to access a fixed length of 8/16/32/64-byte section within a 256-byte page, in standard SPI mode.

The Set Burst with Wrap command sequence: CS# goes low → Send Set Burst with Wrap command → Send 24 dummy bits → Send 8 bits “Wrap bits” → CS# goes high.

| W6,W5 | W4=0       |             | W4=1 (default) |             |
|-------|------------|-------------|----------------|-------------|
|       | Wrap Aroud | Wrap Length | Wrap Aroud     | Wrap Length |
| 0,0   | Yes        | 8-byte      | No             | N/A         |
| 0,1   | Yes        | 16-byte     | No             | N/A         |
| 1,0   | Yes        | 32-byte     | No             | N/A         |
| 1,1   | Yes        | 64-byte     | No             | N/A         |

If the W6-W4 bits are set by the Set Burst with Wrap command, all the following “4 X IO Read” command will use the W6-W4 setting to access the 8/16/32/64-byte section within any page. To exit the “Wrap Around” function and return to normal read operation, another Set Burst with Wrap command should be issued to set W4=1.

**Figure 5-18 Burst Read (SBL) Sequence (Command 77)**

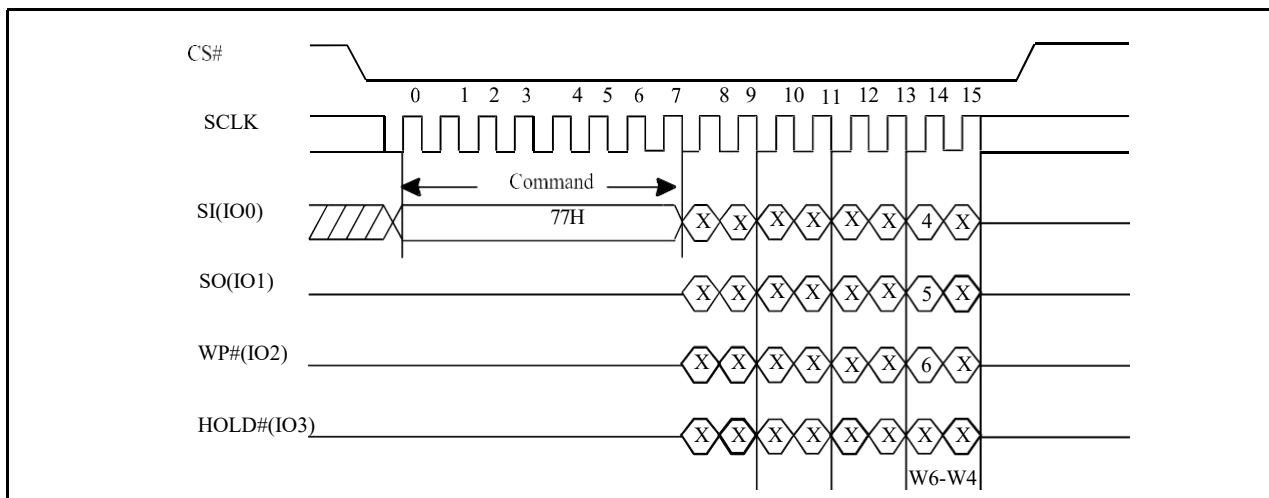


### 5.19. Page Erase (PE)

The Page Erase (PE) instruction is for erasing the data of the chosen Page to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Page Erase (PE).

To perform a Page Erase with the standard page size (256 bytes), an opcode of 81h must be clocked into the device followed by three address bytes comprised of 2 page address bytes that specify the page in the main memory to be erased, and 1 dummy byte.

The sequence of issuing PE instruction is: CS# goes low → sending PE instruction code → 3-byte address on SI → CS# goes high

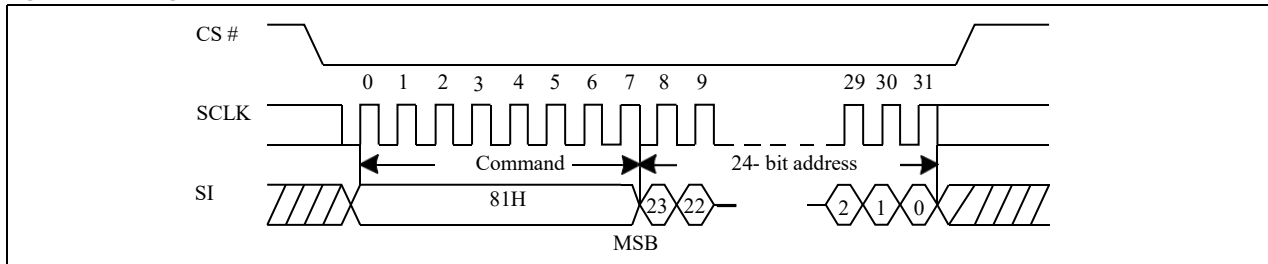**Figure 5-19 Page Erase Sequence (Command 81)**


## 5.20. Sector Erase (SE)

The Sector Erase (SE) instruction is for erasing the data of the chosen sector to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Sector Erase (SE). Any address of the sector is a valid address for Sector Erase (SE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

Address bits [Am-A12] (Am is the most significant address) select the sector address.

The sequence of issuing SE instruction is: CS# goes low → sending SE instruction code → 3-byte address on SI → CS# goes high.

The SIO[3:1] are don't care.

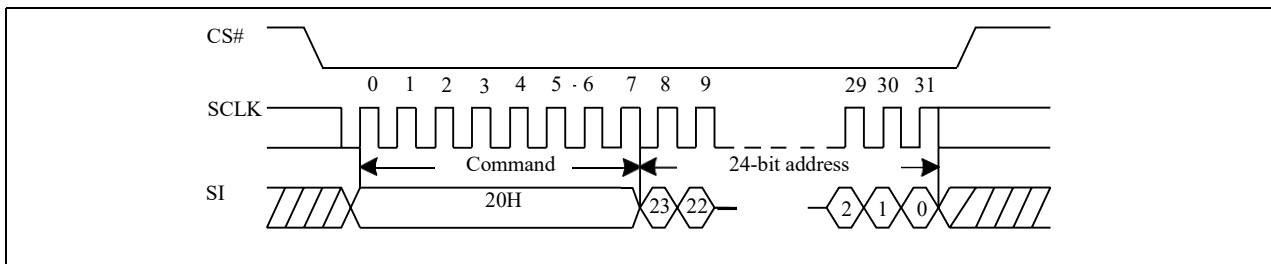**Figure 5-20 Sector Erase (SE) Sequence (Command 20)**


## 5.21. Block Erase (BE32K)

The Block Erase (BE32K) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 32K-byte block erase operation. A Write Enable (WREN) instruction must be executed to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE32K). Any address of the block is a valid address for Block Erase (BE32K) instruction. The CS# must go high exactly at the byte boundary (the least significant bit of address byte has been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE32K instruction is: CS# goes low → sending BE32K instruction code → 3-byte address on SI → CS# goes high.

The SIO[3:1] are don't care.

The self-timed Block Erase Cycle time (tBE32K) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked while the Block Erase cycle is in progress. The WIP sets during the tBE32K timing, and clears when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is cleared. If the block is protected by BP4, BP3, BP2, BP1, BP0 bits, the array data will be protected (no change) and the WEL bit still be reset.

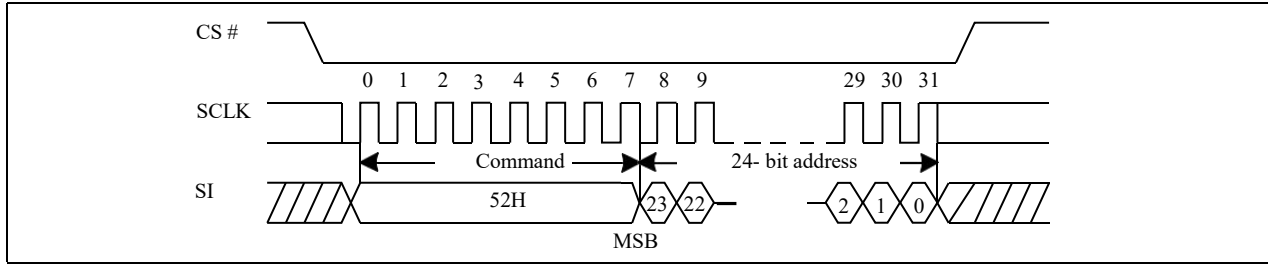**Figure 5-21 Block Erase 32K(BE32K) Sequence (Command 52)**


## 5.22. Block Erase (BE)

The Block Erase (BE) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 64K-byte block erase operation. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE). Any address of the block is a valid address for Block Erase (BE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE instruction is: CS# goes low→ sending BE instruction code→ 3-byte address on SI→CS# goes high.

The SIO[3:1] are "don't care".

The self-timed Block Erase Cycle time (tBE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Block Erase cycle is in progress. The WIP sets 1 during the tBE timing, and sets 0 when Block Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the block is protected by BP4, BP3, BP2, BP1, BP0 bits, the Block Erase (BE) instruction will not be executed on the block.

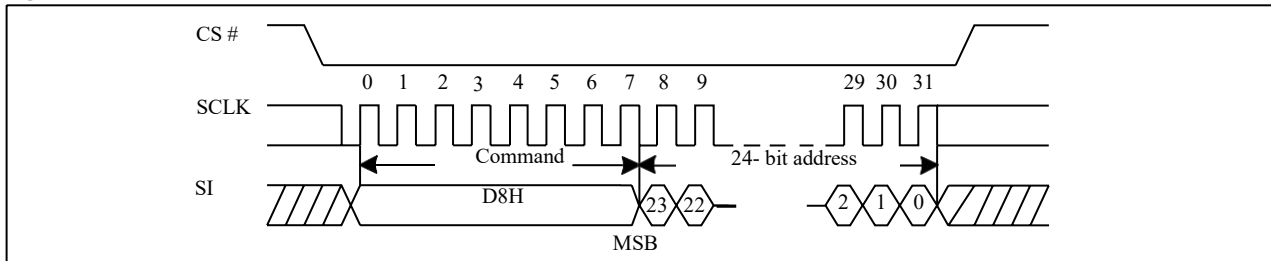**Figure 5-22 Block Erase (BE) Sequence (Command D8)**

## 5.23. Chip Erase (CE)

The Chip Erase (CE) instruction is for erasing the data of the whole chip to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Chip Erase (CE). The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.


The sequence of issuing CE instruction is: CS# goes low→ sending CE instruction code→ CS# goes high.

The SIO[3:1] are "don't care".

The self-timed Chip Erase Cycle time (tCE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Chip Erase cycle is in progress. The WIP sets 1 during the tCE timing, and sets 0 when Chip Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If

the chip is protected by BP4, BP3, BP2, BP1, BP0 bits, the Chip Erase (CE) instruction will not be executed. It will be only executed when all Block Protect (BP4, BP3, BP2, BP1, BP0) are set to "None protected".

**Figure 5-23 Chip Erase (CE) Sequence (Command 60 or C7)**

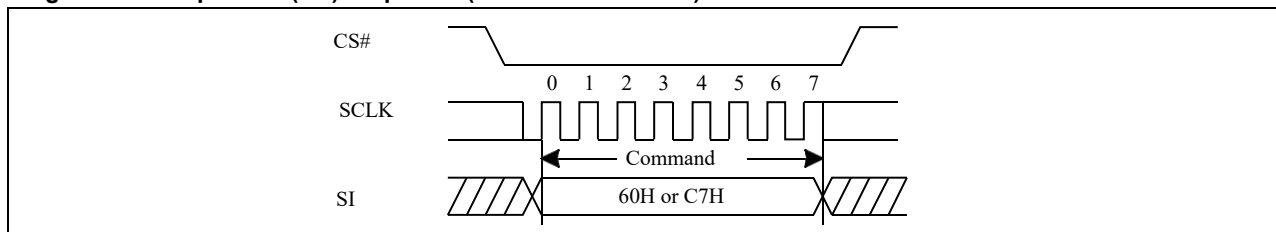

## 5.24. Page Program (PP)

The Page Program (PP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Page Program (PP). The device programs only the last 256 data bytes sent to the device. If the entire 256 data bytes are going to be programmed, A7-A0 (The eight least significant address bits) should be set to 0. If the eight least significant address bits (A7-A0) are not all 0, all transmitted data going beyond the end of the current page are programmed from the start address of the same page (from the address A7-A0 are all 0). If more than 256 bytes are sent to the device, the data of the last 256-byte is programmed at the request page and previous data will be disregarded. If less than 256 bytes are sent to the device, the data is programmed at the requested address of the page without effect on other address of the same page.


The sequence of issuing PP instruction is: CS# goes low → sending PP instruction code → 3-byte address on SI → at least 1-byte on data on SI → CS# goes high.

The CS# must be kept low during the whole Page Program cycle; The CS# must go high exactly at the byte boundary (the latest eighth bit of data being latched in), otherwise the instruction will be rejected and will not be executed.

The self-timed Page Program Cycle time (t<sub>PP</sub>) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be checked during the Page Program cycle is in progress. The WIP sets 1 during the t<sub>PP</sub> timing, and sets 0 when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the page is protected by BP4, BP3, BP2, BP1, BP0 bits, the Page Program (PP) instruction will not be executed.

The SIO[3:1] are "don't care".

Figure 5-24 Page Program (PP) Sequence (Command 02)

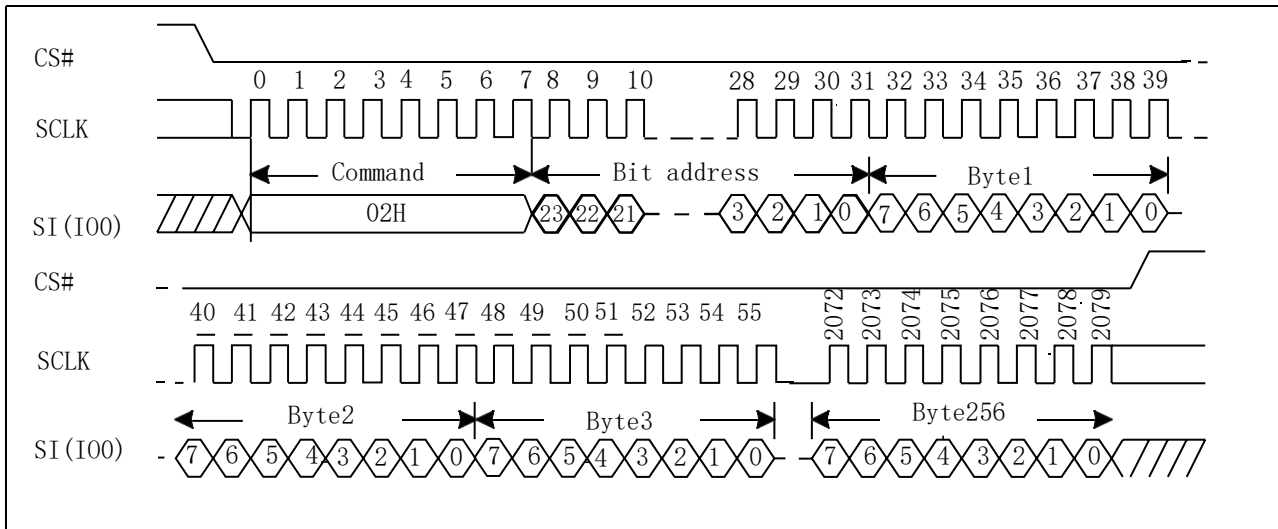


### 5.25. Dual Input Page Program (DPP)

The Dual Input Page Program (DPP) instruction is similar to the standard Page Program command and can be used to program anywhere from a single byte of data up to 256 bytes of data into previously erased memory locations. The Dual-Input Page Program command allows two bits of data to be clocked into the device on every clock cycle rather than just one.

A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Dual Input Page Program (DPP). The Dual Input Page Programming takes two pins: SIO0, SIO1 as data input, which can improve programmer performance and the effectiveness of application. The other function descriptions are as same as standard page program.

The sequence of issuing DPP instruction is: CS# goes low → sending DPP instruction code → 3-byte address on SI → at least 1-byte on data on SIO[1:0] → CS# goes high.

Figure 5-25 Page Program (DPP) Sequence (Command A2)

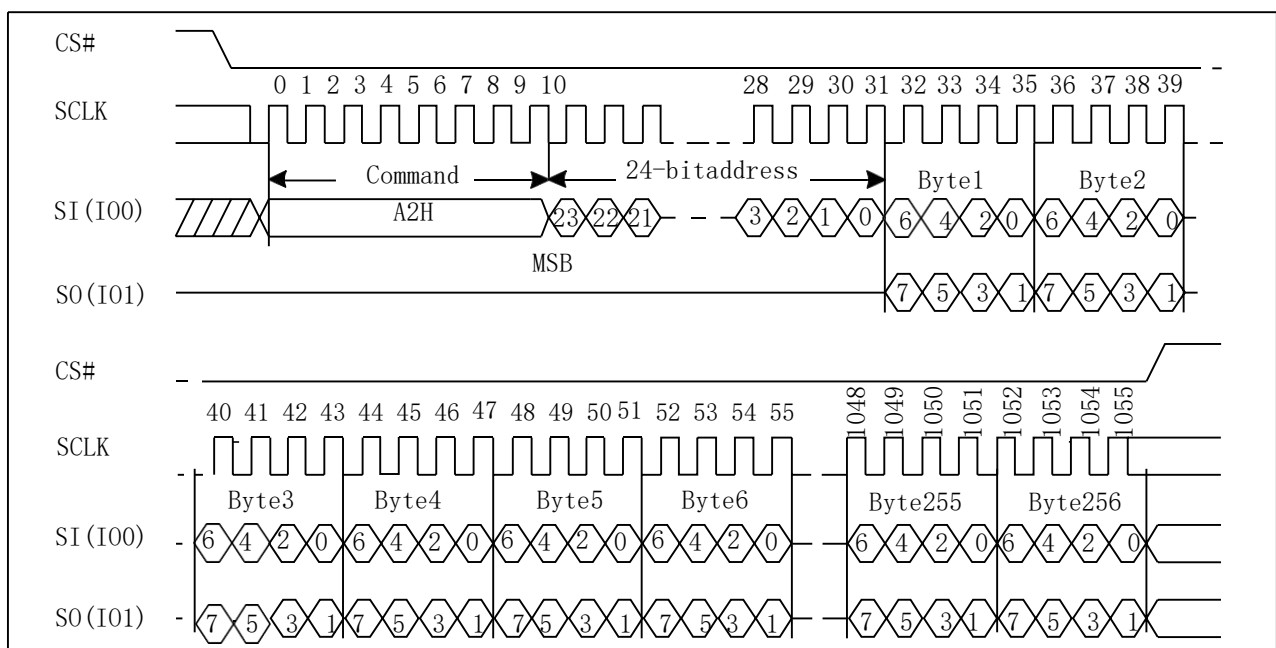


## 5.26. Quad Page Program (QPP)

The Quad Page Program (QPP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit and Quad Enable (QE) bit must be set to "1" before sending the Quad Page Program (QPP). The Quad Page Programming takes four pins: SIO0, SIO1, SIO2, and SIO3 as data input, which can improve programmer performance and the effectiveness of application. The QPP operation frequency supports as fast as fQPP. The other function descriptions are as same as standard page program.

The sequence of issuing QPP instructions: CS# goes low → sending QPP instruction code → 3-byte address on SI → at least 1-byte on data on SIO[1:0] → CS# goes high.

**Figure 5-26 Page Program (QPP) Sequence (Command 32)**

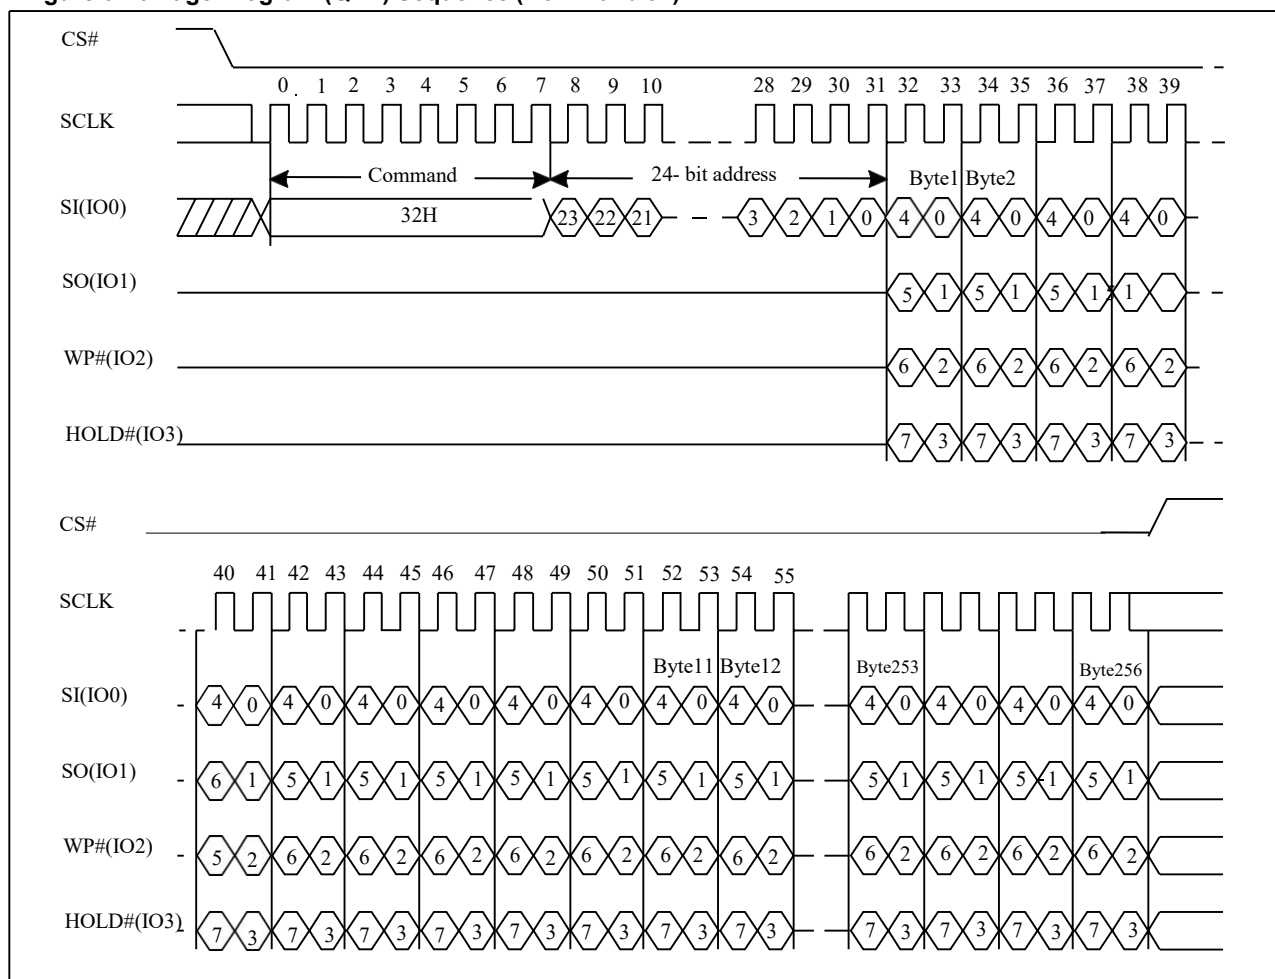

## 5.27. Erase Security Registers (ERSCUR)

The product provides three 512-byte Security Registers which can be erased and programmed individually. These registers may be used by the system manufacturers to store security and other important information separately from the main memory array.


The Erase Security Registers command is similar to Sector/Block Erase command, the instruction is used for 512-byte erase operation. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit.

The Erase Security Registers command sequence: CS# goes low → sending ERSCUR instruction → sending 24 bit address → CS# goes high.

CS# must be driven high after the eighth bit of the command code has been latched in; otherwise the Erase Security Registers command is not executed. As soon as CS# is driven high, the self-timed Erase Security Registers cycle (whose duration is  $t_{SE}$ ) is initiated. While the Erase Security Registers cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Erase Security Registers cycle, and is 0 when it is completed. The Security Registers Lock Bit (LB3-1) in the Status Register can be used to OTP protect the security registers. Once the LB bit is set to 1, the Security Registers will be permanently locked; the Erase Security Registers command will

| Address              | A23-16 | A15-12 | A11-9 | A8-0       |
|----------------------|--------|--------|-------|------------|
| Security Register #1 | 00H    | 0001   | 000   | Don't care |
| Security Register #2 | 00H    | 0010   | 000   | Don't care |
| Security Register #3 | 00H    | 0011   | 000   | Don't care |

**Figure 5-27 Erase Security Registers (ERSCUR) Sequence (Command 44)**

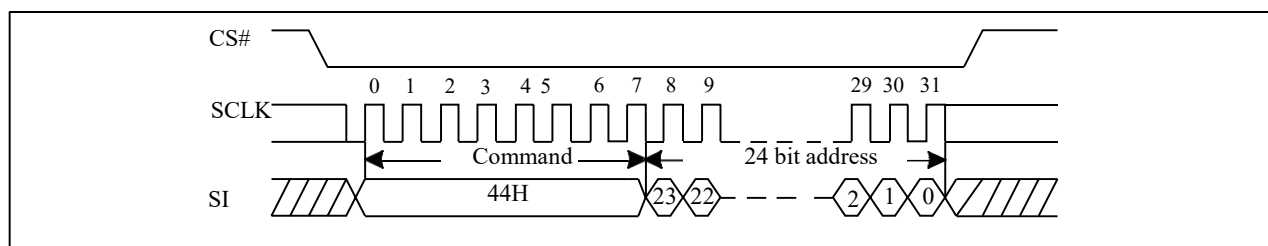

## 5.28. Program Security Registers (PRSCUR)

The Program Security Registers command is similar to the Page Program command. It allows from 1 to 512bytes Security Registers data to be programmed. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit before sending the Program Security Registers command.


The Program Security Registers command sequence: CS# goes low → sending PRSCUR instruction → sending 24 bit address → sending at least one byte data → CS# goes high.

As soon as CS# is driven high, the self-timed Program Security Registers cycle (whose duration is tPP) is initiated. While the Program Security Registers cycle is in progress, the Status Register may be read to check the value of the Write in Progress (WIP) bit. The Write in Progress (WIP) bit is 1 during the self-timed Program Security Registers cycle, and is 0 when it is completed.

If the Security Registers Lock Bit (LB3-1) is set to 1, the Security Registers will be permanently locked. Program Security Registers command will be ignored.

| Address              | A23-16 | A15-12 | A5-9 | A8-0         |
|----------------------|--------|--------|------|--------------|
| Security Register #1 | 00H    | 0001   | 000  | Byte Address |
| Security Register #2 | 00H    | 0010   | 000  | Byte Address |
| Security Register #3 | 00H    | 0011   | 000  | Byte Address |

Figure 5-28 Program Security Registers (PRSCUR) Sequence (Command 42)

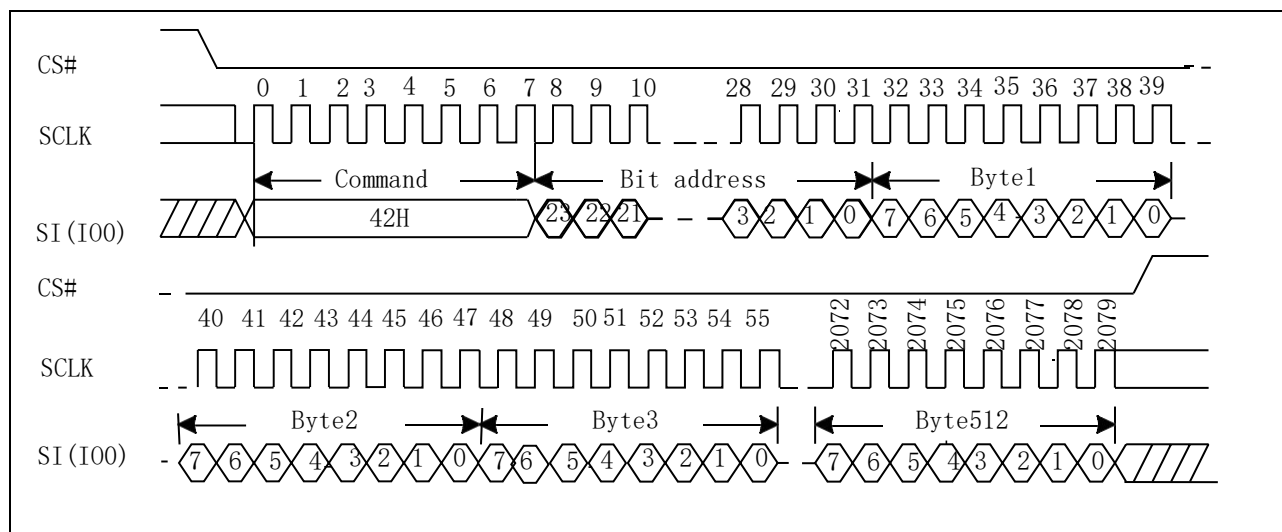


## 5.29. Read Security Registers (RDSCUR)

The Read Security Registers command is similar to Fast Read command. The command is followed by a 3-byte address (A23-A0) and a dummy byte, each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency  $f_C$ , during the falling edge of SCLK. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. Once the A8-A0 address reaches the last byte of the register (Byte 1FFH), it will reset to 000H, the command is completed by driving CS# high.

The sequence of issuing RDSCUR instruction is : CS# goes low → sending RDSCUR instruction → sending 24 bit address → 8 bit dummy byte → Security Register data out on SO → CS# goes high.

| Address              | A23-16 | A15-12 | A5-9 | A8-0         |
|----------------------|--------|--------|------|--------------|
| Security Register #1 | 00H    | 0001   | 000  | Byte Address |
| Security Register #2 | 00H    | 0010   | 000  | Byte Address |
| Security Register #3 | 00H    | 0011   | 000  | Byte Address |

Figure 5-29 Read Security Registers (RDSCUR) Sequence (Command 48)

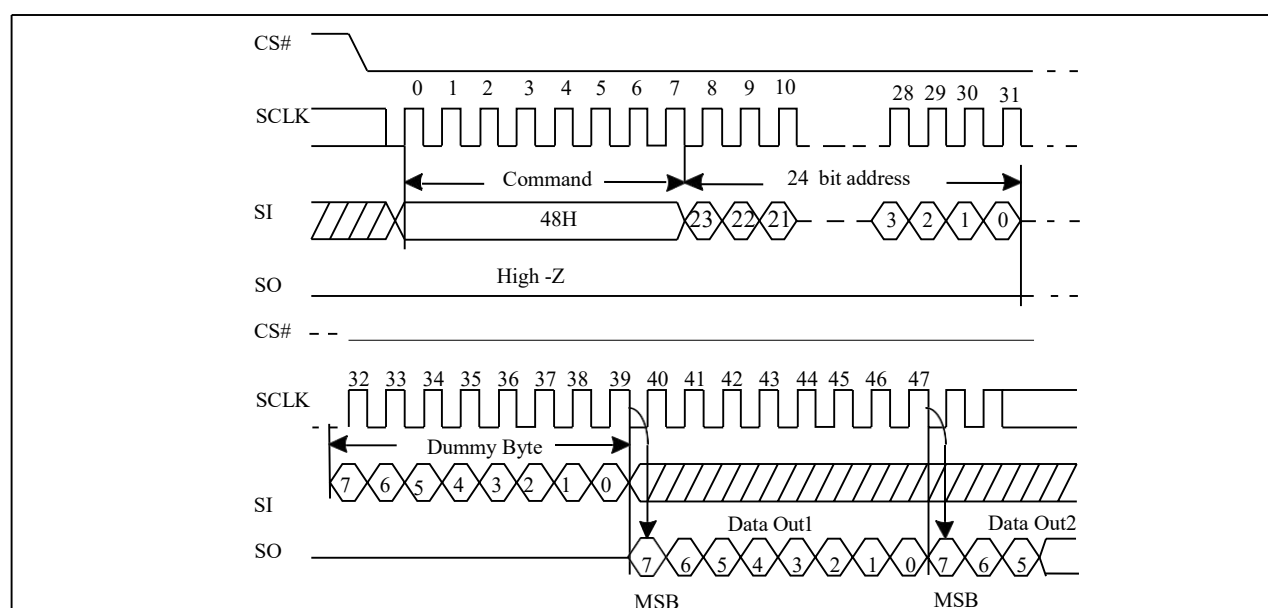

### 5.30. Deep Power-down (DP)

The Deep Power-down (DP) instruction is for setting the device on the minimizing the power consumption (to entering the Deep Power-down mode), the standby current is reduced from ISB1 to ISB2). The Deep

Power-down mode requires the Deep Power-down (DP) instruction to enter, during the Deep Power-down mode, the device is not active and all Write/Program/Erase instruction are ignored. When CS# goes high, it's only in standby mode not deep power-down mode. It's different from Standby mode.


The sequence of issuing DP instruction is: CS# goes low→ sending DP instruction code→ CS# goes high.

Once the DP instruction is set, all instruction will be ignored except the Release from Deep Power-down mode (RDP) and Read Electronic Signature (RES) instruction. (RES instruction to allow the ID been read out).

When Power-down, the deep power-down mode automatically stops, and when power-up, the device automatically is in standby mode. For RDP instruction the CS# must go high exactly at the byte boundary (the latest eighth bit of instruction code been latched-in); otherwise, the instruction will not be executed. As soon as Chip Select (CS#) goes high, a delay of  $t_{DP}$  is required before entering the Deep Power-down mode and reducing the current to ISB2.

Once the DP instruction is set, all instruction will be ignored except the Release from Deep Power-down mode (RDP) and Read Electronic Signature (RES) instruction. (RES instruction to allow the ID been read out).

**Figure 5-30 Deep Power-down (DP) Sequence (Command B9)**

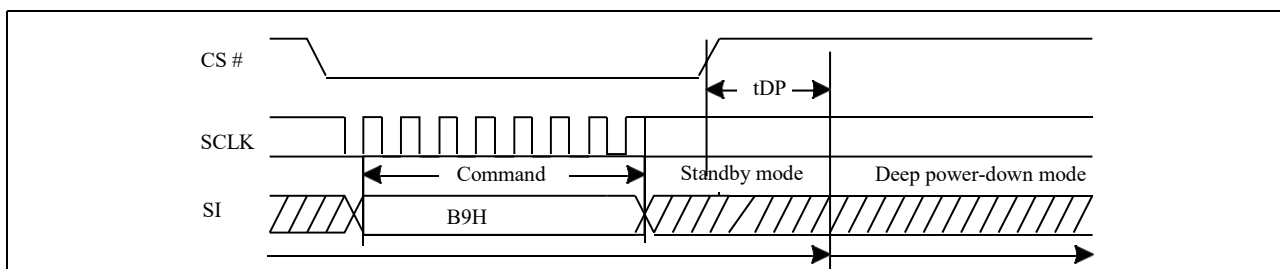

### 5.31. Release from Deep Power-Down (RDP), Read Electronic Signature (RES)


The Release from Deep Power-down (RDP) instruction is terminated by driving Chip Select (CS#) High. When Chip Select (CS#) is driven high, the device is put in the Stand-by Power mode. If the device was not previously in the Deep Power-down mode, the transition to the Stand-by Power mode is immediate. If the device was previously in the Deep Power-down mode, though, the transition to the Stand-by Power mode is delayed by  $t_{RES2}$ , and Chip Select (CS#) must remain High for at least  $t_{RES2}(\max)$ . Once in the Stand-by Power mode, the device waits to be selected, so that it can receive, decode and execute instructions.

RES instruction is for reading out the old style of 8-bit Electronic Signature, whose values are shown as table of ID Definitions. This is not the same as RDID instruction. It is not recommended to use for new design. For new design, please use RDID instruction. Even in Deep power-down mode, the RDP and RES are also allowed to be executed, only except the device is in progress of program/erase/write cycle; there's no effect on the current program/erase/ write cycle in progress.


The RES instruction is ended by CS# goes high after the ID been read out at least once. The ID outputs repeatedly if continuously send the additional clock cycles on SCLK while CS# is at low. If the device was not previously in Deep Power-down mode, the device transition to standby mode is immediate. If the device was previously in Deep Power-down mode, there's a delay of  $t_{RES2}$  to transit to standby mode, and CS# must remain to high at least  $t_{RES2}(\max)$ . Once in the standby mode, the device waits to be selected, so it can be receive, decode, and execute instruction.

The RDP instruction is for releasing from Deep Power-Down Mode.

**Figure 5-31 Read Electronic Signature (RES) Sequence (Command AB)**

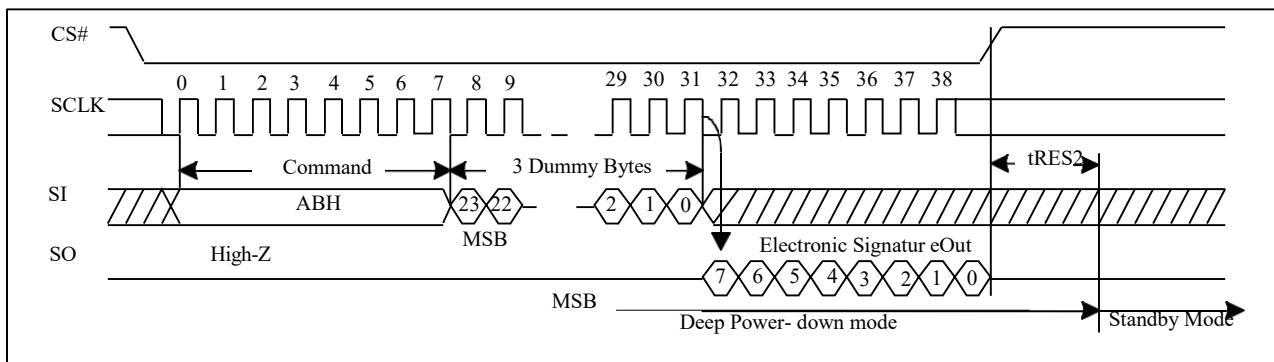

**Figure 5-32 Release from Deep Power-down (RDP) Sequence (Command AB)**

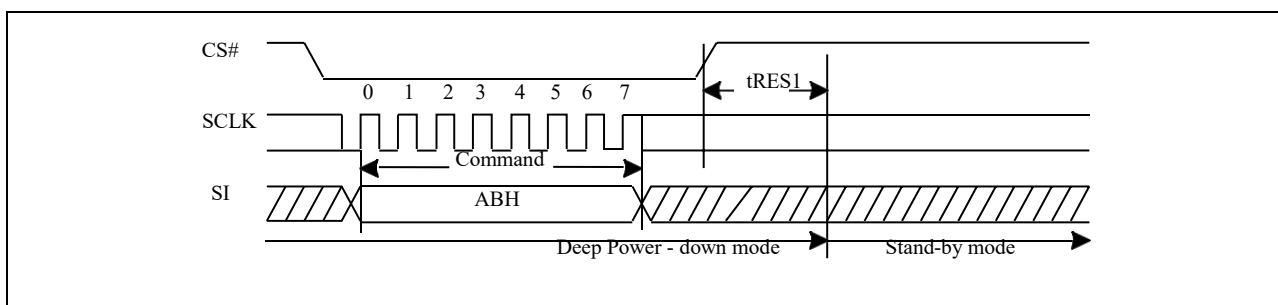


### 5.32. Read Electronic Manufacturer ID & Device ID (REMS)

The REMS instruction returns both the JEDEC assigned manufacturer ID and the device ID. The Device ID values are listed in "Table ID Definitions".

The REMS instruction is initiated by driving the CS# pin low and sending the instruction code "90h" followed by two dummy bytes and one address byte (A7~A0). After which the manufacturer ID for Zetta and the device ID are shifted out on the falling edge of SCLK with the most significant bit (MSB) first. If the least significant bit (LSB) of the address byte is 0b, the manufacturer ID will be output first, followed by the device ID. If the least significant bit (LSB) of the address byte is 1b, then the device ID will be output first, followed by the manufacturer ID. While CS# is low, the manufacturer and device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 5-32 Read Electronic Manufacturer & Device ID (REMS) Sequence (Command 90)**

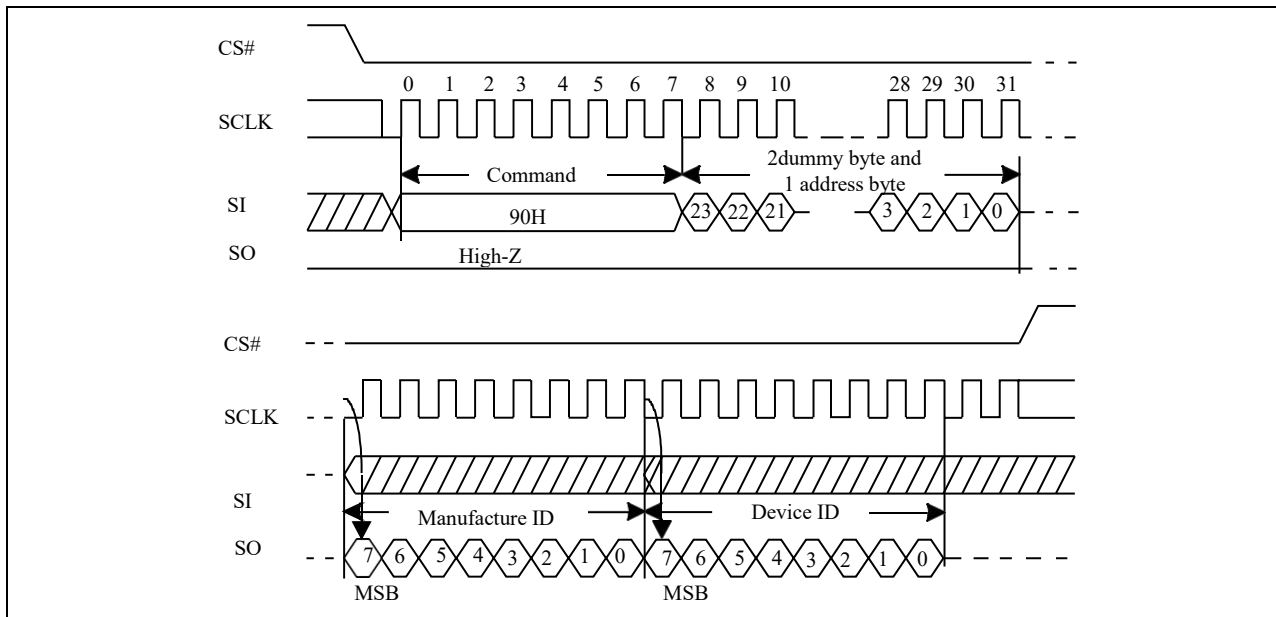


### 5.33. Dual I/O Read Electronic Manufacturer ID & Device ID (DREMS)

The DREMS instruction is similar to the REMS command and returns the JEDEC assigned manufacturer ID which takes two pins: SIO0, SIO1 as address input and ID output I/O

The instruction is initiated by driving the CS# pin low and shift the instruction code "92h" followed by two dummy bytes and one bytes address (A7~A0). , 8-bit "Continuous Read Mode" bits (M7-0) .After which, the Manufacturer ID for Zetta and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first. If the least significant bit (LSB) of the one-byte address is initially set to 1b, then the device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

**Figure 5-33 DUAL I/O Read Electronic Manufacturer & Device ID (DREMS) Sequence (Command 92)**

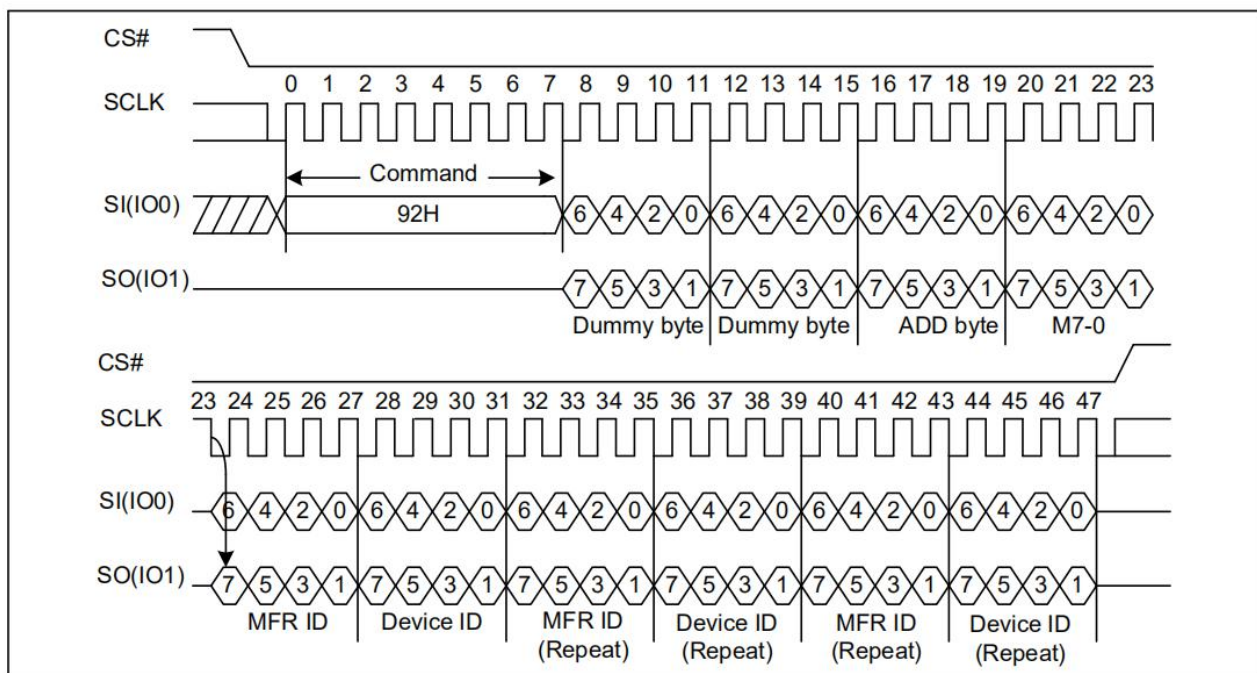


### 5.34. Quad I/O Read Electronic Manufacturer ID & Device ID (QREMS)

The QREMS instruction is similar to the REMS command and returns the JEDEC assigned manufacturer ID which takes four pins: SIO0, SIO1, SIO2, SIO3 as address input and ID output I/O

The instruction is initiated by driving the CS# pin low and shift the instruction code "94h" followed by two dummy bytes and one bytes address (A7~A0). 8-bit "Continuous Read Mode" bits (M7-0) and then two dummy bytes. After which, the Manufacturer ID for Zetta and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first. If the least significant bit (LSB) of the one-byte address is initially set to 1b, then the device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.

Figure 5-34 QUAD I/O Read Electronic Manufacturer & Device ID (QREMS) Sequence (Command 94)

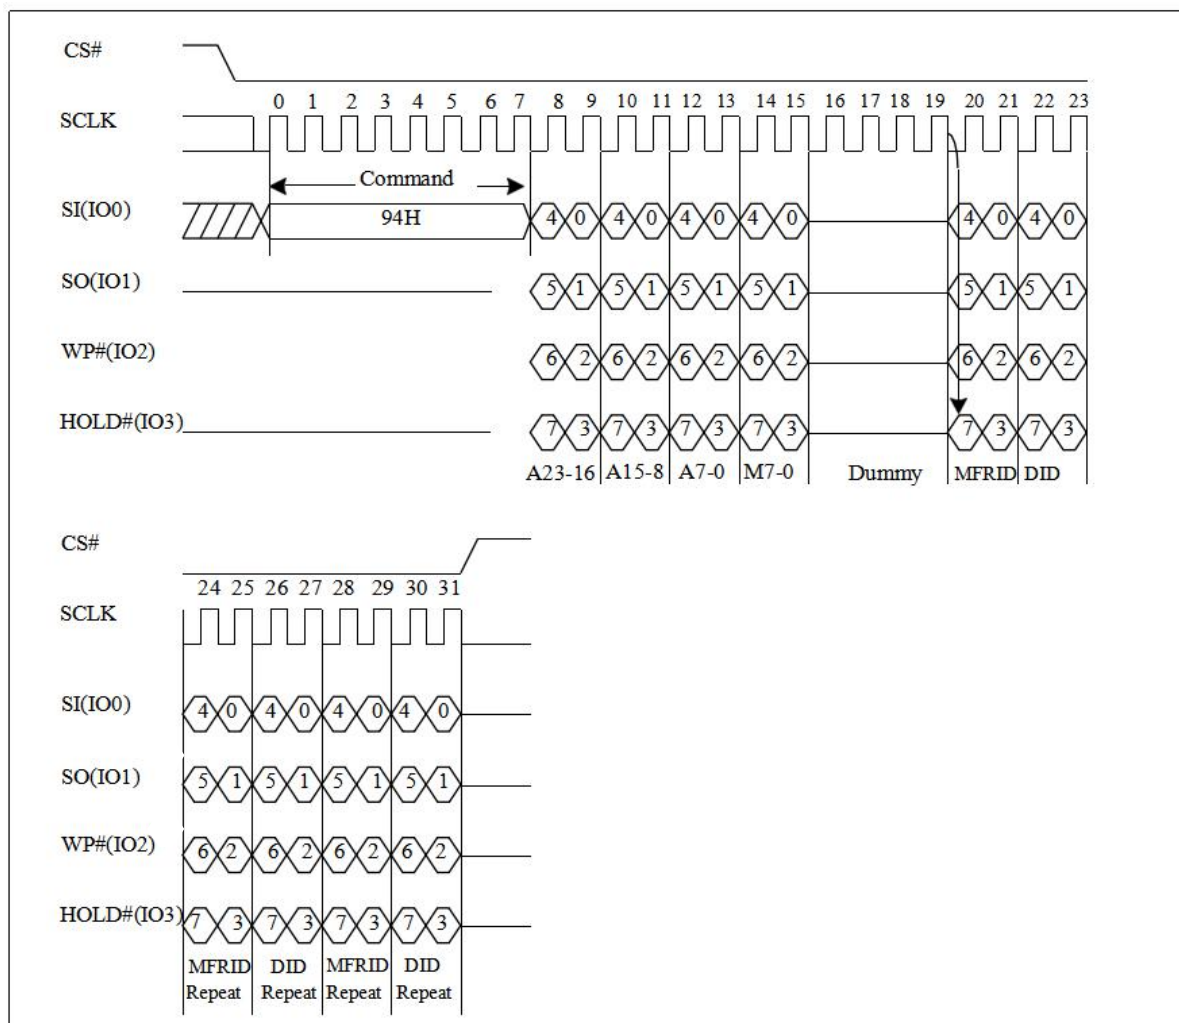


### 5.35. Read Identification (RDID)

The RDID instruction is for reading the manufacturer ID of 1-byte and followed by Device ID of 2-byte. The Zetta Manufacturer ID and Device ID are list as “as "Table . ID Definitions”.

The sequence of issuing RDID instruction is: CS# goes low→ sending RDID instruction code → 24-bits ID data out on SO→ to end RDID operation can use CS# to high at any time during data out.

While Program/Erase operation is in progress, it will not decode the RDID instruction, so there's no effect on the cycle of program/erase operation which is currently in progress. When CS# goes high, the device is at standby stage.

**Figure 5-35 Read Identification(RDID) Sequence (Command 9F)**

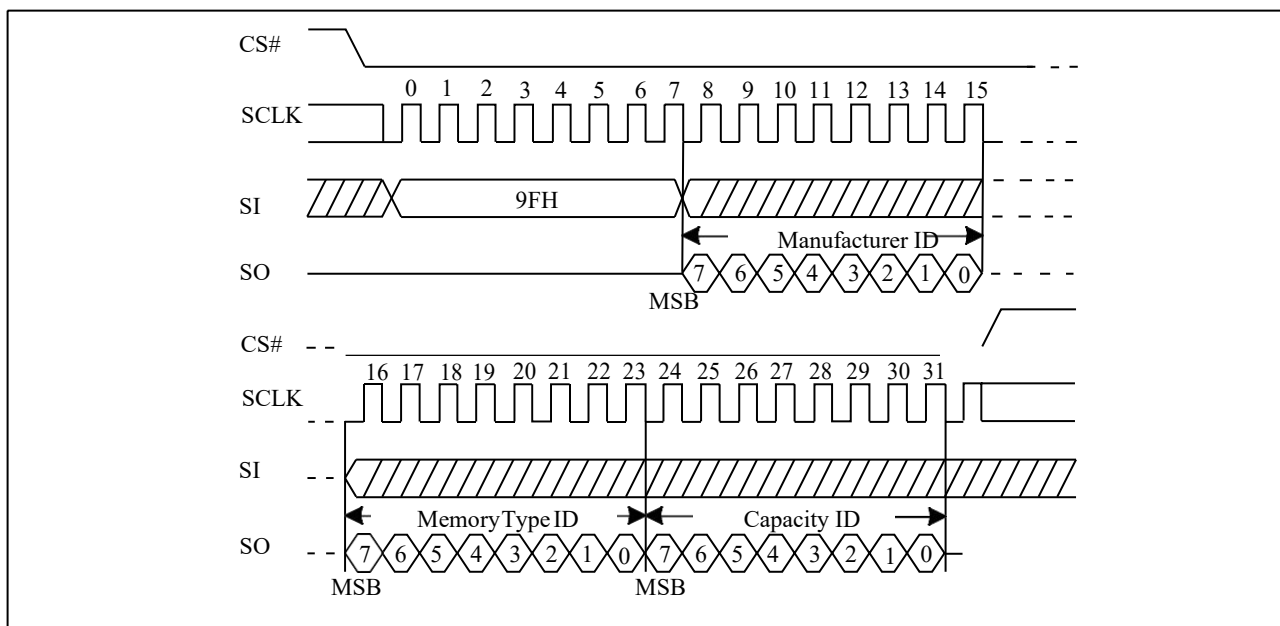

**Table ID Definitions**

| ZD25WQ16B | RDID<br>command | manufacturer ID | memory type | memory density |
|-----------|-----------------|-----------------|-------------|----------------|
|           |                 | BA              | 60          | 15             |
|           | RES<br>command  | electronic ID   |             |                |
|           |                 | 14              |             |                |
|           | REMS<br>command | manufacturer ID | device ID   |                |
|           |                 | BA              | 14          |                |

### 5.36. Program/Erase Suspend/Resume

The Suspend instruction interrupts a Page Program, Sector Erase, or Block Erase operation to allow access to the memory array. After the program or erase operation has entered the suspended state, the memory array can be read except for the page being programmed or the sector or block being erased.

**Readable Area of Memory While a Program or Erase Operation is Suspended**

| Suspended Operation | Readable Region of Memory Array     |
|---------------------|-------------------------------------|
| Page Program        | All but the Page being programmed   |
| Page Erase          | All but the Page being erased       |
| Sector Erase(4KB)   | All but the 4KB Sector being erased |
| Block Erase(32KB)   | All but the 32KB Block being erased |
| Block Erase(64KB)   | All but the 64KB Block being erased |

When the Serial NOR Flash receives the Suspend instruction, there is a latency of tPSL or tESL before the Write Enable Latch (WEL) bit clears to “0” and the SUS2 or SUS1 sets to “1”, after which the device is ready to accept one of the commands listed in "Table Acceptable Commands During Program/Erase Suspend after tPSL/tESL" (e.g. FAST READ). Refer to "AC Characteristics" for tPSL and tESL timings. "Table Acceptable Commands During Suspend (tPSL/tESL not required)" lists the commands for which the tPSL and tESL latencies do not apply. For example, RDSR, RDSCUR, RSTEN, and RST can be issued at any time after the Suspend instruction.


Status Register bit 15 (SUS2) and bit 10 (SUS1) can be read to check the suspend status. The SUS2 (Program Suspend Bit) sets to “1” when a program operation is suspended. The SUS1 (Erase Suspend Bit) sets to “1” when an erase operation is suspended. The SUS2 or SUS1 clears to “0” when the program or erase operation is resumed.

**Acceptable Commands During Program/Erase Suspend after tPSL/tESL**

| Command name | Command Code | Suspend Type    |               |
|--------------|--------------|-----------------|---------------|
|              |              | Program Suspend | Erase Suspend |
| READ         | 03H          | •               | •             |
| FAST READ    | 0BH          | •               | •             |
| DREAD        | 3BH          | •               | •             |
| QREAD        | 6BH          | •               | •             |
| 2READ        | BBH          | •               | •             |
| 4READ        | EBH          | •               | •             |
| RDSFDP       | 5AH          | •               | •             |
| RDID         | 9FH          | •               | •             |
| REMS         | 90H          | •               | •             |
| DREMS        | 92H          | •               | •             |
| QREMS        | 94H          | •               | •             |
| RDSCUR       | 48H          | •               | •             |
| SBL          | 77H          | •               | •             |
| WREN         | 06H          |                 | •             |
| RESUME       | 7AH OR 30H   | •               | •             |
| PP           | 02H          |                 | •             |
| DPP          | A2H          |                 | •             |
| QPP          | 32H          |                 | •             |

**Acceptable Commands During Suspend (tPSL/tESL not required)**


| Command name | Command Code | Suspend Type    |               |
|--------------|--------------|-----------------|---------------|
|              |              | Program Suspend | Erase Suspend |
| WRDI         | 04H          | •               | •             |
| RDSR         | 05H          | •               | •             |
| RDSR2        | 35H          | •               | •             |
| ASI          | 25H          | •               | •             |
| RES          | ABH          | •               | •             |
| RSTEN        | 66H          | •               | •             |
| RST          | 99H          | •               | •             |
| NOP          | 00H          | •               | •             |

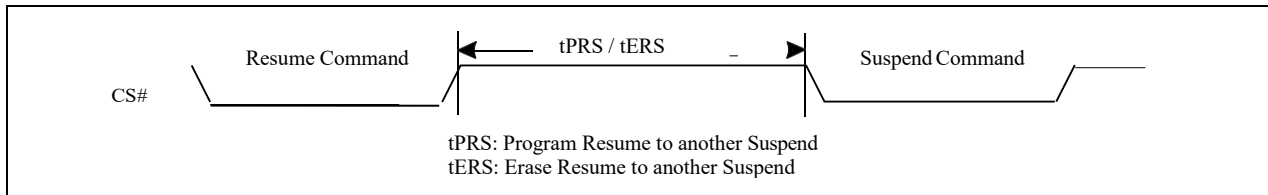**Figure 5-36 Resume to Suspend Latency**

### 5.37. Erase Suspend to Program

The “Erase Suspend to Program” feature allows Page Programming while an erase operation is suspended. Page Programming is permitted in any unprotected memory except within the sector of a suspended Sector Erase operation or within the block of a suspended Block Erase operation. The Write Enable (WREN) instruction must be issued before any Page Program instruction.

A Page Program operation initiated within a suspended erase cannot itself be suspended and must be allowed to finish before the suspended erase can be resumed. The Status Register can be polled to determine the status of the Page Program operation. The WEL and WIP bits of the Status Register will remain “1” while the Page Program operation is in progress and will both clear to “0” when the Page Program operation completes.

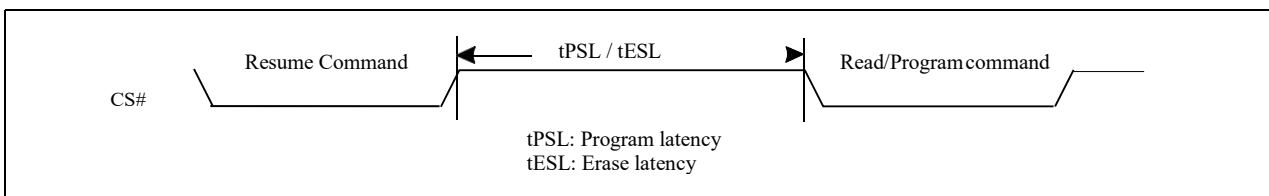**Figure 5-37 Suspend to Read/Program Latency**


Notes:

1. Please note that Program only available after the Erase-Suspend operation
2. To check suspend ready information, please read status register bit15 (SUS2) and bit10(SUS1)

### 5.38. Program Resume and Erase Resume

The Resume instruction resumes a suspended Page Program, Sector Erase, or Block Erase operation. Before issuing the Resume instruction to restart a suspended erase operation, make sure that there is no Page Program operation in progress.

Immediately after the Serial NOR Flash receives the Resume instruction, the WEL and WIP bits are set to “1” and the SUS2 or SUS1 is cleared to “0”. The program or erase operation will continue until finished (“Resume to Read Latency”) or until another Suspend instruction is received. A resume-to-suspend latency of tPRS or tERS must be observed before issuing another Suspend instruction (“Resume to Suspend Latency”).

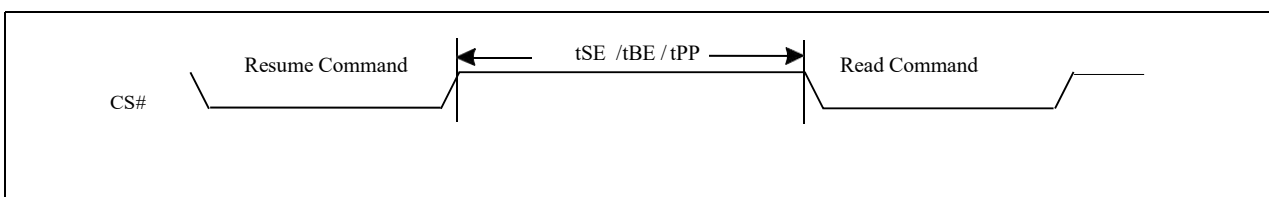**Figure 5-38 Resume to Read Latency**

### 5.39. No Operation (NOP)

The "No Operation" command is only able to terminate the Reset Enable (RSTEN) command and will not affect any other command.

The SIO[3:1] are don't care.

### 5.40. Software Reset (RSTEN/RST)


The Software Reset operation combines two instructions: Reset-Enable (RSTEN) command and Reset (RST) command. It returns the device to a standby mode. All the volatile bits and settings will be cleared then, which makes the device return to the default status as power on.

To execute Reset command (RST), the Reset-Enable (RSTEN) command must be executed first to perform the Reset operation. If there is any other command to interrupt after the Reset-Enable command, the


Reset-Enable will be invalid. The SIO[3:1] are "don't care".

If the Reset command is executed during program or erase operation, the operation will be disabled, the data under processing could be damaged or lost.

**Figure 5-40a Software Reset**

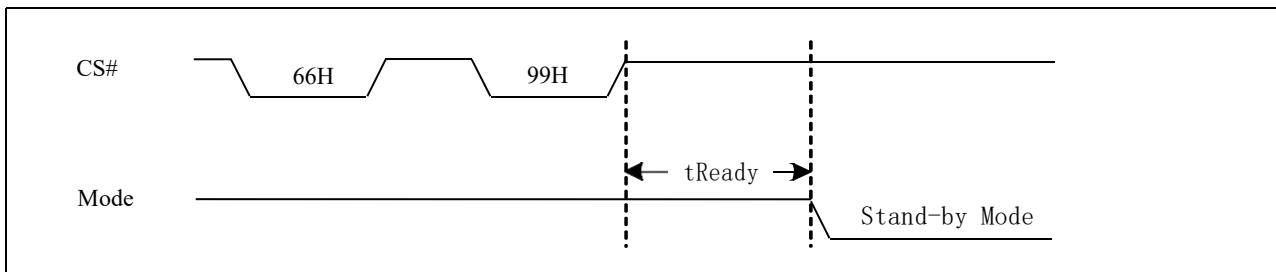

**Figure 5-40b Reset**

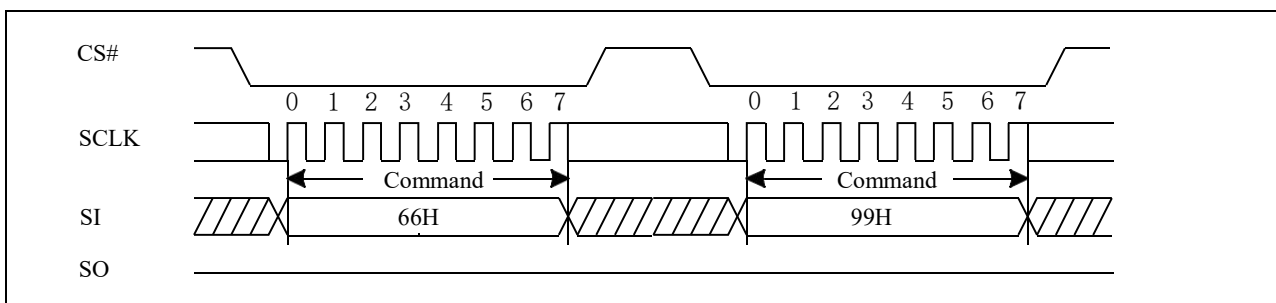


### 5.41. Read Unique ID (RUID)

The Read Unique ID command accesses a factory-set read-only 128bit number that is unique to each ZD25Qxx device. The Unique ID can be used in conjunction with user software methods to help prevent copying or cloning of a system.

The Read Unique ID command sequence: CS# goes low → sending Read Unique ID command → Dummy Byte1 → Dummy Byte2 → Dummy Byte3 → Dummy Byte4 → 128bit Unique ID Out → CS# goes high.

The command sequence is show below.

**Figure 5-41 Read Unique ID (RUID) Sequence (Command 4B)**

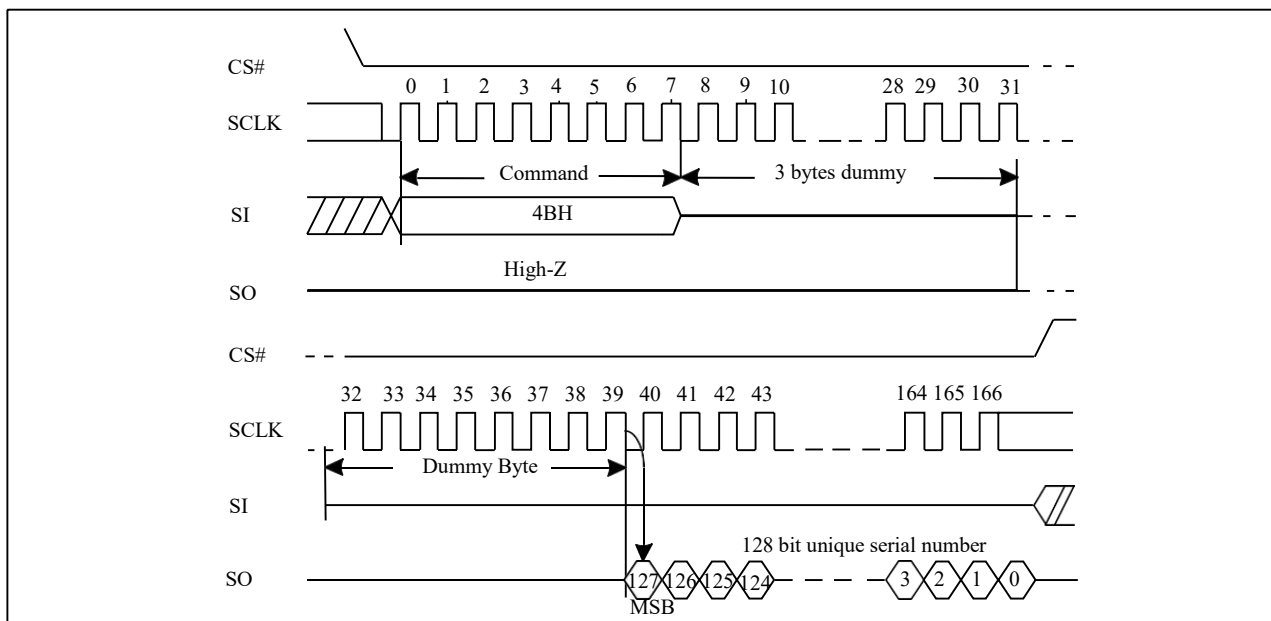


## 5.42. Read SFDP Mode (RDSFDP)

The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI.

The sequence of issuing RDSFDP instruction is same as FAST\_READ: CS# goes low→ send RDSFDP instruction (5Ah)→send 3 address bytes on SI pin→ send 1 dummy byte on SI pin→ read SFDP code on SO→ to end RDSFDP operation can use CS# to high at any time during data out. The lower byte (A7~A0) of the address is the valid address which is corresponded to the Add in the **Figure 5-42**.

SFDP is a JEDEC Standard, JESD216B.

**Figure 5-42 Read Serial Flash Discoverable Parameter(RDSFDP) Sequence**

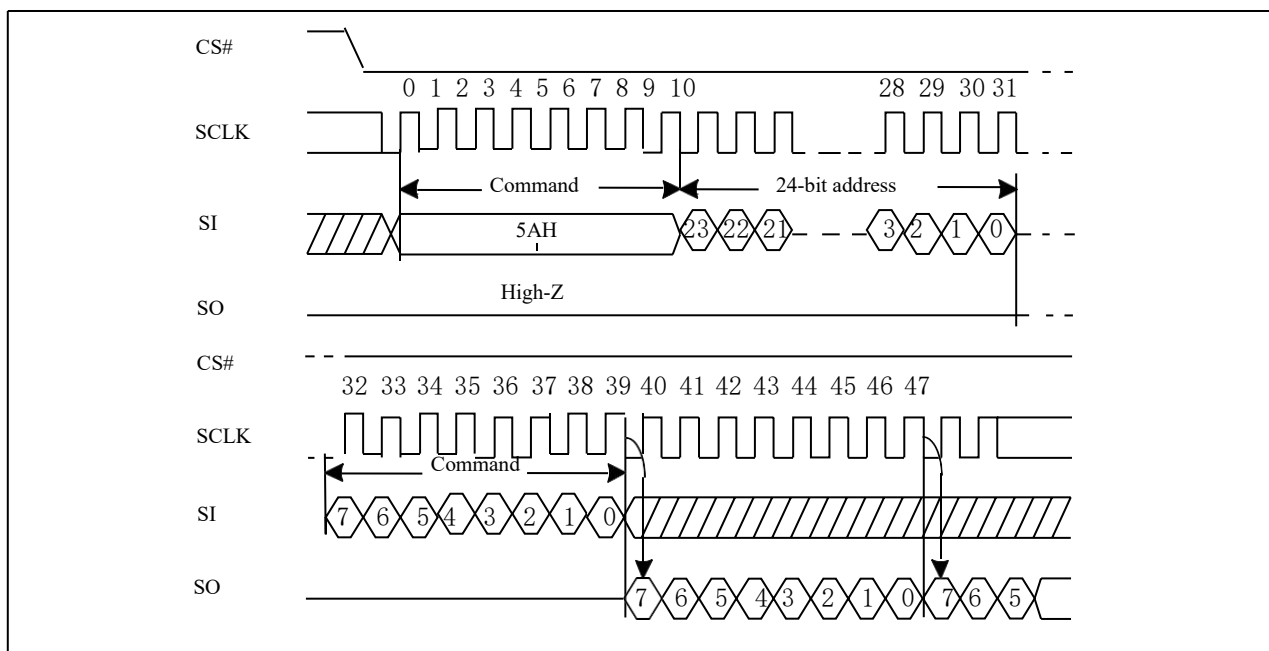

**Figure 5-42 Serial Flash Discoverable Parameter (SFDP) Table**

Table Signature and Parameter Identification Data Values

| Description                                | Comment                                      | Add(H)<br>(Byte) | DW Add<br>(Bit) | Data | Data |
|--------------------------------------------|----------------------------------------------|------------------|-----------------|------|------|
| SFDP Signature                             | Fixed:50444653H                              | 00H              | 07:00           | 53H  | 53H  |
|                                            |                                              | 01H              | 15:08           | 46H  | 46H  |
|                                            |                                              | 02H              | 23:16           | 44H  | 44H  |
|                                            |                                              | 03H              | 31:24           | 50H  | 50H  |
| SFDP Minor Revision Number                 | Start from 00H                               | 04H              | 07:00           | 00H  | 06H  |
| SFDP Major Revision Number                 | Start from 01H                               | 05H              | 15:08           | 01H  | 01H  |
| Number of Parameters Headers               | Start from 00H                               | 06H              | 23:16           | 01H  | 01H  |
| Unused                                     | Contains 0xFFH and can never be changed      | 07H              | 31:24           | FFH  | FFH  |
| ID number (JEDEC)                          | 00H: It indicates a JEDEC specified header   | 08H              | 07:00           | 00H  | 00H  |
| Parameter Table Minor Revision Number      | Start from 0x00H                             | 09H              | 15:08           | 00H  | 06H  |
| Parameter Table Major Revision Number      | Start from 0x01H                             | 0AH              | 23:16           | 01H  | 01H  |
| Parameter Table Length<br>(in double word) | How many DWORDs in the Parameter table       | 0BH              | 31:24           | 09H  | 09H  |
| Parameter Table Pointer (PTP)              | First address of JEDEC Flash Parameter table | 0CH              | 07:00           | 30H  | 30H  |
|                                            |                                              | 0DH              | 15:08           | 00H  | 00H  |
|                                            |                                              | 0EH              | 23:16           | 00H  | 00H  |
| Unused                                     | Contains 0xFFH and can never be changed      | 0FH              | 31:24           | FFH  | FFH  |
| ID Number<br>(TMCDevice Manufacturer ID)   | It is indicates TMC manufacturer ID          | 10H              | 07:00           | BAH  | BAH  |
| Parameter Table Minor Revision Number      | Start from 0x00H                             | 11H              | 15:08           | 00H  | 00H  |
| Parameter Table Major Revision Number      | Start from 0x01H                             | 12H              | 23:16           | 01H  | 01H  |
| Parameter Table Length<br>(in double word) | How many DWORDs in the Parameter table       | 13H              | 31:24           | 03H  | 03H  |
| Parameter Table Pointer (PTP)              | First address of TMC Flash Parameter table   | 14H              | 07:00           | 90H  | 90H  |
|                                            |                                              | 15H              | 15:08           | 00H  | 00H  |
|                                            |                                              | 16H              | 23:16           | 00H  | 00H  |
| Unused                                     | Contains 0xFFH and can never be changed      | 17H              | 31:24           | FFH  | FFH  |

Table Parameter Table (0): JEDEC Flash Parameter Tables

| Description                                                                       | Comment                                                                                                                                      | Add(H)<br>(Byte) | DW Add<br>(Bit) | Data      | Data |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------|-----------|------|
| Block/Sector Erase Size                                                           | 00: Reserved; 01: 4KB erase;<br>10: Reserved;<br>11: not support 4KB erase                                                                   | 30H              | 01:00           | 01b       | E5H  |
| Write Granularity                                                                 | 0: 1Byte, 1: 64Byte or larger                                                                                                                |                  | 02              | 1b        |      |
| Write Enable Instruction<br>Requested for Writing to Volatile<br>Status Registers | 0: Nonvolatile status bit<br>1: Volatile status bit<br>(BP status register bit)                                                              |                  | 03              | 0b        |      |
| Write Enable Opcode Select for<br>Writing to Volatile Status Registers            | 0: Use 50H Opcode,<br>1: Use 06H Opcode,<br>Note: If target flash status register is<br>Nonvolatile, then bits3 and 4 must<br>be set to 00b. |                  | 04              | 0b        |      |
| Unused                                                                            | Contains 111b and can never be<br>changed                                                                                                    |                  | 07:05           | 111b      |      |
| 4KB Erase Opcode                                                                  |                                                                                                                                              | 31H              | 15:08           | 20H       | 20H  |
| (1-1- 2) Fast Read                                                                | 0=Not support, 1=Support                                                                                                                     | 32H              | 16              | 1b        | F1H  |
| Address Bytes Number used in<br>addressing flash array                            | 00: 3Byte only, 01: 3 or 4Byte,<br>10: 4Byte only, 11: Reserved                                                                              |                  | 18:17           | 00b       |      |
| Double Transfer Rate (DTR)<br>clocking                                            | 0=Not support, 1=Support                                                                                                                     |                  | 19              | 0b        |      |
| (1-2- 2) FastRead                                                                 | 0=Not support, 1=Support                                                                                                                     |                  | 20              | 1b        |      |
| (1-4- 4) Fast Read                                                                | 0=Not support, 1=Support                                                                                                                     |                  | 21              | 1b        |      |
| (1-1- 4) Fast Read                                                                | 0=Not support, 1=Support                                                                                                                     |                  | 22              | 1b        |      |
| Unused                                                                            |                                                                                                                                              |                  | 23              | 1b        |      |
| Unused                                                                            |                                                                                                                                              | 33H              | 31:24           | FFH       | FFH  |
| Flash Memory Density                                                              |                                                                                                                                              | 37H:34H          | 31:00           | 00FFFFFFH |      |
| (1-4- 4) Fast Read Number of Wait<br>states                                       | 0 0000b: Wait states (Dummy<br>Clocks) not support                                                                                           | 38H              | 04:00           | 00100b    | 44H  |
| (1-4- 4) Fast Read Number of<br>Mode Bits                                         | 000b:Mode Bits not support                                                                                                                   |                  | 07:05           | 010b      |      |
| (1-4- 4) Fast Read Opcode                                                         |                                                                                                                                              | 39H              | 15:08           | EBH       | EBH  |
| (1-1- 4) Fast Read Number of Wait<br>states                                       | 0 0000b: Wait states (Dummy<br>Clocks) not support                                                                                           | 3AH              | 20:16           | 01000b    | 08H  |
| (1-1- 4) Fast Read Number of<br>Mode Bits                                         | 000b:Mode Bits not support                                                                                                                   |                  | 23:21           | 000b      |      |
| (1-1- 4) Fast Read Opcode                                                         |                                                                                                                                              | 3BH              | 31:24           | 6BH       | 6BH  |

| Description                              | Comment                                                         | Add(H)<br>(Byte) | DW Add<br>(Bit) | Data   | Data  |
|------------------------------------------|-----------------------------------------------------------------|------------------|-----------------|--------|-------|
| (1-1- 2) Fast Read Number of Wait states | 0 0000b: Wait states (Dummy Clocks) not support                 | 3CH              | 04:00           | 01000b | 08H   |
| (1-1- 2) Fast Read Number of Mode Bits   | 000b: Mode Bits not support                                     |                  | 07:05           | 000b   |       |
| (1-1- 2) Fast Read Opcode                |                                                                 | 3DH              | 15:08           | 3BH    | 3BH   |
| (1-2- 2) Fast Read Number of Wait states | 0 0000b: Wait states (Dummy Clocks) not support                 | 3EH              | 20:16           | 00000b | 80H   |
| (1-2- 2) Fast Read Number of Mode Bits   | 000b: Mode Bits not support                                     |                  | 23:21           | 100b   |       |
| (1-2- 2) Fast Read Opcode                |                                                                 | 3FH              | 31:24           | BBH    | BBH   |
| (2-2- 2) Fast Read                       | 0=not support 1=support                                         | 40H              | 00              | 0b     | EEH   |
| Unused                                   |                                                                 |                  | 03:01           | 111b   |       |
| (4-4- 4) Fast Read                       | 0=not support 1=support                                         |                  | 04              | 0b     |       |
| Unused                                   |                                                                 |                  | 07:05           | 111b   |       |
| Unused                                   |                                                                 | 43H:41H          | 31:08           | 0xFFH  | 0xFFH |
| Unused                                   |                                                                 | 45H:44H          | 15:00           | 0xFFH  | 0xFFH |
| (2-2- 2) Fast Read Number of Wait states | 0 0000b: Wait states (Dummy Clocks) not support                 | 46H              | 20:16           | 00000b | 00H   |
| (2-2- 2) Fast Read Number of Mode Bits   | 000b: Mode Bits not support                                     |                  | 23:21           | 000b   |       |
| (2-2- 2) Fast Read Opcode                |                                                                 | 47H              | 31:24           | FFH    | FFH   |
| Unused                                   |                                                                 | 49H:48H          | 15:00           | 0xFFH  | 0xFFH |
| (4-4- 4) Fast Read Number of Wait states | 0 0000b: Wait states (Dummy Clocks) not support                 | 4AH              | 20:16           | 00000b | 00H   |
| (4-4- 4) Fast Read Number of Mode Bits   | 000b: Mode Bits not support                                     |                  | 23:21           | 000b   |       |
| (4-4- 4) Fast Read Opcode                |                                                                 | 4BH              | 31:24           | FFH    | FFH   |
| Sector Type 1 Size                       | Sector/block size=2^N bytes 0x00b: this sector type don't exist | 4CH              | 07:00           | 0CH    | 0CH   |
| Sector Type 1 erase Opcode               |                                                                 | 4DH              | 15:08           | 20H    | 20H   |
| Sector Type 2 Size                       | Sector/block size=2^N bytes 0x00b: this sector type don't exist | 4EH              | 23:16           | 0FH    | 0FH   |
| Sector Type 2 erase Opcode               |                                                                 | 4FH              | 31:24           | 52H    | 52H   |
| Sector Type 3 Size                       | Sector/block size=2^N bytes 0x00b: this sector type don't exist | 50H              | 07:00           | 10H    | 10H   |
| Sector Type 3 erase Opcode               |                                                                 | 51H              | 15:08           | D8H    | D8H   |
| Sector Type 4 Size                       | Sector/block size=2^N bytes 0x00b: this sector type don't exist | 52H              | 23:16           | 00H    | 00H   |
| Sector Type 4 erase Opcode               |                                                                 | 53H              | 31:24           | FFH    | FFH   |

Table Parameter Table (1): Zetta Flash Parameter Tables


| Description                                                         | Comment                                                                               | Add(H)<br>(Byte) | DW Add<br>(Bit) | Data                | Data  |
|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------|-----------------|---------------------|-------|
| Vcc Supply Maximum Voltage                                          | 2000H=2.000V<br>2700H=2.700V<br>3600H=3.600V                                          | 91H:90H          | 15:00           | 3600H               | 3600H |
| Vcc Supply Minimum Voltage                                          | 1650H=1.650V<br>2250H=2.250V<br>2350H=2.350V<br>2700H=2.700V                          | 93H:92H          | 31:16           | 1650H               | 1650H |
| HW Reset# pin                                                       | 0=not support 1=support                                                               | 95H:94H          | 00              | 0b                  | F99EH |
| HW Hold# pin                                                        | 0=not support 1=support                                                               |                  | 01              | 1b                  |       |
| Deep Power Down Mode                                                | 0=not support 1=support                                                               |                  | 02              | 1b                  |       |
| SW Reset                                                            | 0=not support 1=support                                                               |                  | 03              | 1b                  |       |
| SW Reset Opcode                                                     | Should be issue Reset Enable(66H)<br>before Reset cmd.                                |                  | 11:04           | 1001 1001b<br>(99H) |       |
| Program Suspend/Resume                                              | 0=not support 1=support                                                               |                  | 12              | 1b                  |       |
| Erase Suspend/Resume                                                | 0=not support 1=support                                                               |                  | 13              | 1b                  |       |
| Unused                                                              |                                                                                       |                  | 14              | 1b                  |       |
| Wrap Around Read mode                                               | 0=not support 1=support                                                               |                  | 15              | 1b                  |       |
| Wrap - Around Read mode Opcode                                      |                                                                                       | 96H              | 23:16           | 77H                 | 77H   |
| Wrap - Around Read data length                                      | 08H:support 8B wra-paround read<br>16H:8B&16B<br>32H:8B&16B&32B<br>64H:8B&16B&32B&64B | 97H              | 31:24           | 64H                 | 64H   |
| Individualblock lock                                                | 0=not support 1=support                                                               | 9BH:98H          | 00              | 0b                  | EBFCH |
| Individual block lock bit<br>(Volatile/Nonvolatile)                 | 0=Volatile<br>1=Nonvolatile                                                           |                  | 01              | 0b                  |       |
| Individual block lock Opcode                                        |                                                                                       |                  | 09:02           | FFH                 |       |
| Individual blocklock Volatile<br>protect bit default protect status | 0=protect 1=unprotect                                                                 |                  | 10              | 0b                  |       |
| Secured OTP                                                         | 0=not support 1=support                                                               |                  | 11              | 1b                  |       |
| Read Lock                                                           | 0=not support 1=support                                                               |                  | 12              | 0b                  |       |
| Permanent Lock                                                      | 0=not support 1=support                                                               |                  | 13              | 1b                  |       |
| Unused                                                              |                                                                                       |                  | 15:14           | 11b                 |       |
| Unused                                                              |                                                                                       |                  | 31:16           | FFFFH               | FFFFH |

## 6. Ordering Information

|                                 | ZD              | 25XX | XX | X | - | X | X | X | X |
|---------------------------------|-----------------|------|----|---|---|---|---|---|---|
| Company Designator              | ZD:Zetta device |      |    |   |   |   |   |   |   |
| Product serial                  |                 |      |    |   |   |   |   |   |   |
| 25WD: 1.65~3.6V Dual SPI NOR    |                 |      |    |   |   |   |   |   |   |
| 25WQ: 1.65~3.6V Quad SPI NOR    |                 |      |    |   |   |   |   |   |   |
| Memory density                  |                 |      |    |   |   |   |   |   |   |
| 20: 2Mbit                       |                 |      |    |   |   |   |   |   |   |
| 40: 4Mbit                       |                 |      |    |   |   |   |   |   |   |
| 80: 8Mbit                       |                 |      |    |   |   |   |   |   |   |
| 16: 16Mbit                      |                 |      |    |   |   |   |   |   |   |
| Generation                      |                 |      |    |   |   |   |   |   |   |
| B: B version                    |                 |      |    |   |   |   |   |   |   |
| Package type                    |                 |      |    |   |   |   |   |   |   |
| T: 150mil SOP8                  |                 |      |    |   |   |   |   |   |   |
| O: 173mil TSSOP8                |                 |      |    |   |   |   |   |   |   |
| U: USON8 (3*2mm)                |                 |      |    |   |   |   |   |   |   |
| Temperature Range               |                 |      |    |   |   |   |   |   |   |
| I: Industrial (-40℃~85℃)        |                 |      |    |   |   |   |   |   |   |
| E: Extended (-25℃~85℃)          |                 |      |    |   |   |   |   |   |   |
| Green Code                      |                 |      |    |   |   |   |   |   |   |
| G: Low-halogen, Lead (Pb) -free |                 |      |    |   |   |   |   |   |   |
| P: Lead (Pb) - free             |                 |      |    |   |   |   |   |   |   |
| Packaging Type                  |                 |      |    |   |   |   |   |   |   |
| T: Tube                         |                 |      |    |   |   |   |   |   |   |
| R: Tape & Reel                  |                 |      |    |   |   |   |   |   |   |
| Y: Tray                         |                 |      |    |   |   |   |   |   |   |

## 7. Package Information

### 7.1-Lead SOP(150mil)



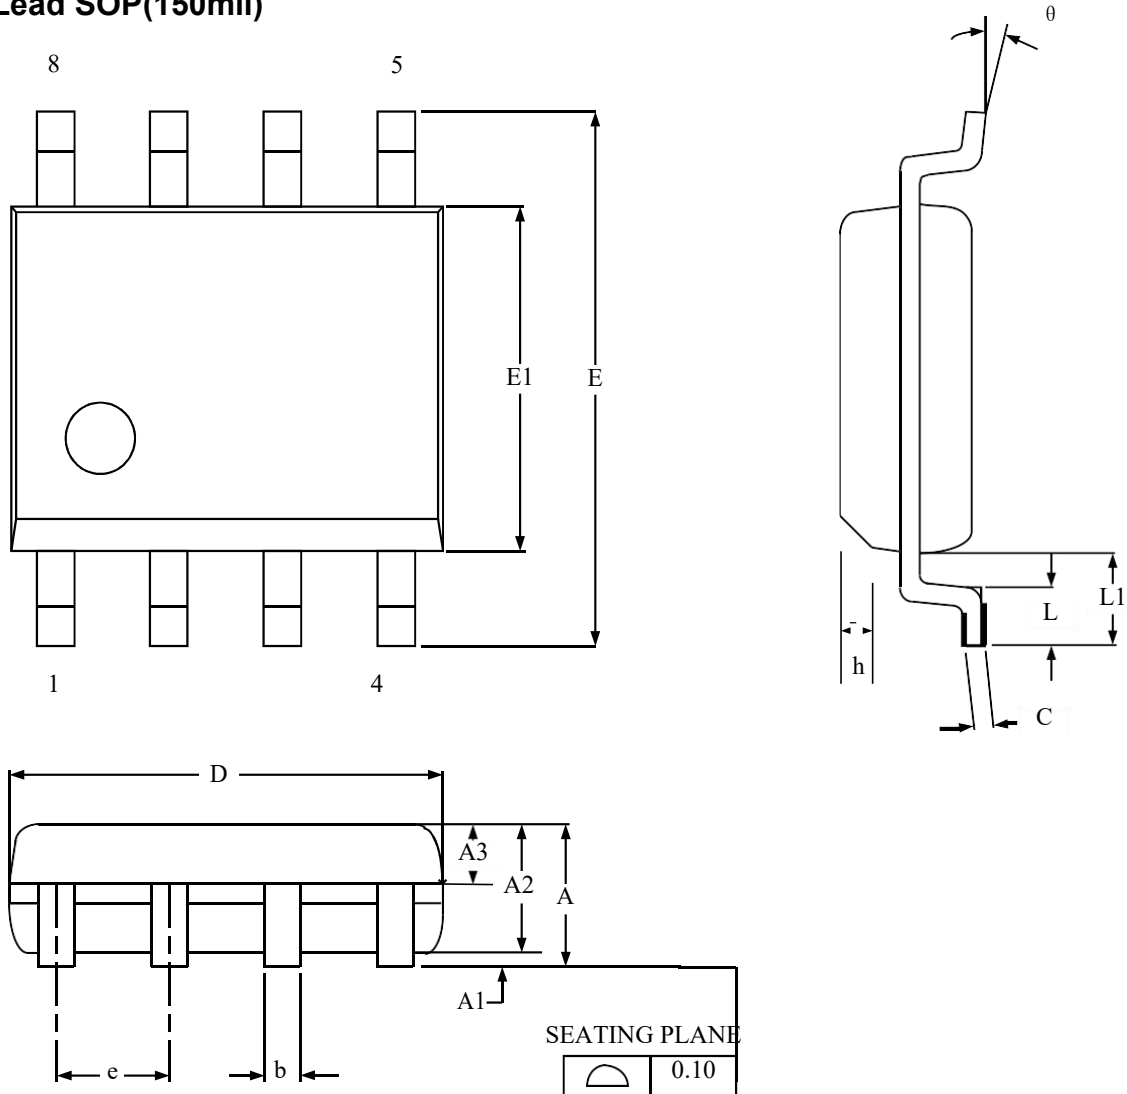


#### Dimensions

| Symbol |     | A     | A1    | A2    | A3    | b     | C     | D     | E     | E1    | e            | L     | L1    | h     | $\theta$ |
|--------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|-------|-------|-------|----------|
| Unit   |     |       |       |       |       |       |       |       |       |       |              |       |       |       |          |
| mm     | Min | -     | 0.10  | 1.30  | 0.6   | 0.39  | 0.20  | 4.80  | 5.80  | 3.80  | 1.27<br>BSC  | 0.50  | 1.05  | 0.25  | 0        |
|        | Nom | -     | -     | 1.40  | 0.65  | -     | -     | 4.90  | 5.90  | 3.90  |              | -     |       | -     | -        |
|        | Max | 1.75  | 0.225 | 1.50  | 0.7   | 0.47  | 0.24  | 5.00  | 6.20  | 4.00  |              | 0.80  |       | 0.50  | 8        |
| Inch   | Min | -     | 0.004 | 0.051 | 0.024 | 0.015 | 0.008 | 0.189 | 0.228 | 0.150 | 0.050<br>BSC | 0.020 | 0.041 | 0.010 | 0        |
|        | Nom | -     | -     | 0.055 | 0.026 | -     | -     | 0.193 | 0.236 | 0.154 |              | -     |       | -     | -        |
|        | Max | 0.069 | 0.009 | 0.059 | 0.028 | 0.019 | 0.009 | 0.197 | 0.244 | 0.158 |              | 0.031 |       | 0.020 | 8        |

| TITLE              | DRAWING NO. | REV | REF          |
|--------------------|-------------|-----|--------------|
| 8-Lead SOP(150mil) |             | A   | JEDEC MS-012 |

## 7.2-Lead SOP(208mil)

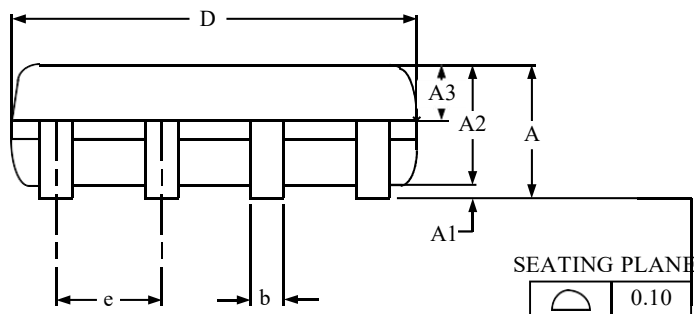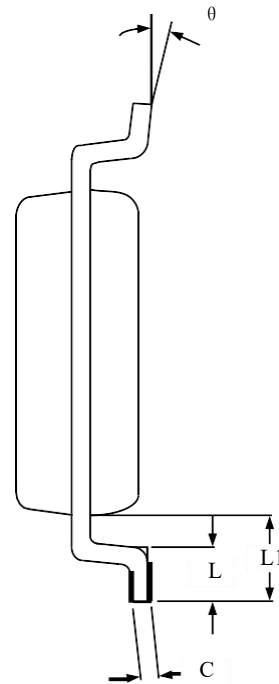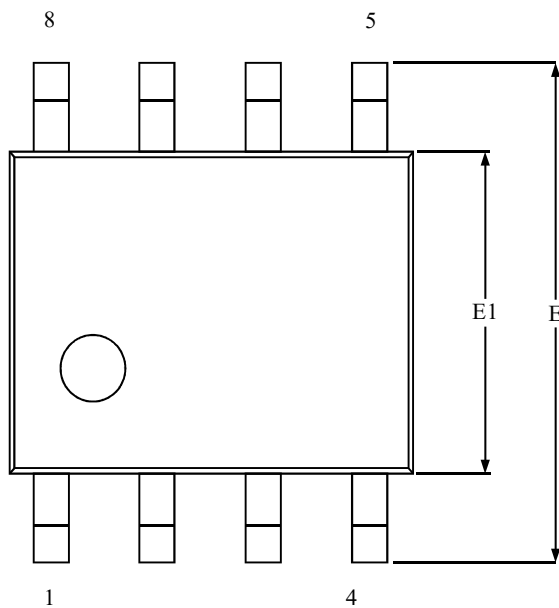


## Dimensions

| Symbol |     | A     | A1    | A2    | A3    | b     | C            | D     | E     | E1    | e            | L     | L1    | $\theta$ |
|--------|-----|-------|-------|-------|-------|-------|--------------|-------|-------|-------|--------------|-------|-------|----------|
| Unit   |     |       |       |       |       |       |              |       |       |       |              |       |       |          |
| mm     | Min | 1.75  | 0.05  | 1.70  | 0.55  | 0.38  | 0.203<br>REF | 5.13  | 7.70  | 5.18  | 1.27<br>REF  | 0.50  | 1.21  | 0        |
|        | Nom | 1.9   | 0.1   | 1.80  | 0.60  | 0.43  |              | 5.23  | 7.90  | 5.28  |              | 0.65  | 1.31  | -        |
|        | Max | 2.05  | 0.15  | 1.90  | 0.65  | 0.48  |              | 5.33  | 8.10  | 5.38  |              | 0.80  | 1.41  | 8        |
| Inch   | Min | 0.069 | 0.002 | 0.067 | 0.022 | 0.015 | 0.008<br>REF | 0.202 | 0.303 | 0.204 | 0.050<br>REF | 0.020 | 0.048 | 0        |
|        | Nom | 0.075 | 0.004 | 0.071 | 0.024 | 0.017 |              | 0.206 | 0.311 | 0.208 |              | 0.026 | 0.052 | -        |
|        | Max | 0.081 | 0.006 | 0.075 | 0.026 | 0.019 |              | 0.210 | 0.319 | 0.212 |              | 0.031 | 0.056 | 8        |

| TITLE              | DRAWING NO. | REV | REF |
|--------------------|-------------|-----|-----|
| 8-Lead SOP(208mil) |             | A   |     |

## 7.3-Lead TSSOP(173mil)

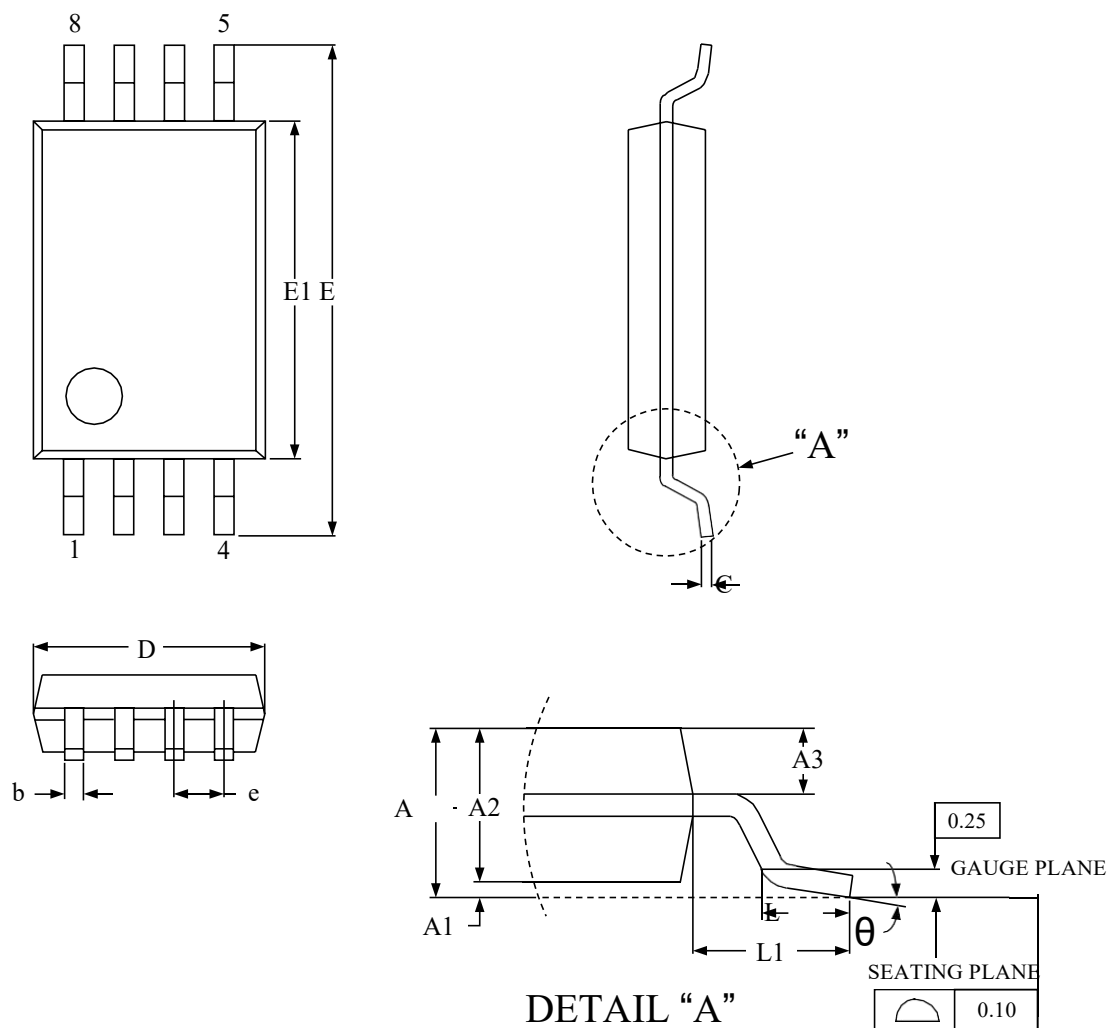


## Dimensions

| Symbol |     | A     | A1    | A2    | A3    | b     | C     | D     | E     | E1    | e            | L     | L1           | θ |
|--------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|-------|--------------|---|
| Unit   |     |       |       |       |       |       |       |       |       |       |              |       |              |   |
| mm     | Min | -     | 0.05  | 0.90  | 0.39  | 0.20  | 0.13  | 2.90  | 6.20  | 4.30  | 0.65<br>BSC  | 0.45  | 1.00<br>REF  | 0 |
|        | Nom | -     | -     | 1.00  | 0.44  | -     | -     | 3.00  | 6.40  | 4.40  |              | -     |              | - |
|        | Max | 1.20  | 0.15  | 1.05  | 0.49  | 0.28  | 0.17  | 3.10  | 6.60  | 4.50  |              | 0.75  |              | 8 |
| Inch   | Min | -     | 0.002 | 0.035 | 0.015 | 0.008 | 0.005 | 0.114 | 0.244 | 0.169 | 0.026<br>BSC | 0.018 | 0.039<br>REF | 0 |
|        | Nom | -     | -     | 0.039 | 0.017 | -     | -     | 0.118 | 0.252 | 0.173 |              | -     |              | - |
|        | Max | 0.047 | 0.006 | 0.041 | 0.019 | 0.011 | 0.007 | 0.122 | 0.260 | 0.177 |              | 0.030 |              | 8 |


| TITLE        | DRAWING NO. | REV | REF          |
|--------------|-------------|-----|--------------|
| 8-lead TSSOP |             | A   | JEDEC MO-153 |

7.4-Land USON(3x2mm, thickness 0.45/0.55mm)

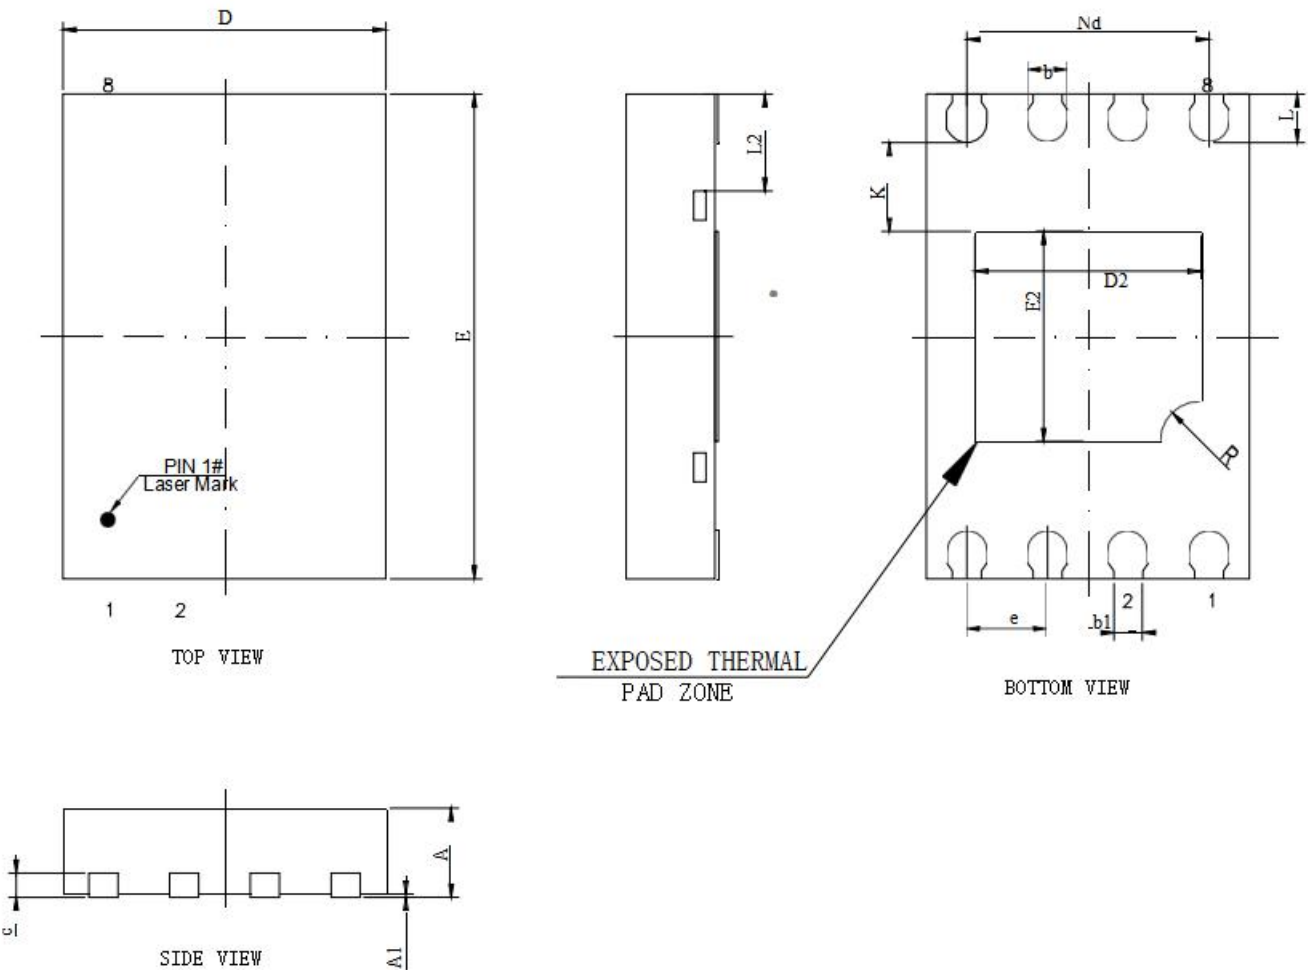


| SYMBOL     |     | A    |      | A1   | b    | b1      | c        | D   | D2  | e       | Nd      | E   | E2  | L    | R    | K    | L2  |
|------------|-----|------|------|------|------|---------|----------|-----|-----|---------|---------|-----|-----|------|------|------|-----|
| MILLIMETER | MIN | 0.5  | 0.4  | 0    | 0.2  | 0.18REF | 0.152REF | 1.9 | 1.3 | 0.50BSC | 1.50BSC | 2.9 | 1.2 | 0.25 | 0.2  | 0.5  | 0.6 |
|            | NOM | 0.55 | 0.45 | 0.02 | 0.25 |         |          | 2   | 1.4 |         |         | 3   | 1.3 | 0.3  | 0.25 | 0.55 | -   |
|            | MAX | 0.6  | 0.5  | 0.05 | 0.3  |         |          | 2.1 | 1.5 |         |         | 3.1 | 1.4 | 0.35 | 0.3  | 0.6  | -   |


## 7.5-Land WSON(6x5mm)

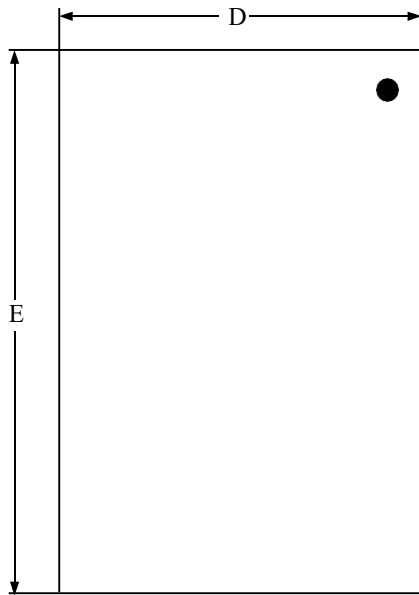

TOP VIEW

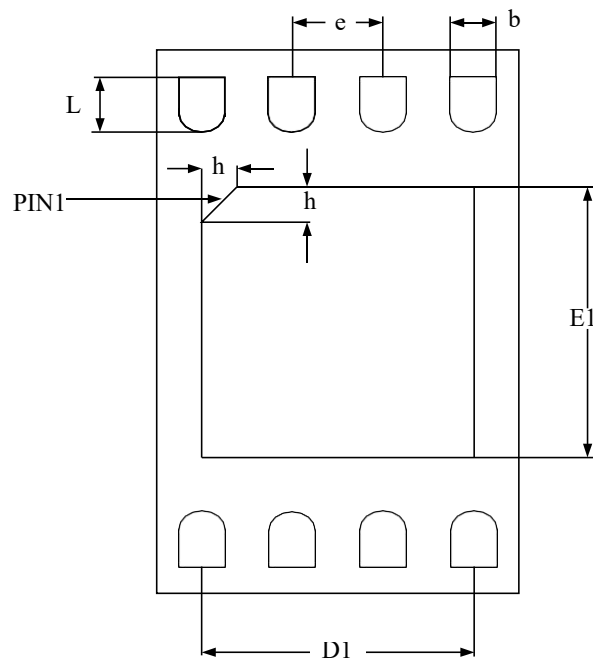

BOTTOM VIEW

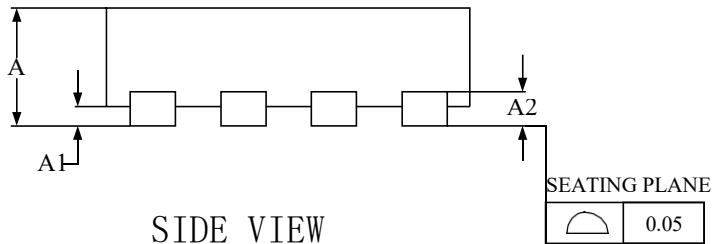

SIDE VIEW

## Dimensions

| Symbol |     | A     | A1    | A2    | b     | D     | D1    | E     | E1    | e    | L     | h     |
|--------|-----|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|-------|
| Unit   |     |       |       |       |       |       |       |       |       |      |       |       |
| mm     | Min | 0.70  | 0.00  | -     | 0.35  | 4.90  | 3.90  | 5.90  | 3.30  | -    | 0.50  | 0.30  |
|        | Nom | 0.75  | 0.02  | 0.203 | 0.40  | 5.00  | 4.00  | 6.00  | 3.40  | 1.27 | 0.60  | 0.35  |
|        | Max | 0.80  | 0.05  | -     | 0.48  | 5.10  | 4.10  | 6.10  | 3.50  | -    | 0.75  | 0.40  |
| Inch   | Min | 0.028 | 0.000 | -     | 0.014 | 0.193 | 0.154 | 0.232 | 0.129 | -    | 0.020 | 0.033 |
|        | Nom | 0.030 | -     | 0.008 | 0.016 | 0.197 | 0.157 | 0.236 | 0.134 | 0.05 | 0.024 | 0.039 |
|        | Max | 0.032 | 0.002 | -     | 0.019 | 0.201 | 0.161 | 0.240 | 0.138 | -    | 0.030 | 0.045 |

| TITLE                 | DRAWING NO. | REV | REF          |
|-----------------------|-------------|-----|--------------|
| DFN8 (0506X0.75-1.27) |             | A   | JEDEC MO-220 |

## 8. Revision History

| Rev. | Date       | Description                |
|------|------------|----------------------------|
| 1.0  | 2020-01-02 | Initial Release            |
| 1.1  | 2020-05-10 | Modify Package Information |
|      |            |                            |

